
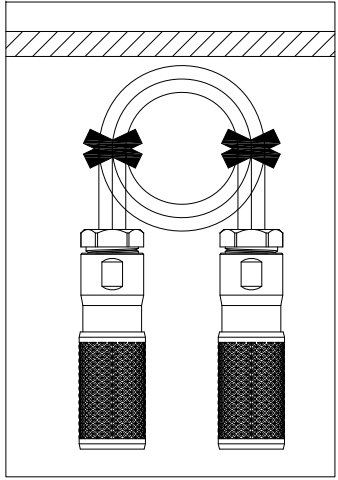



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
0		New Release	3/SEP/24	LIN	FRANK

Note:
 1. *Important Dimension
 2. Waterproof Rate: IP68 【when mated】
 3. This product must meet IEC61076-2-106
 4. This product must meet 2011/65/EU ROHS compliance.
 5. Not note tolerances: ±0.20

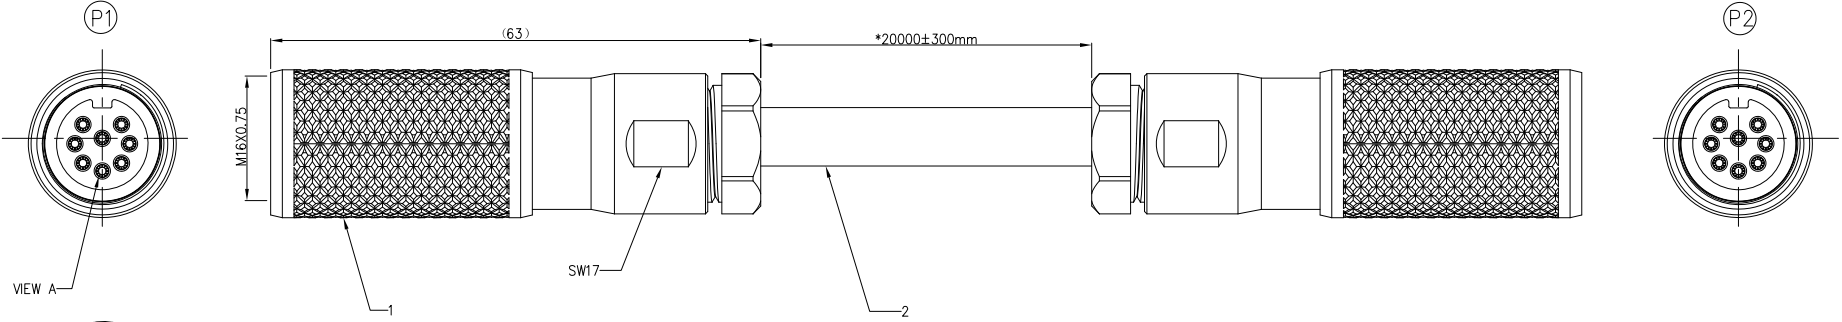

P1	P2	Colour	AWG
1	1	white	22AWG
2	2	brown	22AWG
3	3	green	22AWG
4	4	yellow	22AWG
5	5	grey	22AWG
6	6	pink	22AWG
7	7	blue	22AWG
8	8	red	22AWG
Shell	Shell	braid	

* Note: All Materials Meet The "RoHs" !

2	3P*22AWG+2C*22AWG	1PC
1	M16X0.75 female connector	2PCS
NO.	SPECIFICATION	NOTE

ELECTRICAL	
1.	Withstanding Voltage: DC 300V
2.	Conduction Impedance: 1Ω (Max)
3.	Insulation Resistance: 10MΩ (Min)
PACKING SPECIFICATION	
1.	2pcs/Bag
2.	"*" as the key size control
NOTES	
1.	This product must meet UL486A-1991 mechanical performance
2.	This product must meet 2011/65/EU ROHS compliance

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Building Technology Cornerstone		
	X.±.012(0.30)	.X'±5'	FRANK	3/SEP/24	FCW002-00000333-00	FCW002			
	DESIGN UNITS Metric	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		REV 0	SHEET NO. 1/1
	SCALE 2:1	X.XX±.006(0.15)	.XX±1'	CHERRY	3/SEP/24	M16X0.75 8PIN female Plug With Shield Straight L=20M			
	X.XXX±.004(0.10)	.XXX±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
			DANIEL	3/SEP/24					