


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

1 2 3 4 5 6 7 8

A
B
C
D
E
F

A
B
C
D
E
F

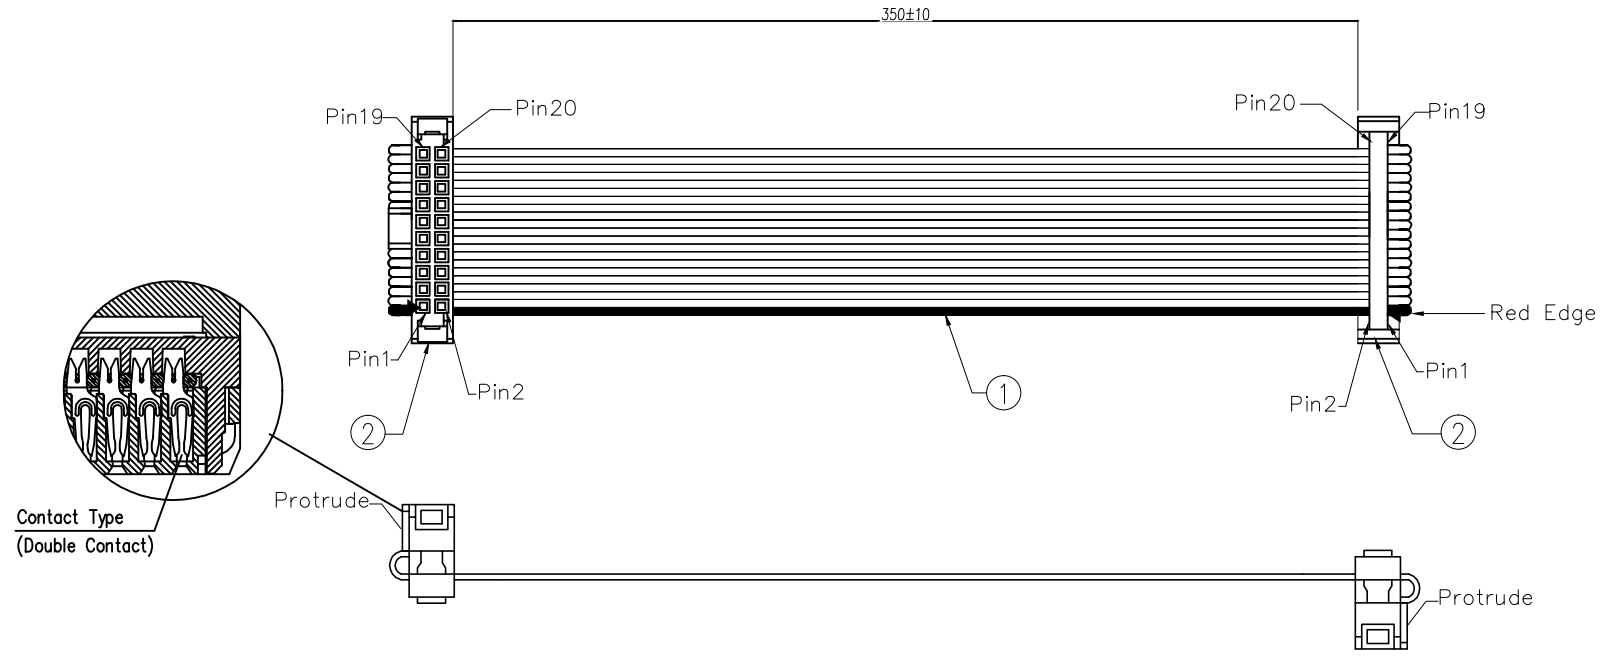

PIN ASSIGNMENT

P1	P2
PIN1	PIN1
PIN2	PIN2
PIN3	PIN3
⋮	
PIN19	PIN19
PIN20	PIN20

- Electrical
- Withstanding Voltage: DC 300V
 - Conduction impedance 1Ω (MAX)
 - Insulation Resistance: 10MΩ (MIN)
- Packing specification
- 60pcs/Bag

* Note: All Materials Meet The "RoHs" !

②	IDC 2.54mm 20Circuits(3 Assemblies):ID25408-204K6K
①	UL2651 #28 20C Pitch:1.27 Flat Cable
NO.	Specification

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Leader Of Industry</p>
	X. ±0.30	X.* ±5'	CHECKED BY	DATE	FCW003-000040	FCW003	
	X.X ±0.20	X.X' ±2'	KATE	06/MAR/18			
	X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE	IDC Cable	REV 1	
SCALE	SIZE	X.XXX ±0.10	X.XXX' ±0.5'	DANIEL	06/MAR/18	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4						

1 2 3 4 5 6 7 8