





REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

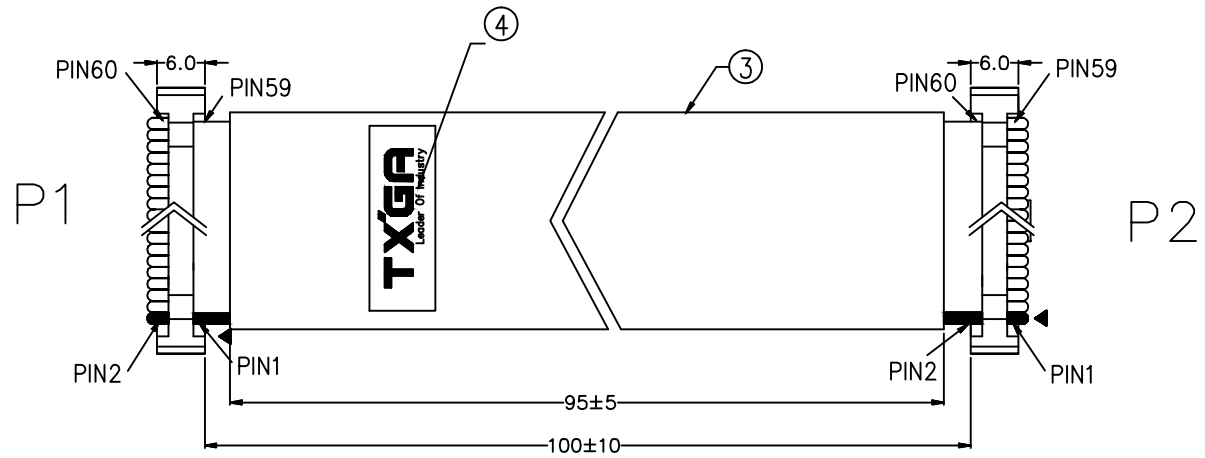

Description: Heat shrinkable casing without heating thermal shrinkage.



\* Note: All Materials Meet The "RoHs" !

4	Label 12*30*0.09mm, Printing TXGA: R-LABEL-05
3	Black Heat Shrink Tube $\varnothing$ 40.0mm: R-4HA-24
2	UL2651 28AWG(7/0.12TS) 60C Pitch 1.0 Gray: 2651-28-60G101-UL
1	Pitch 2.00mm IDC 60Pin 3set Black: ID20004-604K6K
NO.	Specification

PIN ASSIGNMENT		Electrical	
P1		P2	
PIN1	Red	PIN1	
PIN2	Gray	PIN2	
PIN3	Gray	PIN3	
	⋮		
PIN59	Gray	PIN59	
PIN60	Gray	PIN60	

1. Withstanding Voltage: DC 300V  
 2. Conduction impedance: 3 $\Omega$  (MAX)  
 3. Insulation Resistance: 10M $\Omega$  (MIN)
- Packing specification  
 1. 50pcs/Bag

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.
	X. $\pm$ 0.30	X.* $\pm$ 5'	FRANK	09/SEP/16	FCW003-000081	FCW003
DESIGN UNITS Metric	X.X $\pm$ 0.20	X.X* $\pm$ 2'	CHECKED BY	DATE	TITLE	
	X.XX $\pm$ 0.15	X.XX* $\pm$ 1'	CHERRY	09/SEP/16	IDC Cable	
SCALE 5:1	SIZE A4	X.XXX $\pm$ 0.10	X.XXX* $\pm$ 0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
				VERNON	09/SEP/16	

 Leader Of Industry	
REV 0	SHEET NO. 1/1