


1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

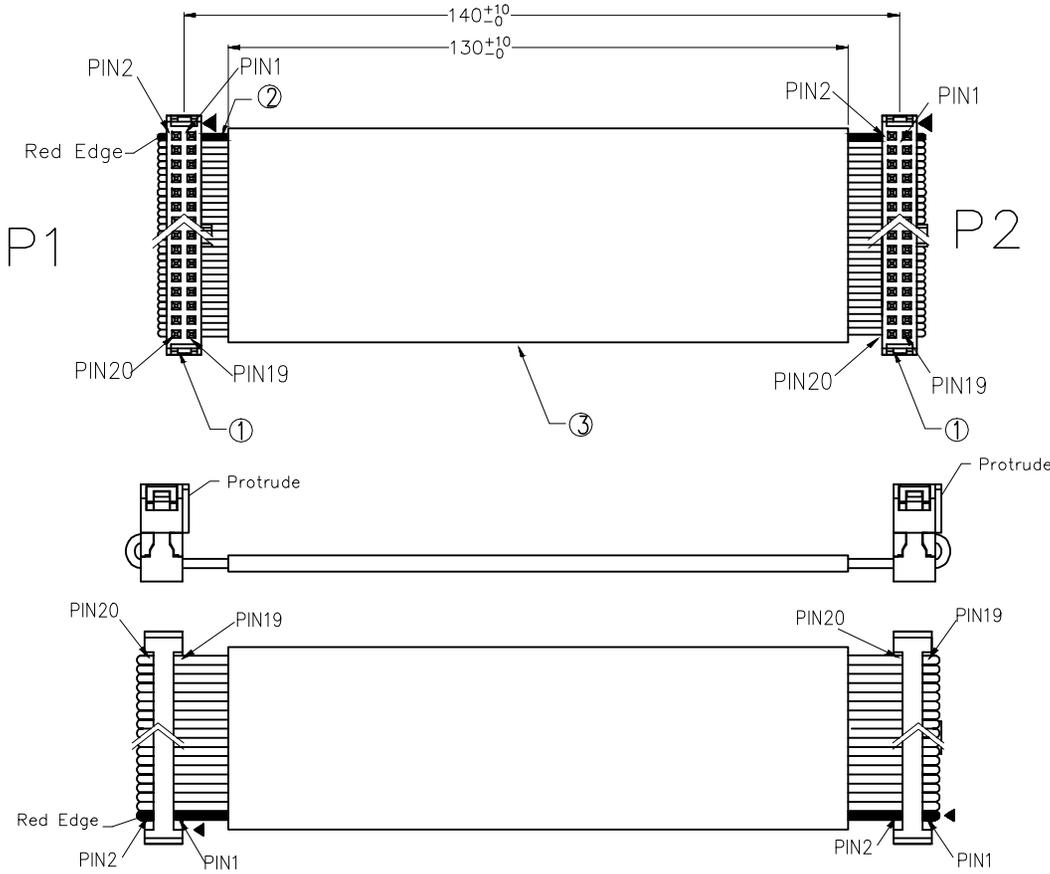

- Electrical
1. Withstanding Voltage: DC 300V
 2. Conduction impedance: 0.14Ω (MAX)
 3. Insulation Resistance: 10MΩ (MIN)
- Packing specification
1. 60pcs/Bag

PIN ASSIGNMENT

P1	P2
PIN1 Red	PIN1
PIN2 Gray	PIN2
PIN3 Gray	PIN3
...	
PIN19 Gray	PIN19
PIN20 Gray	PIN20

* Note: All Materials Meet The "RoHs" !

2	UL2651 28AWG(7/0.12TS) 20C Pitch 1.27 Gray. 2651-28-20G102-UL
1	IDC 20Pin Gray. R-810-2010
NO.	Specification

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X. ±0.30	X.' ±5'	VERNON	08/AUG/17	FCW003-000085	FCW003	
DESIGN UNITS Metric	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		REV 0 SHEET NO. 1/1
	X.XX ±0.15	X.XX' ±1'	KATE	08/AUG/17	IDC Flat cable assemblies		
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
				LXF	08/AUG/17		

1 2 3 4 5 6 7 8