


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
					<

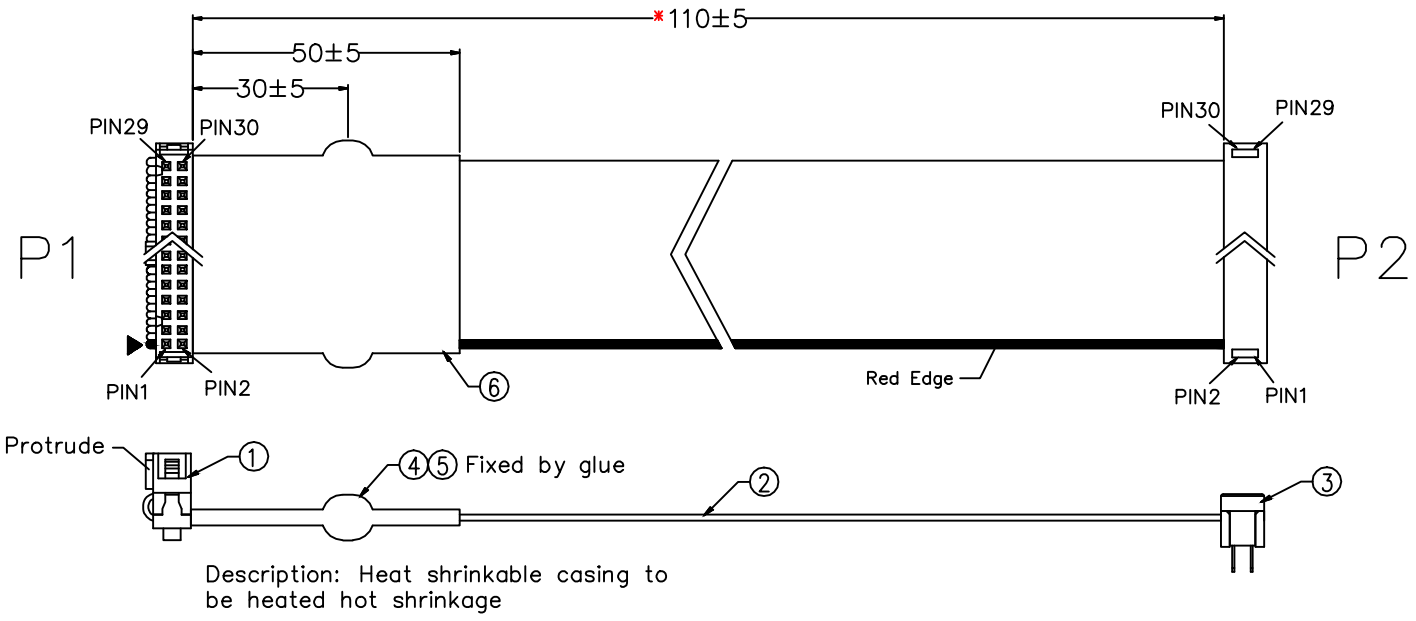

* Note: All Materials Meet The "RoHs" !

PIN ASSIGNMENT

P1		P2
PIN1	Red	PIN1
PIN2	Gray	PIN2
PIN3	Gray	PIN3
	⋮	
PIN29	Gray	PIN29
PIN30	Gray	PIN30

- Electrical**
1. Withstanding Voltage: DC 300V
 2. Conduction impedance: 3Ω (MAX)
 3. Insulation Resistance: 500MΩ (MIN)
- Packing specification**
1. 50pcs/Bag, 800pcs/Box

NO.	Specification
6	Black Heat Shrink Tube: Ø30mm
5	Glue: DX-458G
4	EMI CORE 45.2*6.5*12mm
3	Pitch 2.54mm IDC 30Pin 2set Black: ID25403-303K6K
2	UL2651 28AWG(7/0.12TS) 30C Pitch 1.27mm Gray: 2651-28-30G102-UL
1	Pitch 2.54mm IDC 30Pin 3set Black: ID25402-303K6K

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X.±5'	FRANK	30/NOV/15	FCW003-000086	FCW003	
	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		
	X.XX±.006(0.15)	.XX'±1'	CHERRY	30/NOV/15	IDC Flat cable assemblies		
SCALE	SIZE	X.XXX±.004(0.10)	.XXX'±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4			KATE	30/NOV/15	REV 0	SHEET NO. 1/1