


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	<span style="color:red">△</span> 1	Updata Connector Drawing	12-Jan-22		DENG

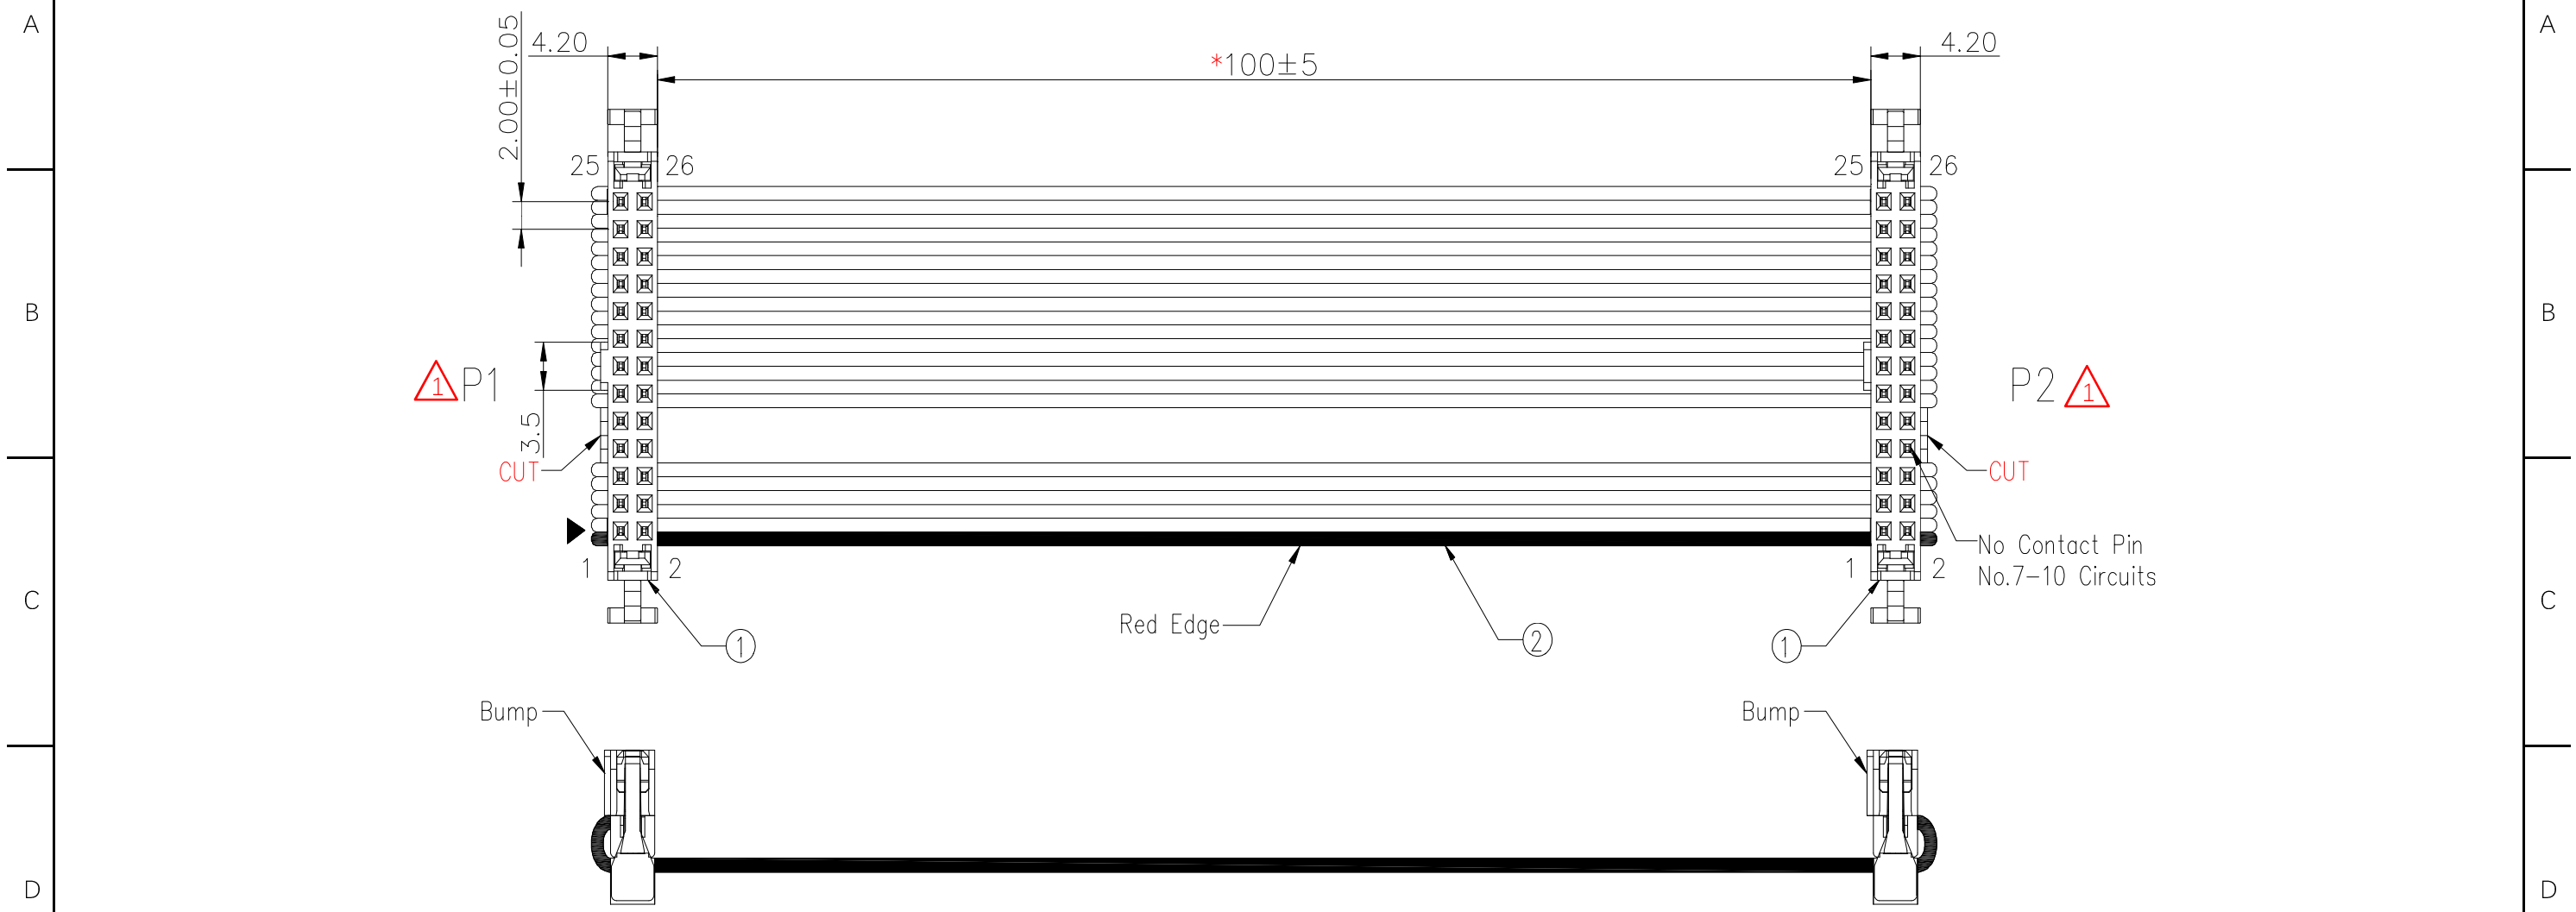

P1	P2	COLOR
1	1	RED
2	2	GRAY
3	3	GRAY
4	4	GRAY
5	5	GRAY
6	6	GRAY
11	11	GRAY
12	12	GRAY
13	13	GRAY
14	14	GRAY
15	15	GRAY

P1	P2	COLOR
16	16	GRAY
17	17	GRAY
18	18	GRAY
19	19	GRAY
20	20	GRAY
21	21	GRAY
22	22	GRAY
23	23	GRAY
24	24	GRAY
25	25	GRAY
26	26	GRAY

**ELECTRICAL**

1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

**PACKING SPECIFICATION**

1. 20pcs/Bundle,100pcs/Bag
- 2."\*"as the key size control

**NOTES**

- 1.This product must meet UL486A-1991mechanical performance.
- 2.This product must meet 2011/65/EU ROHS compliance.
- 3.Cable assembly to be tested 100% for continuity and polarity.

NO.	SPECIFICATION
2	UL2651 AWG28*22C Pitch: 1.0mm Gray
1	IDC 2mm (3Assemblies) 26 Circuits:ID20006-265BKB

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	DESIGN UNITS	X.±0.30	X.°±5°	FRANK	12/JAN/22	FCW003-000186	
Metric	XX±0.20	XX°±2°	CHECKED BY	DATE	TITLE		
SCALE	SIZE	X.XX±0.15	X.XX°±1°	DRAWN BY	DATE	IDC Cable	
5:1	A4	X.XXX±0.10	X.XXX°±0.5°	DENG	12/JAN/22	REV 1	SHEET NO. 1/1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							