


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

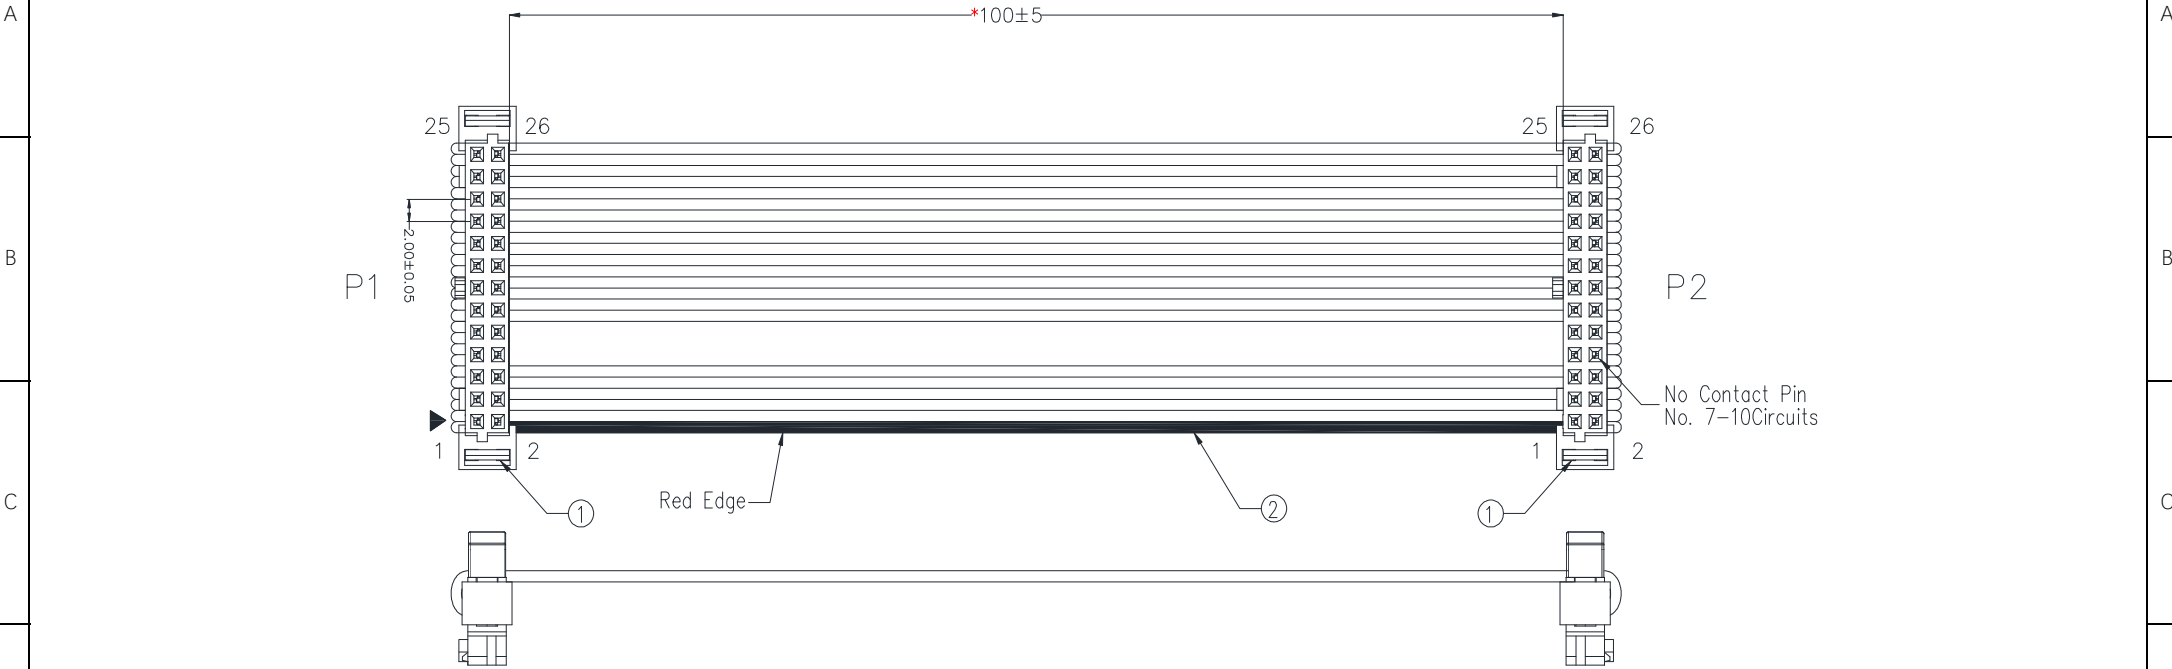

WIRING CHART		
P1	P2	COLOR
1	1	RED
2	2	GRAY
3	3	GRAY
4	4	GRAY
5	5	GRAY
6	6	GRAY
11	11	GRAY
12	12	GRAY
13	13	GRAY
14	14	GRAY
15	15	GRAY

WIRING CHART		
P1	P2	COLOR
16	16	GRAY
17	17	GRAY
18	18	GRAY
19	19	GRAY
20	20	GRAY
21	21	GRAY
22	22	GRAY
23	23	GRAY
24	24	GRAY
25	25	GRAY
26	26	GRAY

ELECTRICAL

1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

PACKING SPECIFICATION

1. 20pcs/Bundle,100pcs/Bag
- 2."*"as the key size control

NOTES

- 1.This product must meet UL486A-1991mechanical performance.
- 2.This product must meet 2011/65/EU ROHS compliance.
- 3.Cable assembly to be tested 100% for continuity and polarity.

2	UL2651 #28 22C Pitch:1.0 Grey
1	IDC 2mm (3 Assemblies) ,26Circuits:FID20008-261BKK
NO.	SPECIFICATION

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry	
DESIGN UNITS Metric		X.±0.30	X.°±5°	FRANK	13/JAN/21	FCW003-000187	FCW003		
SCALE 5:1		X.XX±0.20	X.X°±2°	CHECKED BY	DATE	TITLE IDC Cable			
SIZE A4		X.XXX±0.10	X.XX°±1°	CHERRY	13/JAN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/1
X.XXX±0.10		X.XX°±0.5°		DRAWN BY	DATE				
				JOE	13/JAN/21				