



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

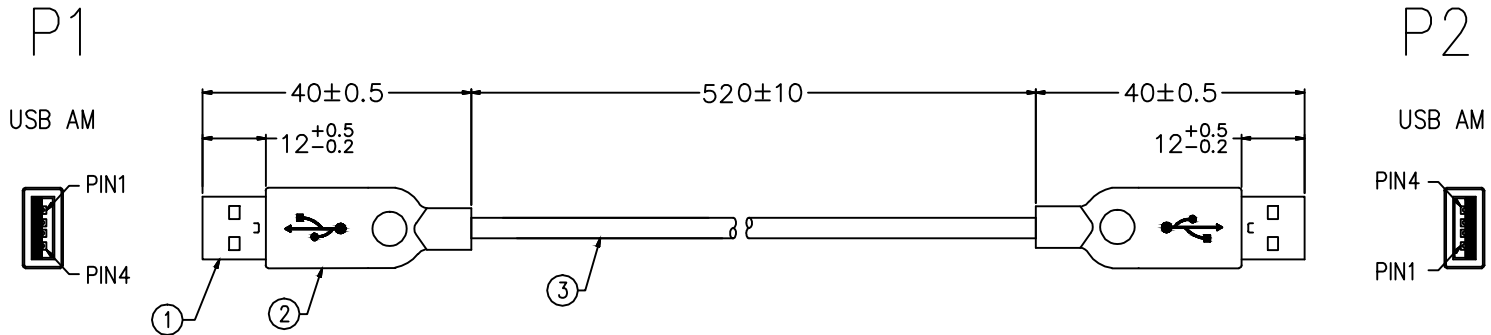

Packing specification:
1pcs/Bundle, 1pcs/Bag, 1000pcs/Box

PIN ASSIGNMENT			
P1	Red	P2	PIN1
PIN1	White	PIN2	PIN2
PIN2	Green	PIN3	PIN3
PIN3	Black	PIN4	PIN4
PIN4	Shield	Shield	Shield



* Note: All Materials Meet The "RoHs" !

3	UL2725 4C 28AWG, Alum-Mylar Foil Shielding With Drain Wire, OD=4.0mm Jacket Black
2	Molded PVC Black
1	USB A Male, Gold Flash On Contacts, White Insulator, Short Type
NO.	Specification

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X.±5'	FRANK	22/OCT/18	FCW004-000006	FCW004	
DESIGN UNITS	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
Inch (metric)	X.XX±.006(0.15)	.XX'±1'	CHERRY	22/OCT/18	CABLE: USB A Male To USB A Male L=250mm		
SCALE	X.XXX±.004(0.10)	.XXX'±0.5'	DRAWN BY	DATE	REV 0	SHEET NO. 1/1	
5:1			ANDY	22/OCT/18			