REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

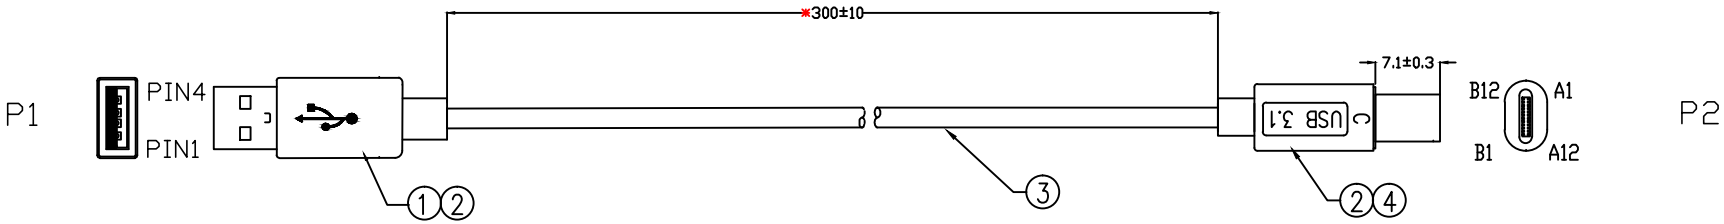

Test Electrical:
1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

Packing specification
25pcs/Bundle, 100pcs/Bag
"*" as the key size control

* Note: All Materials Meet The "RoHs" !

PIN ASSIGNMENT

P1		P2
PIN1	RED	A9,B4,A4,B9
PIN4	BLACK	B12.A1,B1,A12

NO.	Specification
4	TYPE C CONNECTOR MALE
3	UL2464 24AWG(11/0.16TS)*2C (RED BLACK) +PVC BLACK OD:3.5MM
2	Molded PVC Black
1	USB A TYPE 4PIN MALE

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/OCT/18	PART NO. FCW004-000016 / ITEM NO. FCW004
	X.±.012(0.30)	X.°±5°			
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X°±2°	CHECKED BY CHERRY	DATE 22/OCT/18	TITLE USB CALBE
	X.XX±.006(0.15)	.XX°±1°			
SCALE 5:1 / SIZE A4	X.XXX±.004(0.10)	.XXX°±0.5°	DRAWN BY ANDY	DATE 22/OCT/18	REV 0 / SHEET NO. 1/1

TXGA Leader Of Industry

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION