REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

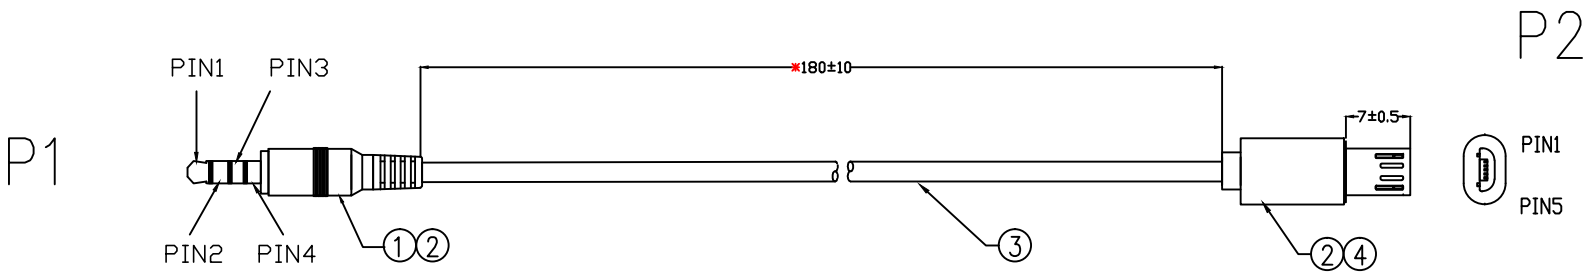

Test Electrical:
1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

Packing specification
50pcs/Bundle, 500pcs/Bag
"*" as the key size control

* Note: All Materials Meet The "RoHs" !

PIN ASSIGNMENT

P1		P2
PIN4	RED	PIN4
PIN3	BLACK	PIN5

NO.	Specification
4	MICRO USB 5PIN MALE BLACK
3	UL2725 28AWG(7/0.12TS)*2C (RED BLACK) OD:3.0MM
2	Molded PVC Black
1	ø3.5 4PIN PHONE PLUG NICKEL PLATED

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 22/OCT/18	PART NO. FCW004-000020 / ITEM NO. FCW004
DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.°±5°	CHECKED BY CHERRY	DATE 22/OCT/18	TITLE USB CALBE
SCALE 5:1 / SIZE A4	X.XX±.006(0.15)	.XX°±1°	DRAWN BY ANDY	DATE 22/OCT/18	REV 0 / SHEET NO. 1/1
	X.XXX±.004(0.10)	.XXX°±0.5°			

TXGA Leader Of Industry

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION