


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical
 1. Withstanding Voltage: DC 500V
 2. Conduction impedance: 1Ω (MAX)
 3. Insulation Resistance: 10MΩ (MIN)

Packing specification
 1. 1pcs/Bundle, 1pcs/Bag

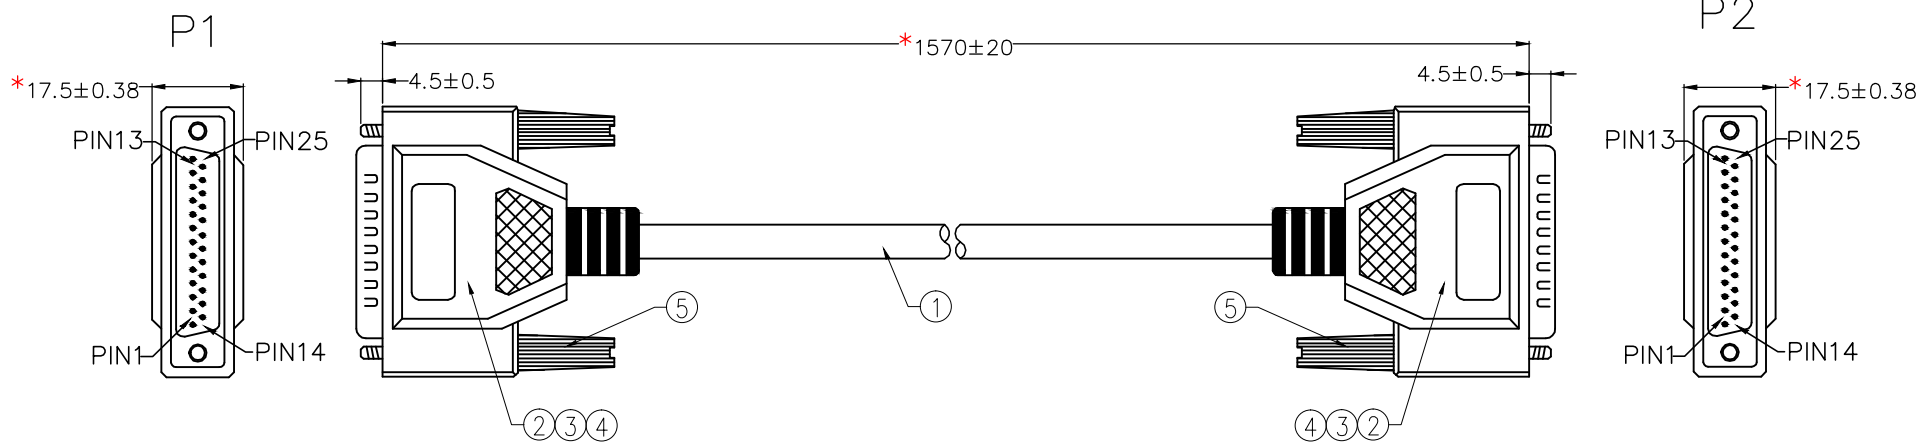

PIN ASSIGNMENT

P1	P2	P1	P2
PIN1 <u>Black</u>	PIN1	PIN14 <u>Brown/White</u>	PIN14
PIN2 <u>Brown</u>	PIN2	PIN15 <u>Red/White</u>	PIN15
PIN3 <u>Red</u>	PIN3	PIN16 <u>Orange/White</u>	PIN16
PIN4 <u>Orange</u>	PIN4	PIN17 <u>Green/White</u>	PIN17
PIN5 <u>Yellow</u>	PIN5	PIN18 <u>Blue/White</u>	PIN18
PIN6 <u>Green</u>	PIN6	PIN19 <u>Purple/White</u>	PIN19
PIN7 <u>Blue</u>	PIN7	PIN20 <u>Red/Black</u>	PIN20
PIN8 <u>Purple</u>	PIN8	PIN21 <u>Orange/Black</u>	PIN21
PIN9 <u>Gray</u>	PIN9	PIN22 <u>Yellow/Black</u>	PIN22
PIN10 <u>White</u>	PIN10	PIN23 <u>Green/Black</u>	PIN23
PIN11 <u>Pink</u>	PIN11	PIN24 <u>Gray/Black</u>	PIN24
PIN12 <u>Light Green</u>	PIN12	PIN25 <u>The Pink/Black</u>	PIN25
PIN13 <u>Black/White</u>	PIN13	Shield <u>Braid</u>	Shield

* Note: All Materials Meet The "RoHs" !

5	Screw: 4*47
4	External Mould: 45P PVC Beige
3	Internal Mould: LD PE
2	D-USB: DB25 Male White
1	UL2464 24AWG(11/0.16TS) 25C+AL+Braid 60%, Jacket Beige OD=9.5
NO.	Specification

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X'.±5'	VERNON	13/OCT/17	FCW007-000052	FCW007	
	DESIGN UNITS (mm)	X.XX±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE	
SCALE	SIZE	X.XX±.006(0.15)	.XX'±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4	X.XXX±.004(0.10)	.XXX'±0.5'	LXF	13/OCT/17	REV 0	SHEET NO. 1/1