


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	①	Change Model	29-Apr-21		DENG
2	②	Add Dust Cover	13-Jan-22		DENG

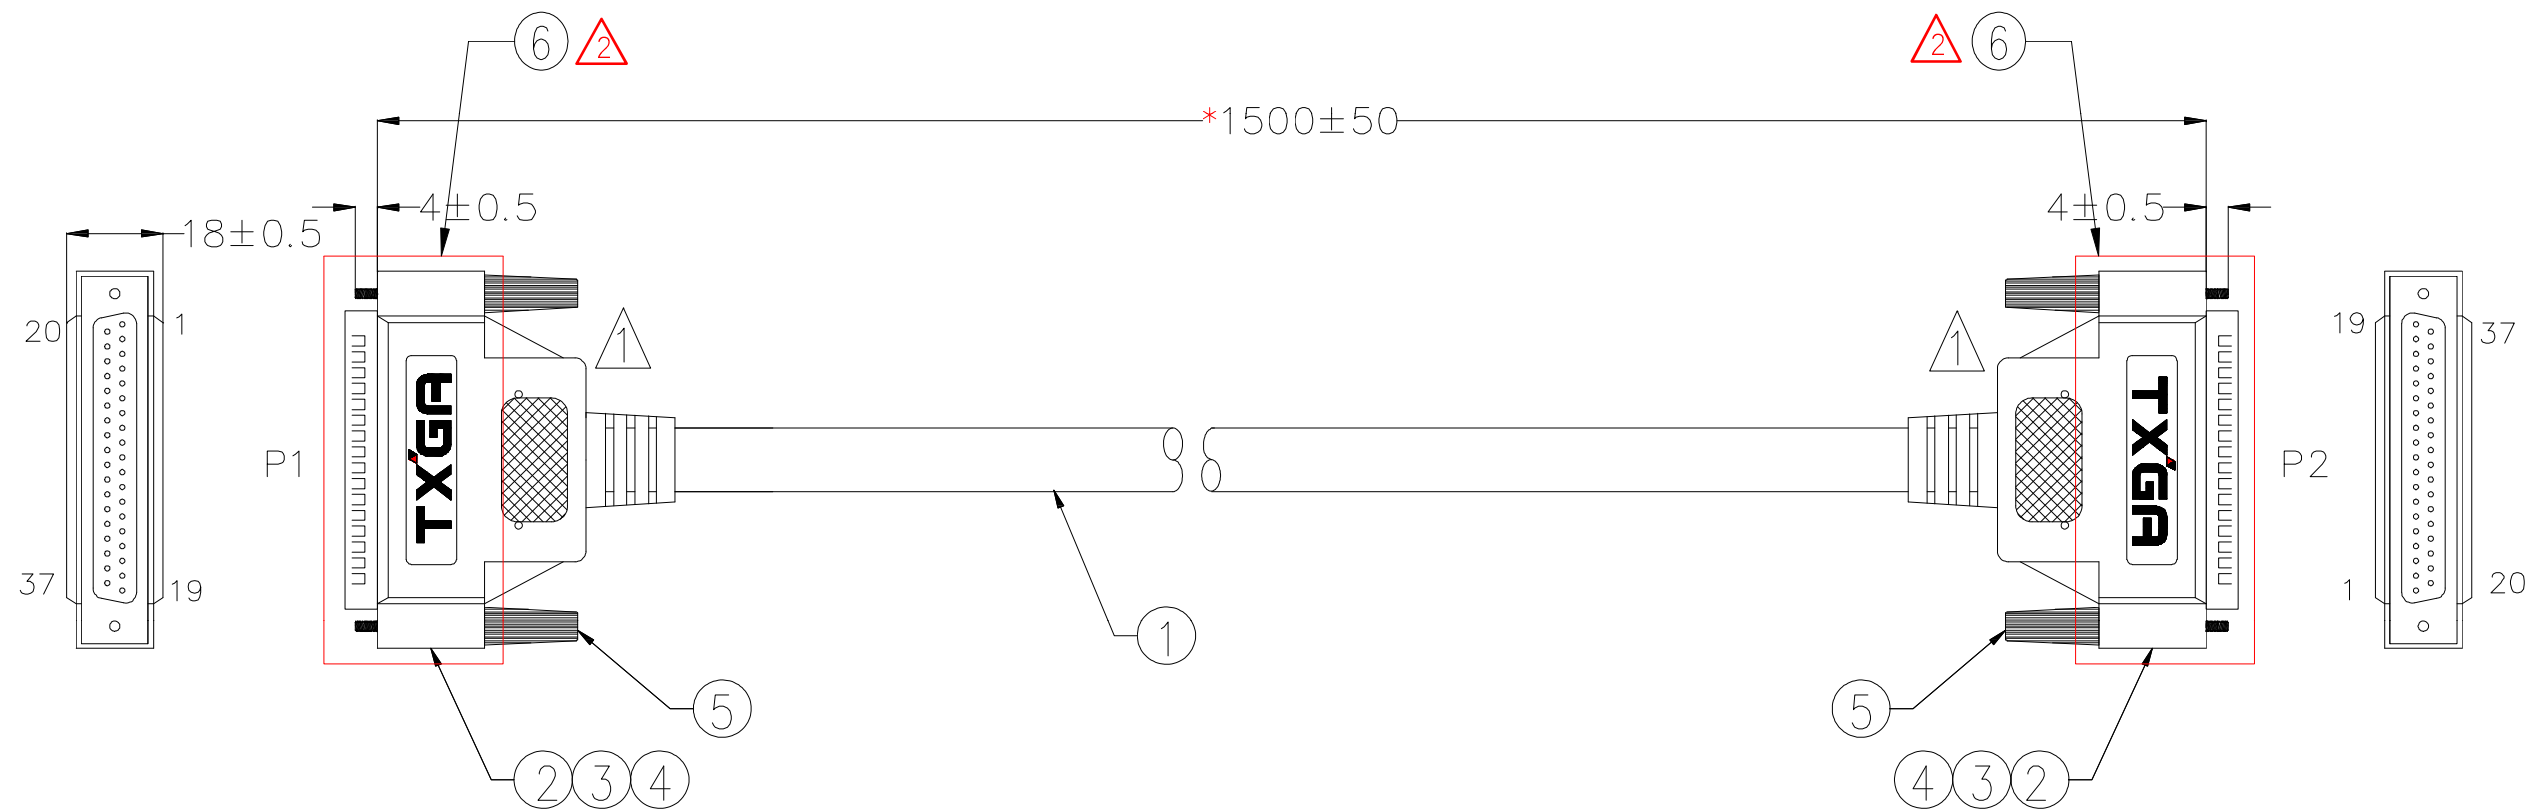

**ELECTRICAL**

- 1. Withstanding Voltage: DC 300V
- 2. Conduction impedance: 110mΩ (MAX)
- 3. Insulation Resistance: 10MΩ (MIN)


**PACKING SPECIFICATION**

- 1. 1pcs/Bundle,1pcs/Bag
- 2. "\*" as the key size control

**NOTES**

- 1. This product must meet UL486A-1991 mechanical performance.
- 2. This product must meet 2011/65/EU ROHS compliance.
- 3. Cable assembly to be tested 100% for continuity and polarity.

NO.	SPECIFICATION
② 6	PET Material Length 73.2 width 18.7, QTy 1, DB62(DB37) Tray
5	Long Screw 4-40NUC, 24mm R-6AA-18
4	External mould: 45P PVC Beige
3	Internal Mould: LD-PE
2	Machined pin D-SUB Male 37Circuits DM3703-M0WS101W1K
1	Cable: UL2464 22AWG(17/0.16TS) 37C Jacket Beige OD=12mm

THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 <b>Leader Of Industry</b>	
		X.±0.30	X.°±5°	FRANK	13/JAN/22	FCW007-000107	FCW007		
DESIGN UNITS Metric		XX±0.20	XX°±2°	CHECKED BY	DATE	TITLE			
SCALE	SIZE	X.XX±0.15	X.XX°±1°	DRAWN BY	DATE	D-SUB Cable			
5:1	A4	X.XXX±0.10	X.XXX°±0.5°	DENG	13/JAN/22	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 2	SHEET NO. 1/2

1

2

3

4

5

6

7

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	1	Change Model	29-Apr-21		DENG
2	2	Add Dust Cover	13-Jan-22		DENG

A

A

WIRING CHART	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19

WIRING CHART	
P1	P2
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
SHELL	SHELL

B

B

C

C

D

D

ELECTRICAL

- 1. Withstanding Voltage: DC 300V
- 2. Conduction impedance: 110mΩ (MAX)
- 3. Insulation Resistance: 10MΩ (MIN)

PACKING SPECIFICATION

- 1. 1pcs/Bundle,1pcs/Bag
- 2."\*"as the key size control

NOTES



- 1.This product must meet UL486A-1991mechanical performance.
- 2.This product must meet 2011/65/EU ROHS compliance.
- 3.Cable assembly to be tested 100% for continuity and polarity.

E

E

F

F

NO.		SPECIFICATION					
 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 13/JAN/22	PART NO. FCW007-000107	ITEM NO. FCW007	
	DESIGN UNITS Metric	X.±0.30 XX±0.20	X.°±5° X.X°±2°	CHECKED BY CHERRY	DATE 13/JAN/22	 <b>TXGA</b> Leader Of Industry	
SCALE 5:1	SIZE A4	X.XX±0.15 X.XXX±0.10	X.XX°±1° X.XXX°±0.5°	DRAWN BY DENG	DATE 13/JAN/22		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

1

2

3

4

5

6

7