


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

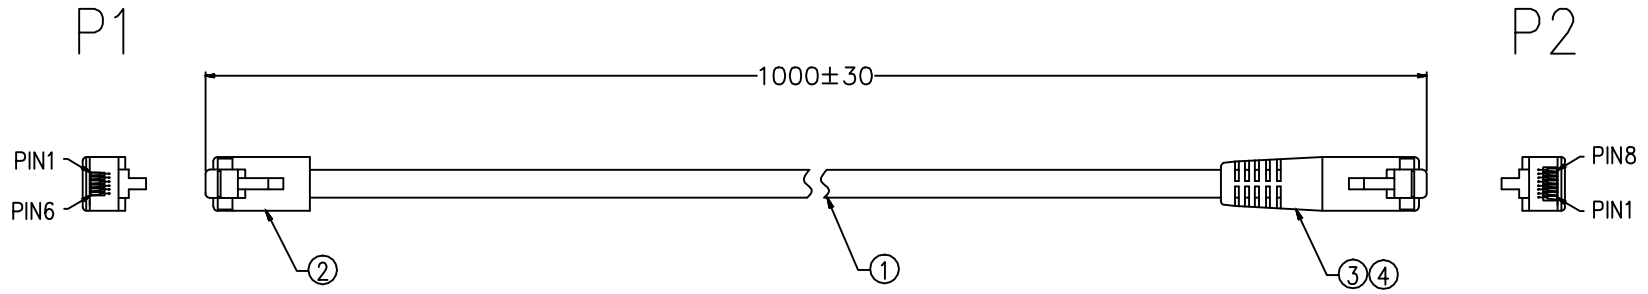

- Electrical
1. Withstanding Voltage:DC 300V
 2. Conduction impedance:1Ω (MAX)
 3. Insulation Resistance:10MΩ (MIN)

- Packing specification
1. 1pcs/Bundle, 1pcs/Bag

PIN ASSIGNMENT

P1	P2
PIN1 <u>White/Blue</u>	PIN4
PIN3 <u>Blue</u>	PIN3
PIN4 <u>White/Brown</u>	PIN2
PIN5 <u>Brown</u>	PIN6
PIN2	PIN5
PIN6	PIN1
	PIN7
	PIN8

* Note: All Materials Meet The "RoHs" !

NO.	Specification
4	Molded: PVC 45P Black
3	RJ45 8P8C Modular Plug, Gold Plated On Contacts
2	RJ11 6P6C Modular Plug, Gold Plated On Contacts
1	Network Cable: 2Twisted Pairs 24AWG+Al mylar,Jacket Black

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X.±5'	FRANK	21/NOV/17	FCW009-000016	FCW009	
	X.X±.008(0.20)	.X'±2'	CHECKED BY	DATE	TITLE		
	X.XX±.006(0.15)	.XX'±1'	CHERRY	21/NOV/17	NETWORK CABLE		
SCALE	SIZE	X.XXX±.004(0.10)	.XXX'±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4			DANIEL	21/NOV/17	REV 0	SHEET NO. 1/1