


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

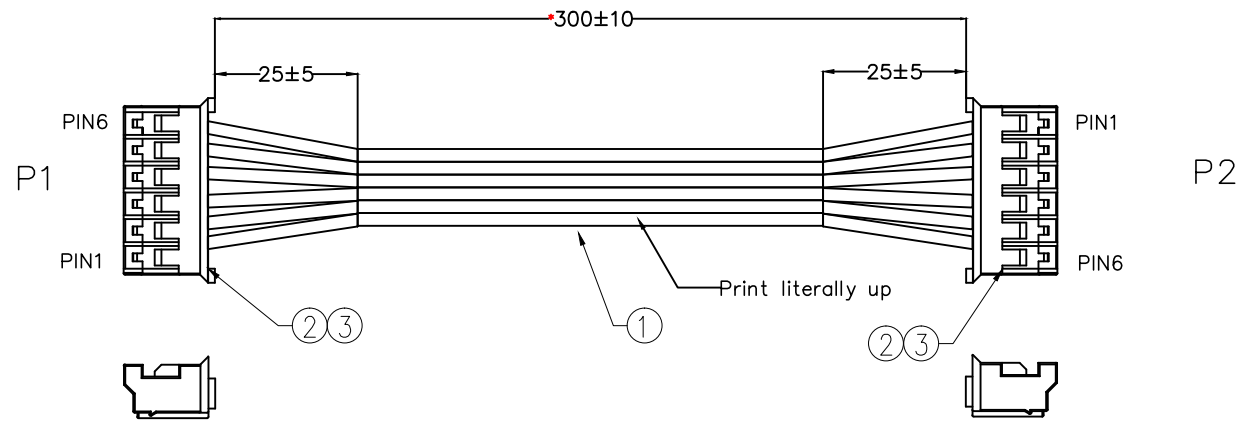

PIN ASSIGNMENT

P1		P2	
PIN1	—————	PIN6	
PIN2	—————	PIN5	
PIN3	—————	PIN4	
PIN4	—————	PIN3	
PIN5	—————	PIN2	
PIN6	—————	PIN1	

Mechanical Performance
 1. Terminal/Housing Retention Force 15N(MIN)
 2. Crimping pull out force: 35N(MIN)

Electrical
 1. Withstanding Voltage: DC 300V
 2. Conduction impedance: 3Ω (MAX)
 3. Insulation Resistance: 10MΩ (MIN)
 Packing specification
 25pcs/Bundle, 200pcs/Bag
 "*" as the key size control

* Note: All Materials Meet The "RoHs" !

3	Wire to board terminal 2mm Female(Tin-Plated) T20001-F2H
2	Wire to board housing 2mm 6Circuits HG20001-S06M2W1B
1	UL2468 26AWG(7/0.16TS) 6C Flat Cable RED White
NO.	Specification

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry	
	X. ±0.30	X.' ±5'	PACO	31/JUL/18	FCW014-000020	FCW014		
	DESIGN UNITS Metric	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		
	SCALE	SIZE	X.XX ±0.15	X.XX' ±1'	CHERRY	31/JUL/18		Flat Cable
5:1	A4	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	ANDY	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			ANDY	31/JUL/18		REV 0	SHEET NO. 1/1	