

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A A


B B

C C

D D

E E

F F

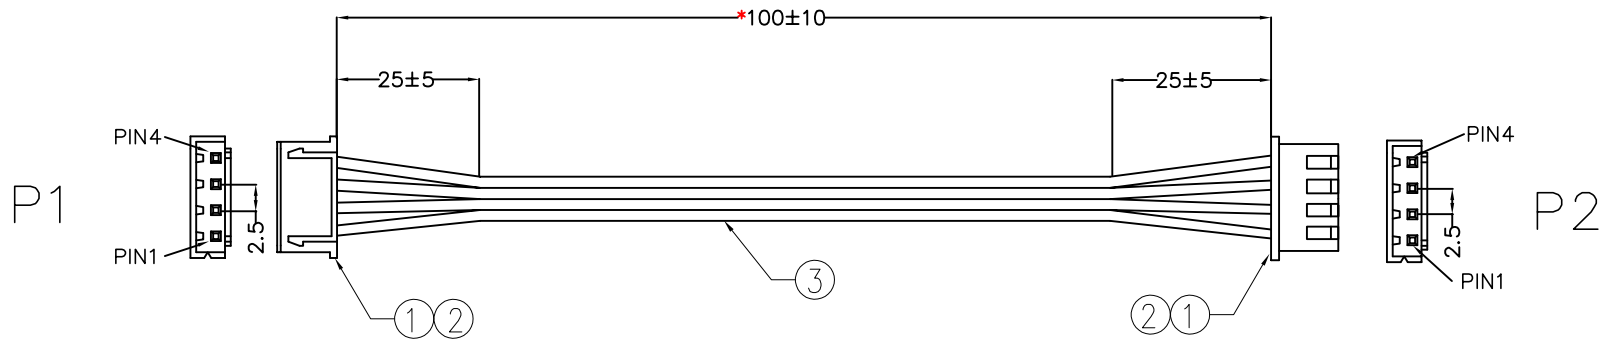

PIN ASSIGNMENT

P1	P2
PIN1 — RED	PIN1
PIN2 — ORANGE	PIN2
PIN3 — YELLOW	PIN3
PIN4 — GREEN	PIN4

Electrical

1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

Packing specification

50pcs/Bundle, 250pcs/Bag

"*" as the key size control

* Note: All Materials Meet The "RoHs" !

NO.	Specification
3	UL1007 26AWG(7/0.16TS) 4C Flat Cable Red/Orange/Yellow/Green
2	Wire to board terminal 2.5mm Female(Tin-Plated) T25001-F2H
1	Wire to board housing 2.5mm 4Circuits HG25001-S04M2W1B

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Leader Of Industry</p>	
	X. ±0.30	X.' ±5'	FRANK	12/AUG/19	FCW014-000070	FCW014		
	DESIGN UNITS Metric	XX ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		REV 0 SHEET NO. 1/1
	SCALE 5:1 SIZE A4	X.XX ±0.15	X.XX' ±1'	CHERRY	12/AUG/19	Flat Cable Assemblies		
	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
			ZOEY	12/AUG/19				

1 2 3 4 5 6 7 8