


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

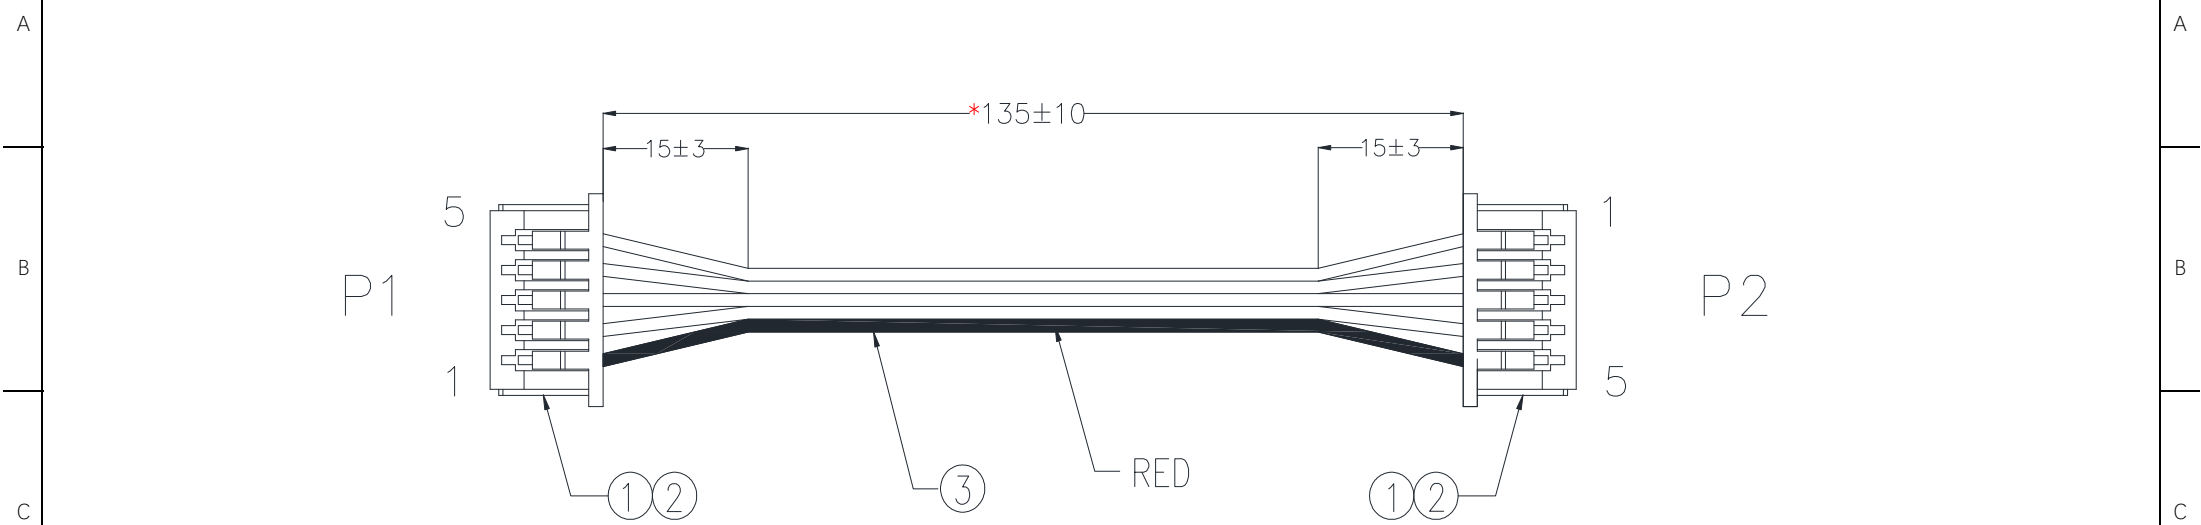

P1	P2
5	1
4	2
3	3
2	4
1	5

**ELECTRICAL**

- Withstanding Voltage: DC 300V
- Conduction impedance:  $3\Omega$  (MAX)
- Insulation Resistance:  $10M\Omega$  (MIN)

**PACKING SPECIFICATION**

- 50pcs/Bundle,200pcs/Bag
- "\*"as the key size control

**NOTES**

- This product must meet UL486A-1991mechanical performance.
- This product must meet 2011/65/EU ROHS compliance.
- Cable assembly to be tested 100% for continuity and polarity.

3	UL2651 #28 5C Pitch:1.0 Grey 2651-28-05G101-UL
2	Pitch 1.25mm Terminal:T12501-F2H
1	Pitch 1.25mm Housing:HG12502-S05M2W1B
NO.	SPECIFICATION

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
DESIGN UNITS Metric		X.±0.30	X.°±5°	FRANK	30/MAR/21	FCW014-000088	FCW014	
SCALE      SIZE 5:1          A4		X.XX±0.20	X.X°±2°	CHECKED BY	DATE	TITLE		
		X.XXX±0.15	X.XX°±1°	CHERRY	30/MAR/21	Flat Cable Assemblies		REV 0
		X.XXX±0.10	X.XXX°±0.5°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1/1
				JOE	30/MAR/21			