


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

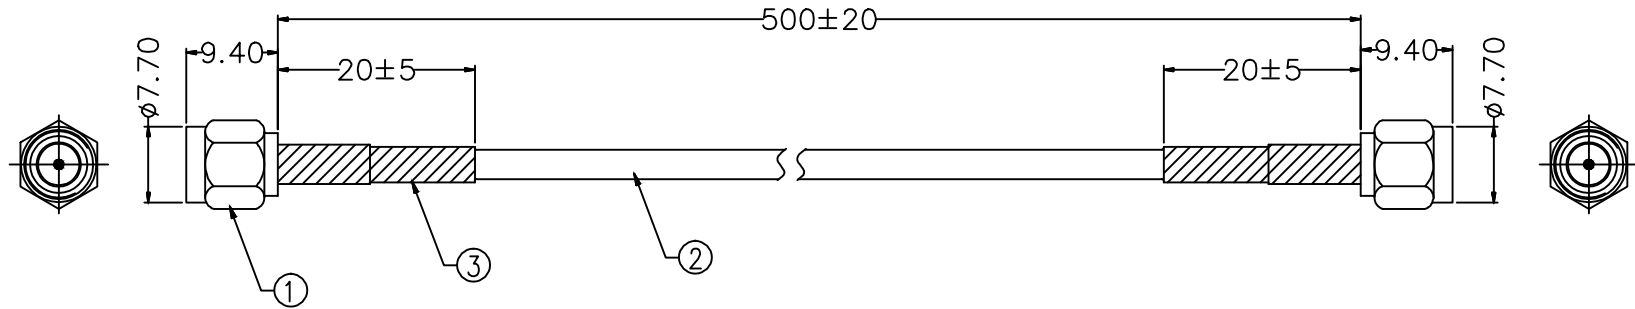

Electrical

1. Withstanding Voltage:DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance:10MΩ (MIN)

Packing specification

1. 1pcs/Bundle, 100pcs/Bag,

* Note: All Materials Meet The "RoHs" !

3	Black Heat Shrink Tube ϕ 3.5mm: R-4HA-12
2	Coaxial Cable: RG-316 BLUE
1	SMA CONNECTOR MALE, GOLD PLATED
NO.	Specification

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 13/JUL/15	PART NO. FCW018-000003	ITEM NO. FCW018	 Leader Of Industry
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 13/JUL/15	TITLE RF CABLE		
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	DRAWN BY KATE	DATE 13/JUL/15	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1"				
		X.XXX±.004(0.10)	.XXX'±0.5'				