
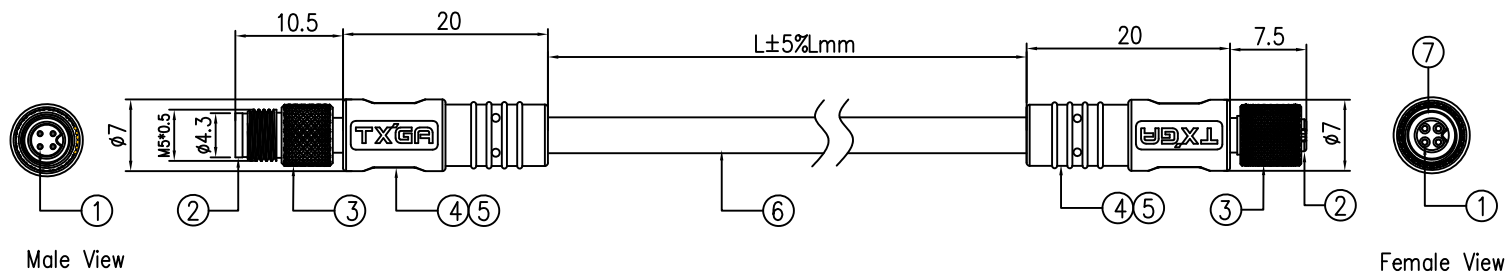


1	2	3	4
Coding	3WAY	4WAY	3WAY 4WAY
A-Coded			
WIRING CHART	1 BROWN	1 BROWN	
		2 WHITE	
	3 BLUE	3 BLUE	
	4 BLACK	4 BLACK	

Rated voltage	60V AC/DC
Rated current	1A
Temperature range	-40-105°C
IP	IP68

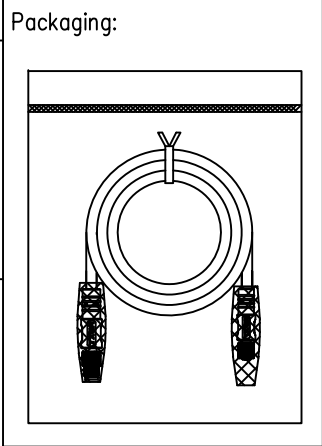

Order Information

FCZOM5 — $\frac{A}{2}$ $\frac{XX}{3}$ $\frac{XXX}{4}$ $\frac{0}{5}$ $\frac{0}{6}$ — $\frac{00}{7}$

1 Category	2 Coded	3 Circuits	4 Length	5 Shield	6 Rotation Angle	7 Serial code
FCZOM5-Double Straight head cable, Male, M5	A-A Coded	03-3Circuits 04-4Circuits	005-0.5M 010-1.0M 015-1.5M 020-2.0M ⋮	0-Without shield	0-0°	00-Standard Parts

TABLE 1

CABLE LENGTH (xxx)	005	010	015	020	025	030	035	040	045	100
L(M)	0.5M	1M	1.5M	2.0M	2.5M	3.0M	3.5M	4.0M	4.5M	10M

ELECTRICAL

- Withstanding Voltage: DC 300V
- Conduction impedance: 3Ω (MAX)
- Insulation Resistance: 10MΩ (MIN)

7	Waterproof O-ring: FKM, Black
6	UL2517 4C*26AWG, OD 4.0MM, PVC, Black
5	Outer Mold: PVC, 30P, Black
4	Inner Mold: PVC, 30P, Black
3	Shell: Brass Plated Ni
2	Housing: PA66, Black
1	Female/Male Pin: Brass Plated Gold
NO.	SPECIFICATION

 THIRD ANGLE PROJECTION DESIGN UNITS Metric SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 8/OCT/24	PART NO. FCZOM5-AXXXXX00-00	ITEM NO. M5	 Building Technology Cornerstone
	X. ±0.30	X.' ±5'	CHECKED BY CHERRY	DATE 8/OCT/24	M5X0.5 CABLE STRAIGHT FEMALE TO STRAIGHT MALE		
	X.XX ±0.15	X.XX' ±1'	DRAWN BY LIN	DATE 8/OCT/24	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	X.XXX ±0.10	X.XXX' ±0.5'					