





REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Tolerances change	07/JUL/20	KATE	CHERRY

Electrical

Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

Material and Plating

Housing: LCP(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Gold Plated/Selective gold in contact area, tin on tail

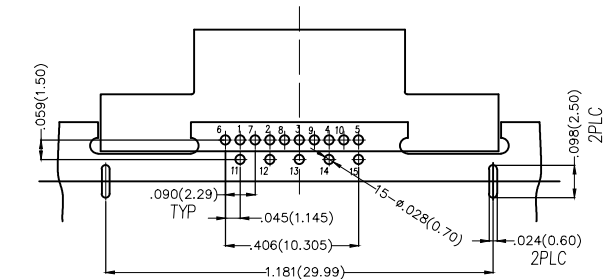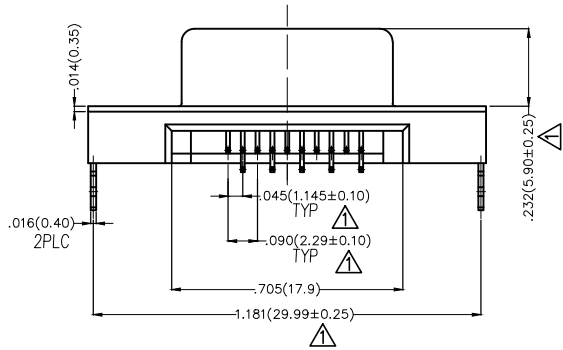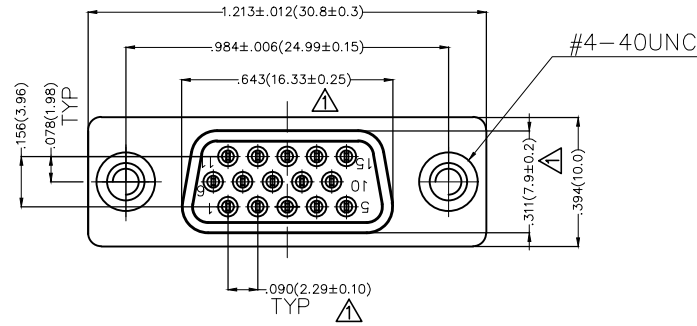

Recommended P.C.Board Layout
D-SUB BOTTOM VIEW

Ordering Information

FDB 15 29 - F0 D B X XX XX L
1 2 3 4 5 6 7 8 9 10

1	Category FDB-D-SUB Connectors	2	Circuits 15-15Circuits	3	Distinction No. 29	4	Type F0-Female	5	Assembly Layout D-DIP
6	Entry Type B-90° Angle	7	Plating 1-Gold Plated 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 00-Gold Flash 03-3μ" Custom plate available	9	Color-Resin K6-Black U1-Blue	10	Packaging L-PE Pipe

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 25/JUN/13	PART NO. FDB1529-F0DBXXXXXL	ITEM NO. FDB1529	 Leader Of Industry	
	DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.'±5'	CHECKED BY JACOB	DATE 25/JUN/13	TITLE D-SUB Connectors 15 Circuits 90° Angled Female		REV 1
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1"	DRAWN BY CHERRY	DATE 25/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		