

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Size changes	20/APR/22	MATT	CHERRY
2		Add marking code	13/Jan/25	NICK	LEO


SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

Material and plating

Housing: PBT UL 94V-0
Contact: Copper Alloy/
Selective gold on contact area, tin on tail
Shell: SPCC/ Nickel Plated

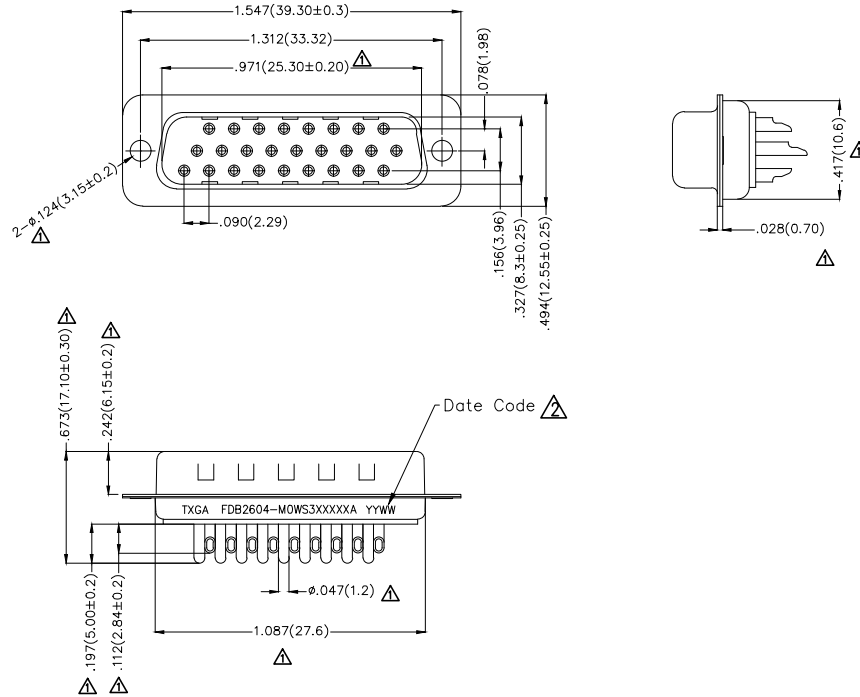

Ordering Information

FDB 26 04 — M0 W S 3 XX XX X A
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB- D-SUB Connector	2	Circuits 26-26 Circuits	3	Distinction No. 04	4	Type M0-Male	5	Assembly Layout W-Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3-Selective gold on contact area, tin on tail	8	Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9	Color-Resin K6-Black U1-Blue	10	Packaging K-Tray L-Tube	11	Distinction Type A-A Type		




 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2604-MOWS3XXXXXX	ITEM NO. FDB2604	 Leader Of Industry
	DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.±5°	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male	
	SCALE 5:1	X.X±.008(0.20)	.X'±2°	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	SIZE A4	X.XX±.006(0.15)	.XX'±1°			REV 2	
		X.XXX±.004(0.10)	.XXX'±0.5°			SHEET NO. 1/1	

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Add marking code	13/Jan/25	NICK	LEO

SPECIFICATIONS

Electrical
Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

Material and plating
Housing: PBT UL 94V-0
Contact: Copper Alloy/
Selective gold in contact area, tin on tail
Shell: SPCC/ Nickel Plated
Screws: Copper Alloy/ Nickel Plated

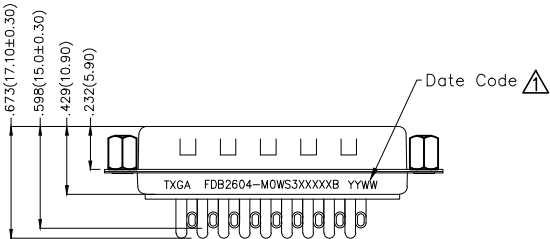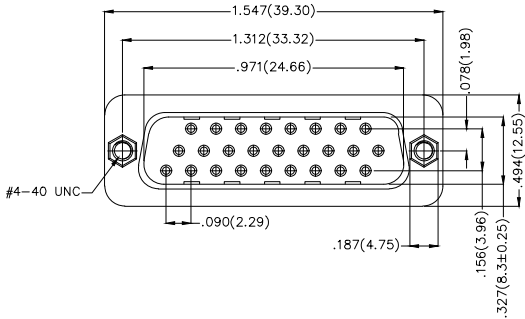

Ordering Information

FDB 26 04 — M0 W S 3 XX XX X B
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB- D-SUB Connector	2	Circuits 26-26 Circuits	3	Distinction No. 04	4	Type M0—Male	5	Assembly Layout W—Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold Flash 03—3μ" Custom Plate Available	9	Color—Resin K6—Black U1—Blue	10	Packaging K—Tray L—Tube	11	Distinction Type B—B Type		

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2604-MOWS3XXXXXB	ITEM NO. FDB2604	 Leader Of Industry	
				CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male			
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5°	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 1	SHEET NO. 1/1
SCALE 5:1		X.XX±.006(0.15)	.XX'±1°						
SIZE A4		X.XXX±.004(0.10)	.XXX'±0.5°						

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Add marking code	13/Jan/25	NICK	LEO




SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

Material and plating

Housing: PBT UL 94V-0
Contact: Copper Alloy/
Selective gold in contact area, tin on tail
Shell: SPCC/ Nickel Plated
Screws: Copper Alloy/ Nickel Plated

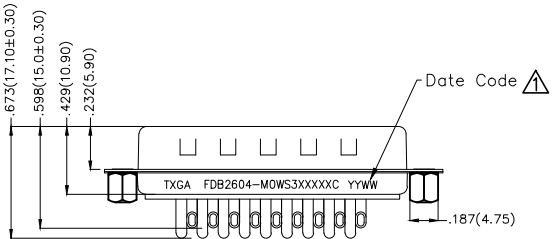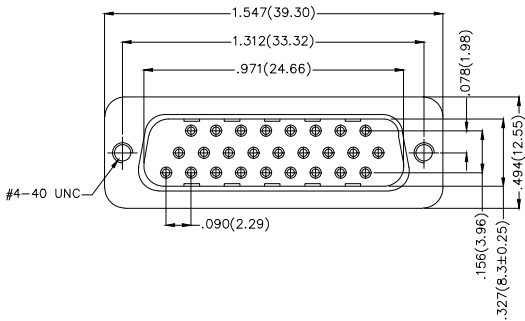

Ordering Information

FDB 26 04 — M0 W S 3 XX XX X C
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB- D-SUB Connector	2	Circuits 26-26 Circuits	3	Distinction No. 04	4	Type M0-Male	5	Assembly Layout W-Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 00-Gold Flash 03-3μ" Custom Plate Available	9	Color-Resin K6-Black U1-Blue	10	Packaging K-Tray L-Tube	11	Distinction Type C-C Type		

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2604-MOWS3XXXXXC	ITEM NO. FDB2604	 Leader Of Industry	
		X±.012(0.30)	X'±5°	CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male	REV 1		
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X'±2°	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1°						
		X.XXX±.004(0.10)	.XXX'±0.5°						

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Add marking code	13/Jan/25	NICK	LEO




SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

Material and plating

Housing: PBT UL 94V-0
Contact: Copper Alloy/
Selective gold in contact area, tin on tail
Shell: SPCC/ Nickel Plated
Screws: Copper Alloy/ Nickel Plated

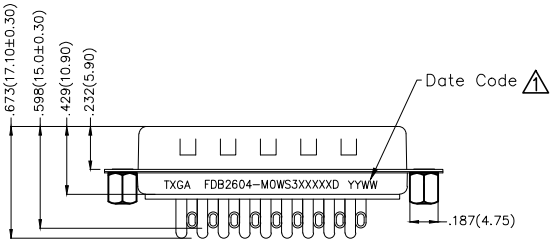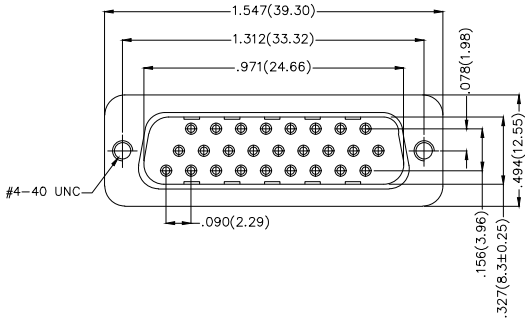

Ordering Information

FDB 26 04 — M0 W S 3 XX XX X D
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB- D-SUB Connector	2	Circuits 26-26 Circuits	3	Distinction No. 04	4	Type M0—Male	5	Assembly Layout W—Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold Flash 03—3μ" Custom Plate Available	9	Color—Resin K6—Black U1—Blue	10	Packaging K—Tray L—Tube	11	Distinction Type D—D Type		

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2604-MOWS3XXXXXD	ITEM NO. FDB2604	 Leader Of Industry	
				CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male			
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5°	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 1	SHEET NO. 1/1
SCALE 5:1		X.XX±.006(0.15)	.XX'±1°						
SIZE A4		X.XXX±.004(0.10)	.XXX'±0.5°						

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Add marking code	13/Jan/25	NICK	LEO




SPECIFICATIONS

Electrical

Current Rating: 3A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 25 mΩ Max
Insulation Resistance: 1000 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -55°C~+105°C

Material and plating

Housing: PBT UL 94V-0
Contact: Copper Alloy/
Selective gold in contact area, tin on tail
Shell: SPCC/ Nickel Plated
Screws: Copper Alloy/ Nickel Plated

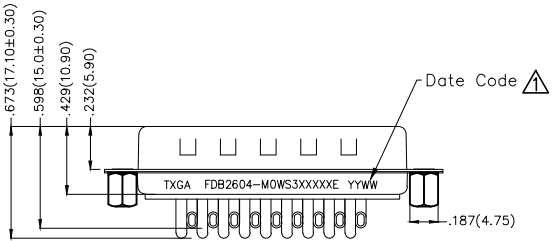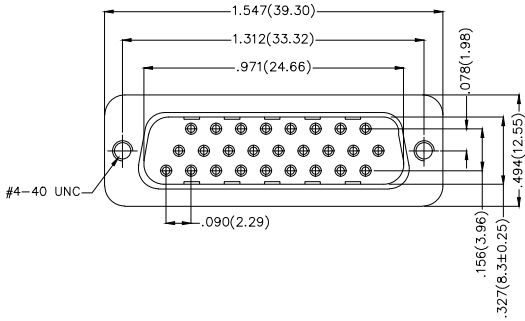

Ordering Information

FDB 26 04 — M0 W S 3 XX XX X E
1 2 3 4 5 6 7 8 9 10 11

1	Category FDB- D-SUB Connector	2	Circuits 26-26 Circuits	3	Distinction No. 04	4	Type M0—Male	5	Assembly Layout W—Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold Flash 03—3μ" Custom Plate Available	9	Color—Resin K6—Black U1—Blue	10	Packaging K—Tray L—Tube	11	Distinction Type E—E Type		

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDB2604-MOWS3XXXXXE	ITEM NO. FDB2604	 Leader Of Industry	
				CHECKED BY JACOB	DATE 28/JUN/13	TITLE D-SUB connector 26 Circuits 180° Vertical Male			
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X'±5"	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
X.X±.008(0.20)		.X'±2"							
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1"					REV 1	SHEET NO. 1/1
		X.XXX±.004(0.10)	.XXX'±0.5"						