
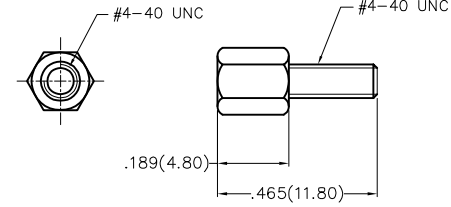
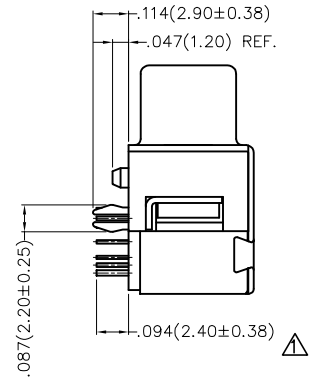
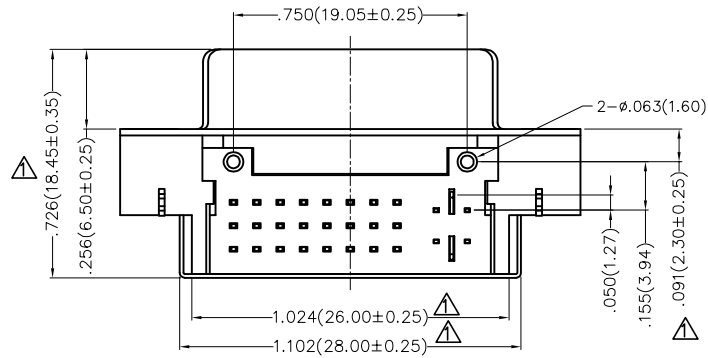



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Size ,Material & plating changes	08/JUN/22	MATT	CHERRY

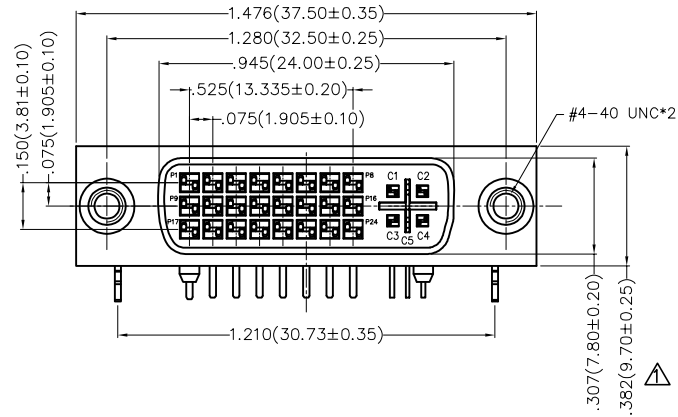


Ordering Information

FDI 24 08 - FO D B 3 XX W1 K
 1 2 3 4 5 6 7 8 9 10




1	Category FDI-DVI	2	Circuits 24	3	Distinction No. 08	4	Type FO-Female	5	Assembly Layout D-DIP	6	Entry Angle B-90° Angle
7	Plating 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 01-1µ" 03-3µ" Custom plate available	9	Color-Resin W1-White	10	Packaging K-Tray				

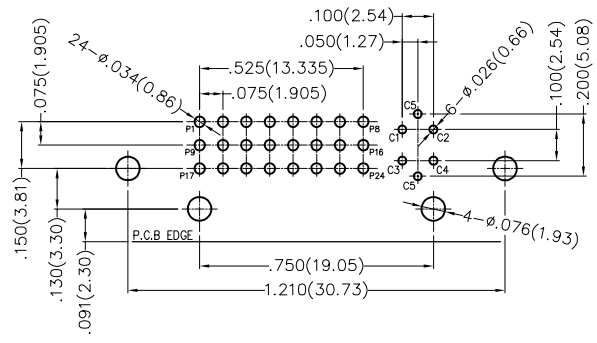

Recommended P.C.Board Layout

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDI2408-F0DB3XXW1K	ITEM NO. FDI2408	 Leader Of Industry
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X'±5' .X'±2' .XX'±1' .XXX'±0.5'	CHECKED BY JACOB	DATE 28/JUN/13	TITLE DVI Female (24+5) 90° Angle(DIP)	
SCALE 5:1	SIZE A4	DRAWN BY CHERRY		DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Size ,Material & plating changes	08/JUN/22	MATT	CHERRY

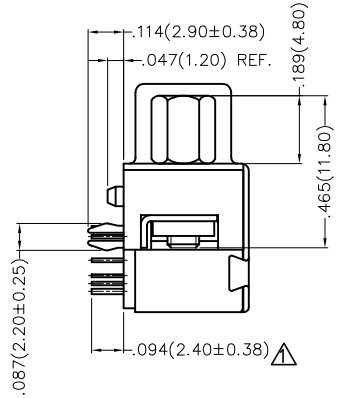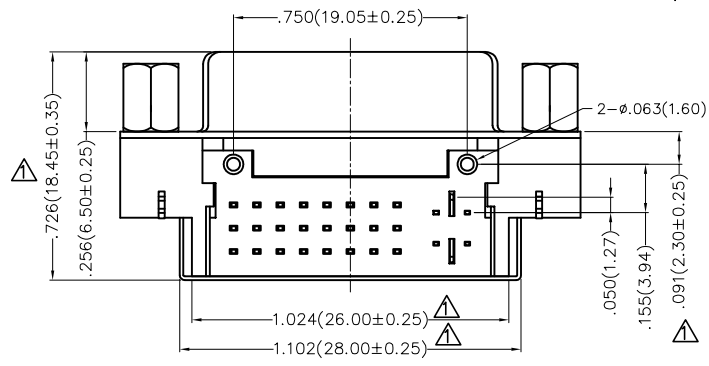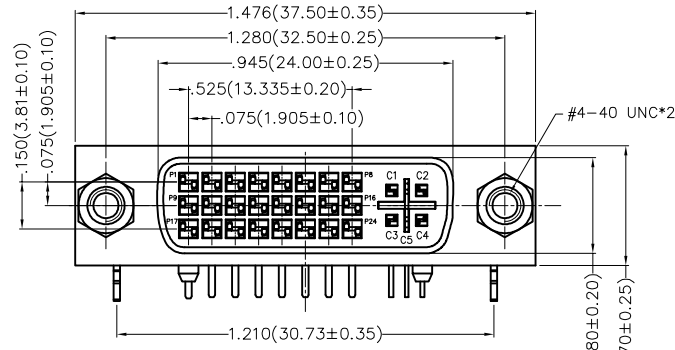

SPECIFICATIONS

Electrical

- Current Rating: 1.5A AC(rms)/DC
- Voltage Rating: 250V AC(rms)/DC
- Contact Resistance: 30 mΩ Max
- Insulation Resistance: 1000 MΩ Min
- Withstanding Voltage: 500V AC r.m.s
- Temperature Range-Operating: -20°C~+85°C


Material and Finish

- Housing: PA66 (UL 94V-0) Color: White△
- Cover: PA66 (UL 94V-0) Color: White
- Contact: Brass/ Selective gold on contact area, tin on tail
- Shell: SPCC/ Nickel Plated
- Board Lock: SPCC/ Nickel Plated △
- Rivet: Copper Alloy/ Nickel Plated
- Shield: SPCC/ Nickel Plated △
- Screw: SPCC/ Nickel Plated


Ordering Information

FDI 24 08 - FO D B 3 XX W1 K A
 1 2 3 4 5 6 7 8 9 10 11

1	Category FDI-DVI	2	Circuits 24	3	Distinction No. 08	4	Type FO-Female	5	Assembly Layout D-DIP	6	Entry Angle B-90° Angle
7	Plating 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 01-1μ" 03-3μ" Custom plate available	9	Color-Resin W1-White	10	Packaging K-Tray	11	Distinction Type A-Type A		

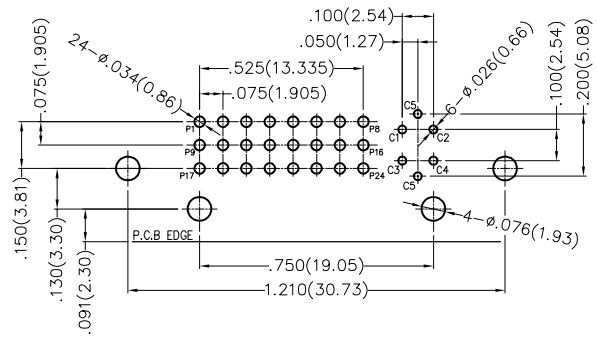

Recommended P.C.Board Layout

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 28/JUN/13	PART NO. FDI2408-F0DB3XXW1KA	ITEM NO. FDI2408	 Leader Of Industry	
	X.±.012(0.30)	X'±5'	CHECKED BY JACOB	DATE 28/JUN/13	TITLE DVI Female (24+5) 90° Angle(DIP)			
DESIGN UNITS Inch (metric)	X.XX±.008(0.20)	.X'±2'	DRAWN BY CHERRY	DATE 28/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 1	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX±.006(0.15)						