
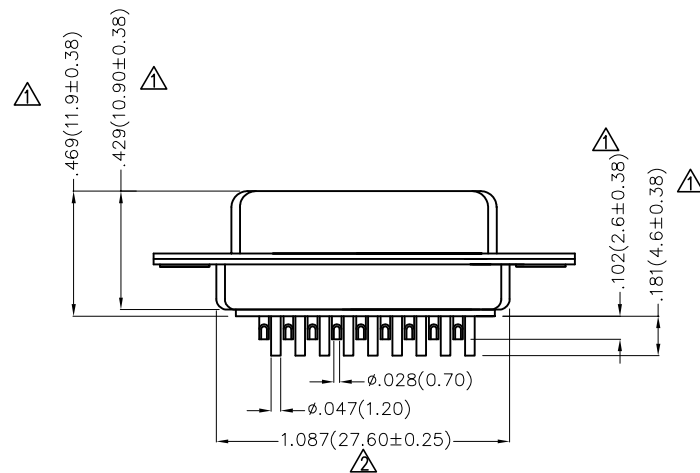
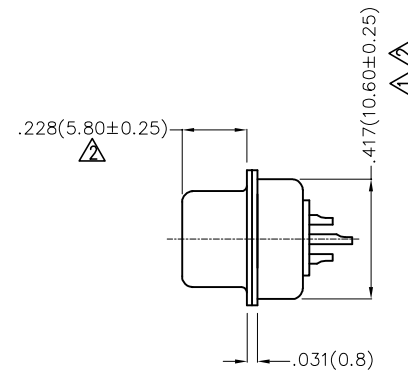


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Dimensions and tolerances change	25/APR/22	MATT	CHERRY
2		Dimensions change	23/AUG/23	MATT	CHERRY

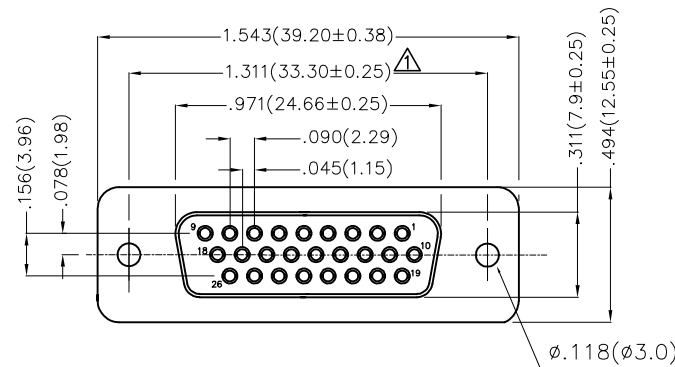

Ordering Information

FDM 26 11 — F0 W S 1 XX XX X
1 2 3 4 5 6 7 8 9 10

1 Category FDM—Machined pin D—SUB connector	2 Circuits 26	3 Distinction No. 11	4 Type F0—Female	5 Assembly Layout W—Welding Type
6 Entry Angle S—180° Vertical	7 Plating 1—Gold Plated	8 Thickness of Plating 01—1μ" 03—3μ" Custom plate available	9 Color—Resin W1—White K6—Black	10 Packaging K—Tray L—Tube

SPECIFICATION

Material and Plating

Insulator: PBT +30% G.F (UL94V-0)

Contact: Brass/ Gold plated

Shell: SPCC/ Front Nickel plated, Back Tin plated

Electrical

Current Rating: 5A

Voltage Rating: 300V

Contact resistance: 30mΩ Max

Insulation resistance: 5000MΩ Min. at 500V DC

Dielectric Withstanding Voltage :1000V AC r.m.s Min

Temperature Range—Operating: -55°C ~ +105°C

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 23/JUL/13	PART NO. FDM2611-FOWS1XXXXX	ITEM NO. FDM2611-F0	 Building Technology Cornerstone	
		X.±.012(0.30)	X.±5°	CHECKED BY	DATE	TITLE Machined pin D-SUB connector 180° Vertical Female			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X'±2"	CHERRY	23/JUL/13			REV 2	
		X.XX±.006(0.15)	.XX'±1"	DRAWN BY	DATE				
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5°	JACOB	23/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

REV 2 SHEET NO. 1/1

A

B

C

D

E

F

1

2

3

4




5

6

7

8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

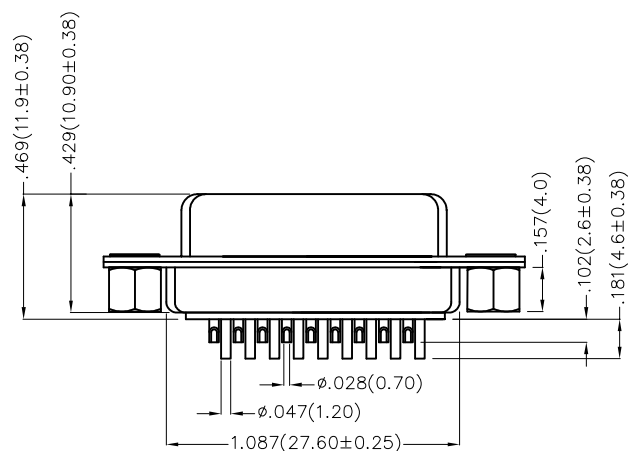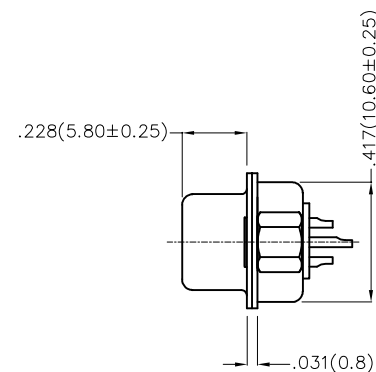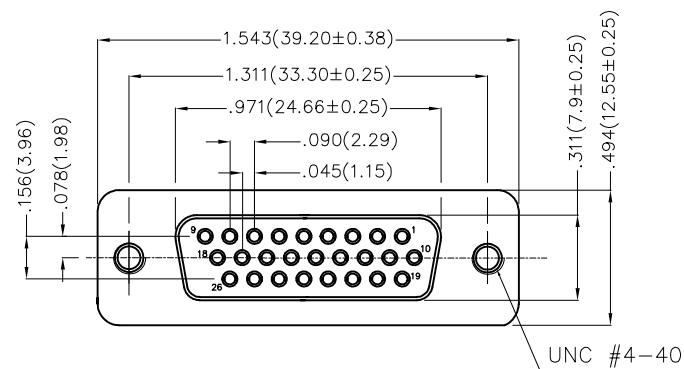

Ordering Information

FDM	26	11	—	F0	W	S	1	XX	XX	X	B
1	2	3		4	5	6	7	8	9	10	11

1	Category	2	Circuits	3	Distinction No.	4	Type	5	Assembly Layout		
	FDM—Machined pin D—SUB connector		26		11		F0—Female		W—Welding Type		
6	Entry Angle	7	Plating	8	Thickness of Plating	9	Color—Resin	10	Packaging	11	Type
	S—180° Vertical		1—Gold Plated		01—1μ" 03—3μ" Custom plate available		W1—White K6—Black		K—Tray L—Tube		B—B type

SPECIFICATION

Material and Plating

Insulator: PBT +30% G.F (UL94V-0)

Contact: Brass/ Gold plated

Shell: SPCC/ Front Nickel plated, Back Tin plated

Electrical

Current Rating: 5A

Voltage Rating: 300V

Contact resistance: 30mΩ Max

Insulation resistance: 5000MΩ Min. at 500V DC

Dielectric Withstanding Voltage :1000V AC r.m.s Min

Temperature Range—Operating: -55°C ~ +105°C

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 08/NOV/23	PART NO. FDM2611-F0WS1XXXXXB	ITEM NO. FDM2611-F0	 Building Technology Cornerstone			
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.±5°	CHECKED BY	DATE	TITLE Machined pin D-SUB connector 180° Vertical Female		REV 0		SHEET NO. 1/1	
		X.X±.008(0.20)	X.±2°	CHERRY	08/NOV/23						
		SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX°±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX±.004(0.10)	.XXX±0.5°	MATT	08/NOV/23						