
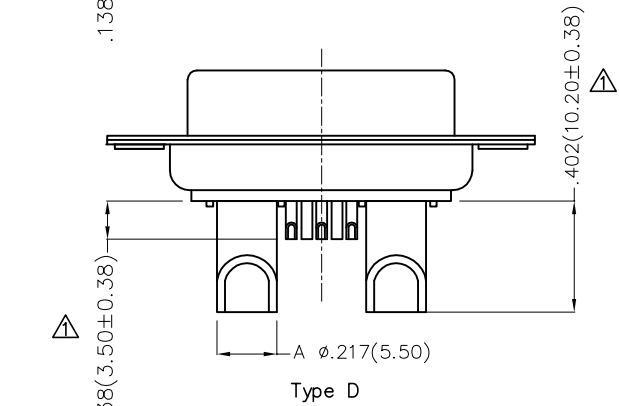

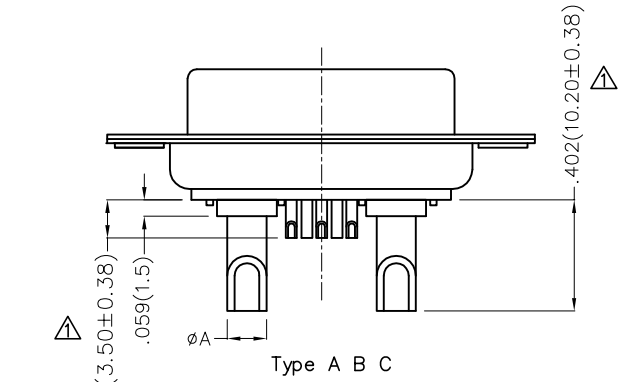
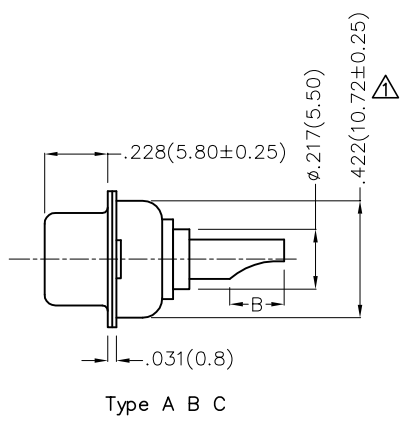


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Change the structure and size	24/JUL/24	MATT	LEO

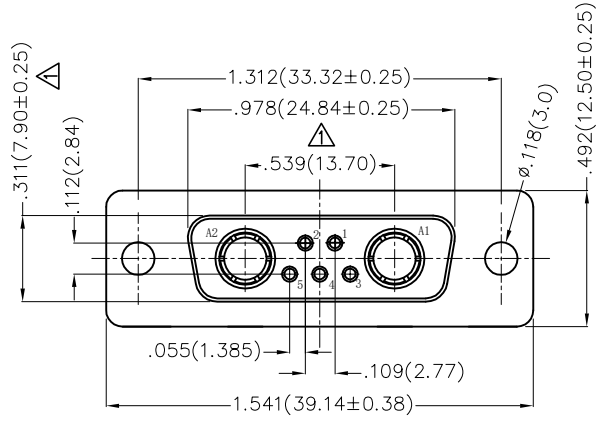

SPECIFICATIONS

Electrical Characteristic
 Current Rating:
 Signal contacts: 5A
 Power contacts: 10 to 40A
 Voltage Rating: 300V
 Contact Resistance: 5mΩ Max.
 Insulation Resistance: 5000 MΩ Min.
 Dielectric Withstanding Voltage: 1000V AC r.m.s Min.
 Temperature Range-Operating: -55°C ~ +105°C

Material and plating
 Shell: Steel, Nickel Plated 80μ" Min
 Back Shell: Steel, Tin Plated 100μ" Min
 Insulator: Glass Filled Thermoplastic (UL 94V-0)
 Signal contacts: Brass/ Gold Plated
 Power Contacts: Brass/ Gold Plated

Type	Part NO.	A	B	Wire	Current Rating(A)
A	FDP0701-FOWS1XXK6KA	φ.098(2.50)	.177(4.50)	14#~16#	10
B	FDP0701-FOWS1XXK6KB	φ.142(3.60)	.197(5.00)	10#~12#	20
C	FDP0701-FOWS1XXK6KC	φ.173(4.40)	.217(5.50)	8#~10#	30
D	FDP0701-FOWS1XXK6KD	φ.217(5.50)	.217(5.50)	6#~8#	40

Ordering Information

FDP 07 01 — F0 W S 1 XX K6 K X
 1 2 3 4 5 6 7 8 9 10 11

1 Category FDP-Hight current D-SUB connector	2 Circuits 07-7W2	3 Distinction No. 01	4 Type FO-Female	5 Assembly Layout W-Welding Type
6 Entry Angle S-180° Vertical	7 Plating 1-Gold Plated	8 Thickness of Plating 03-3μ" 15-15μ" Custom Plate Available	9 Color-Resin K6-Black	10 Packaging K-Tray
				11 Distinction Type A-Type A B-Type B C-Type C D-Type D

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/JUL/13	PART NO. FDP0701-FOWS1XXK6KX	ITEM NO. FDP0701-F	<p>Building Technology Cornerstone</p>	
	X.±.012(0.30)	X'±5'	CHECKED BY CHERRY	DATE 19/JUL/13	TITLE Hight current D-SUB connector 7W2 180° Vertical Female			REV 1 SHEET NO. 1/1
	DESIGN UNITS Inch (metric)	X.XX±.008(0.20)	.X'±2'	DRAWN BY JACOB	DATE 19/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SCALE 5:1	SIZE A4	X.XX±.006(0.15)					