







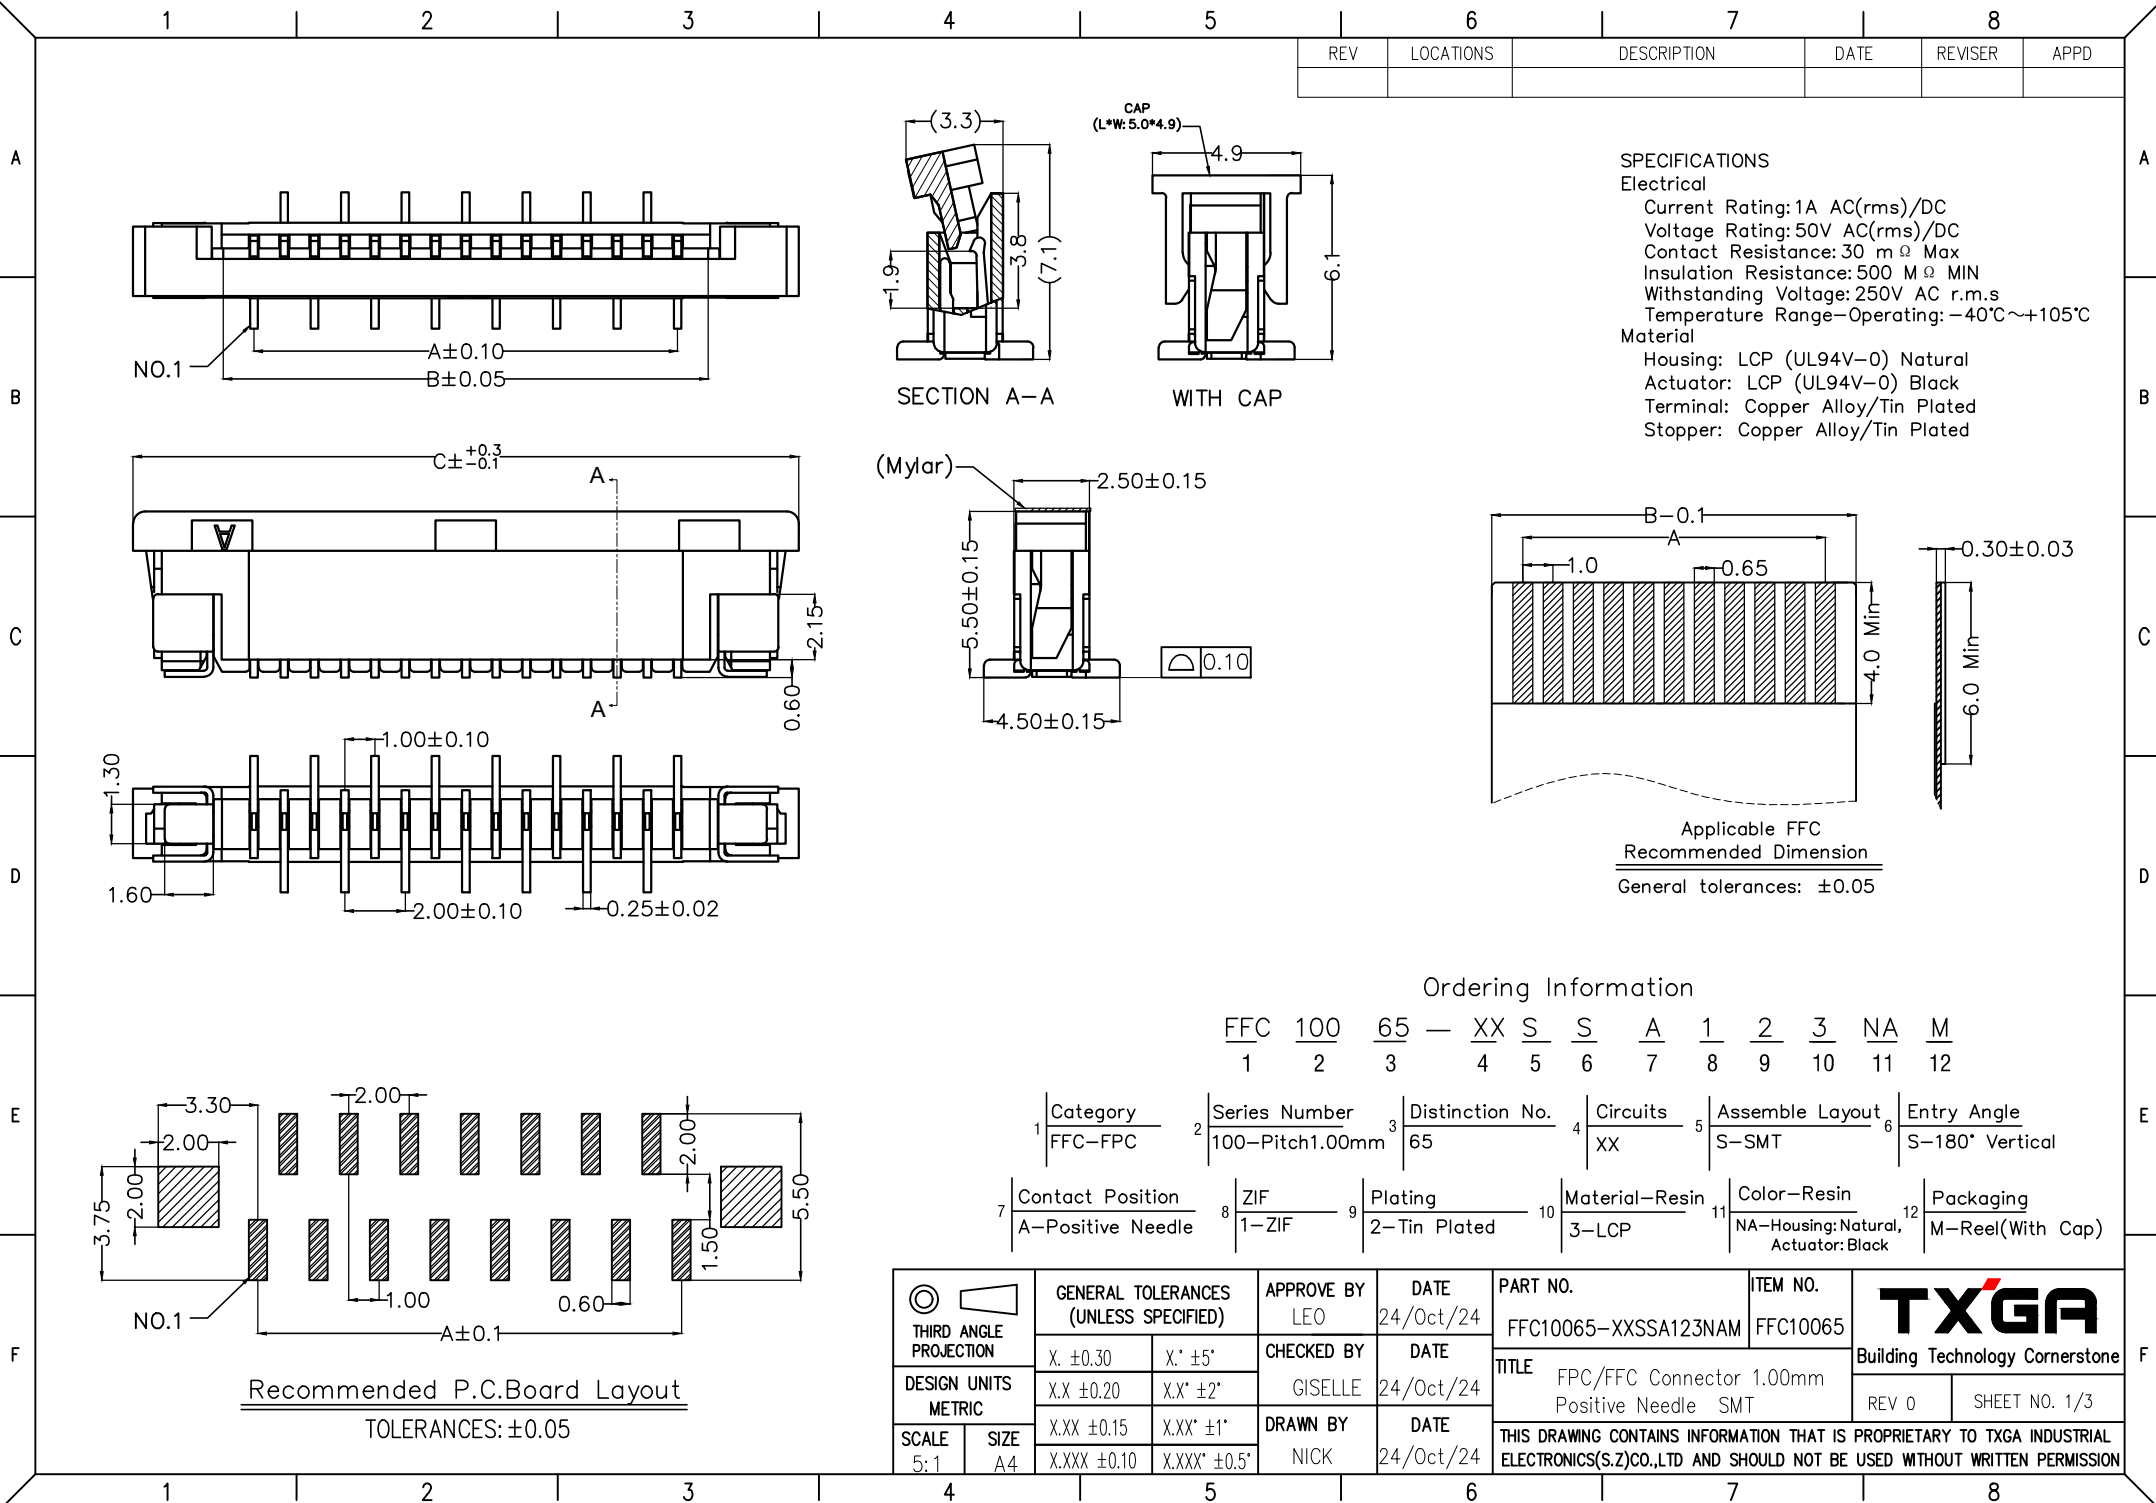


1					2					3					4					5					6					7					8				



1. 10 sprocket hole cumulative tolerance ± 0.2
2. Carrier camber is within 1.0mm in 250mm
3. Material: Black Conductive polystyrene Alloy 100% recyclable
4. All dimensions meet EIA-481-3 requirements
5. Peel off force of cover tape&carrier tape: 20g~130g(0.2N~1.3N)
6. Component load per 13" reel: 900 pcs

Circuits (n)	Dimensions(mm)			PCS/REL
	A	B	C	
4~7	24.00	11.50	—	900/10
8~14	32.00	14.20	28.40	900/8
15~27	44.00	20.20	40.40	900/6
28~36	56.00	26.20	52.40	900/5
40	72.00	34.20	68.40	900/4

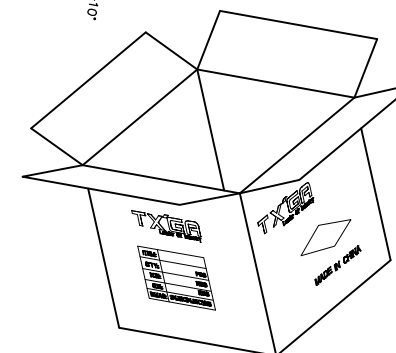

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 24/Oct/24	PART NO. FFC10065-XXSSA123NAM	ITEM NO. FFC10065	 Building Technology Cornerstone	
		X. ± 0.30	X.* $\pm 5^{\circ}$	CHECKED BY	DATE	TITLE FPC/FFC Connector 1.00mm Positive Needle SMT			
DESIGN UNITS METRIC		X.X ± 0.20	X.X* $\pm 2^{\circ}$	GISELLE	24/Oct/24				
		X.XX ± 0.15	X.XX* $\pm 1^{\circ}$	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX ± 0.10	X.XXX* $\pm 0.5^{\circ}$	NICK	24/Oct/24				