

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Structure and size changes	16/OCT/20	KATE	CHERRY

Electrical



Current Rating: 1A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 20 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -40°C~+85°C

Material and Plating

Housing: PA6T(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Gold Plated/Selective gold on contact area,
tin on tail

Packing: M—Reel(With Cap)

Packing: M1—Reel(With Mylar)




Ordering Information

FFH 127 17 — D XX S X XX 4 K6 XX
1 2 3 4 5 6 7 8 9 10 11

1 Category FFH—Female Header	2 Series Number 127—Pitch1.27mm	3 Distinction No. 17	4 Row Option D—Double Row	5 Circuits XX	6 Entry Angle S—180° Vertical
7 Plating 1—Gold Plated 3—Selective gold on contact area, tin on tail	8 Thickness of Plating 00—Gold Flash 05—5μ" Custom plate available	9 Material—Resin 4—PA6T	10 Color—Resin K6—Black	11 Packaging M—Reel(With Cap) M1—Reel(With Mylar)	

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 10/JUL/13	PART NO. FFH12717-DXXSXXX4K6XX	ITEM NO. FFH12717	 Leader Of Industry	
		X.±.012(0.30)	X.±5"	CHECKED BY	DATE	TITLE			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X'±2"	CHERRY	10/JUL/13	Board to Board (Female Header) Pitch 1.27mm 180° Vertical (SMT)		REV 1	SHEET NO. 1/2
		X.XX±.006(0.15)	.XX'±1"	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5"	JACOB	10/JUL/13				

Recommended P.C.Board Layout

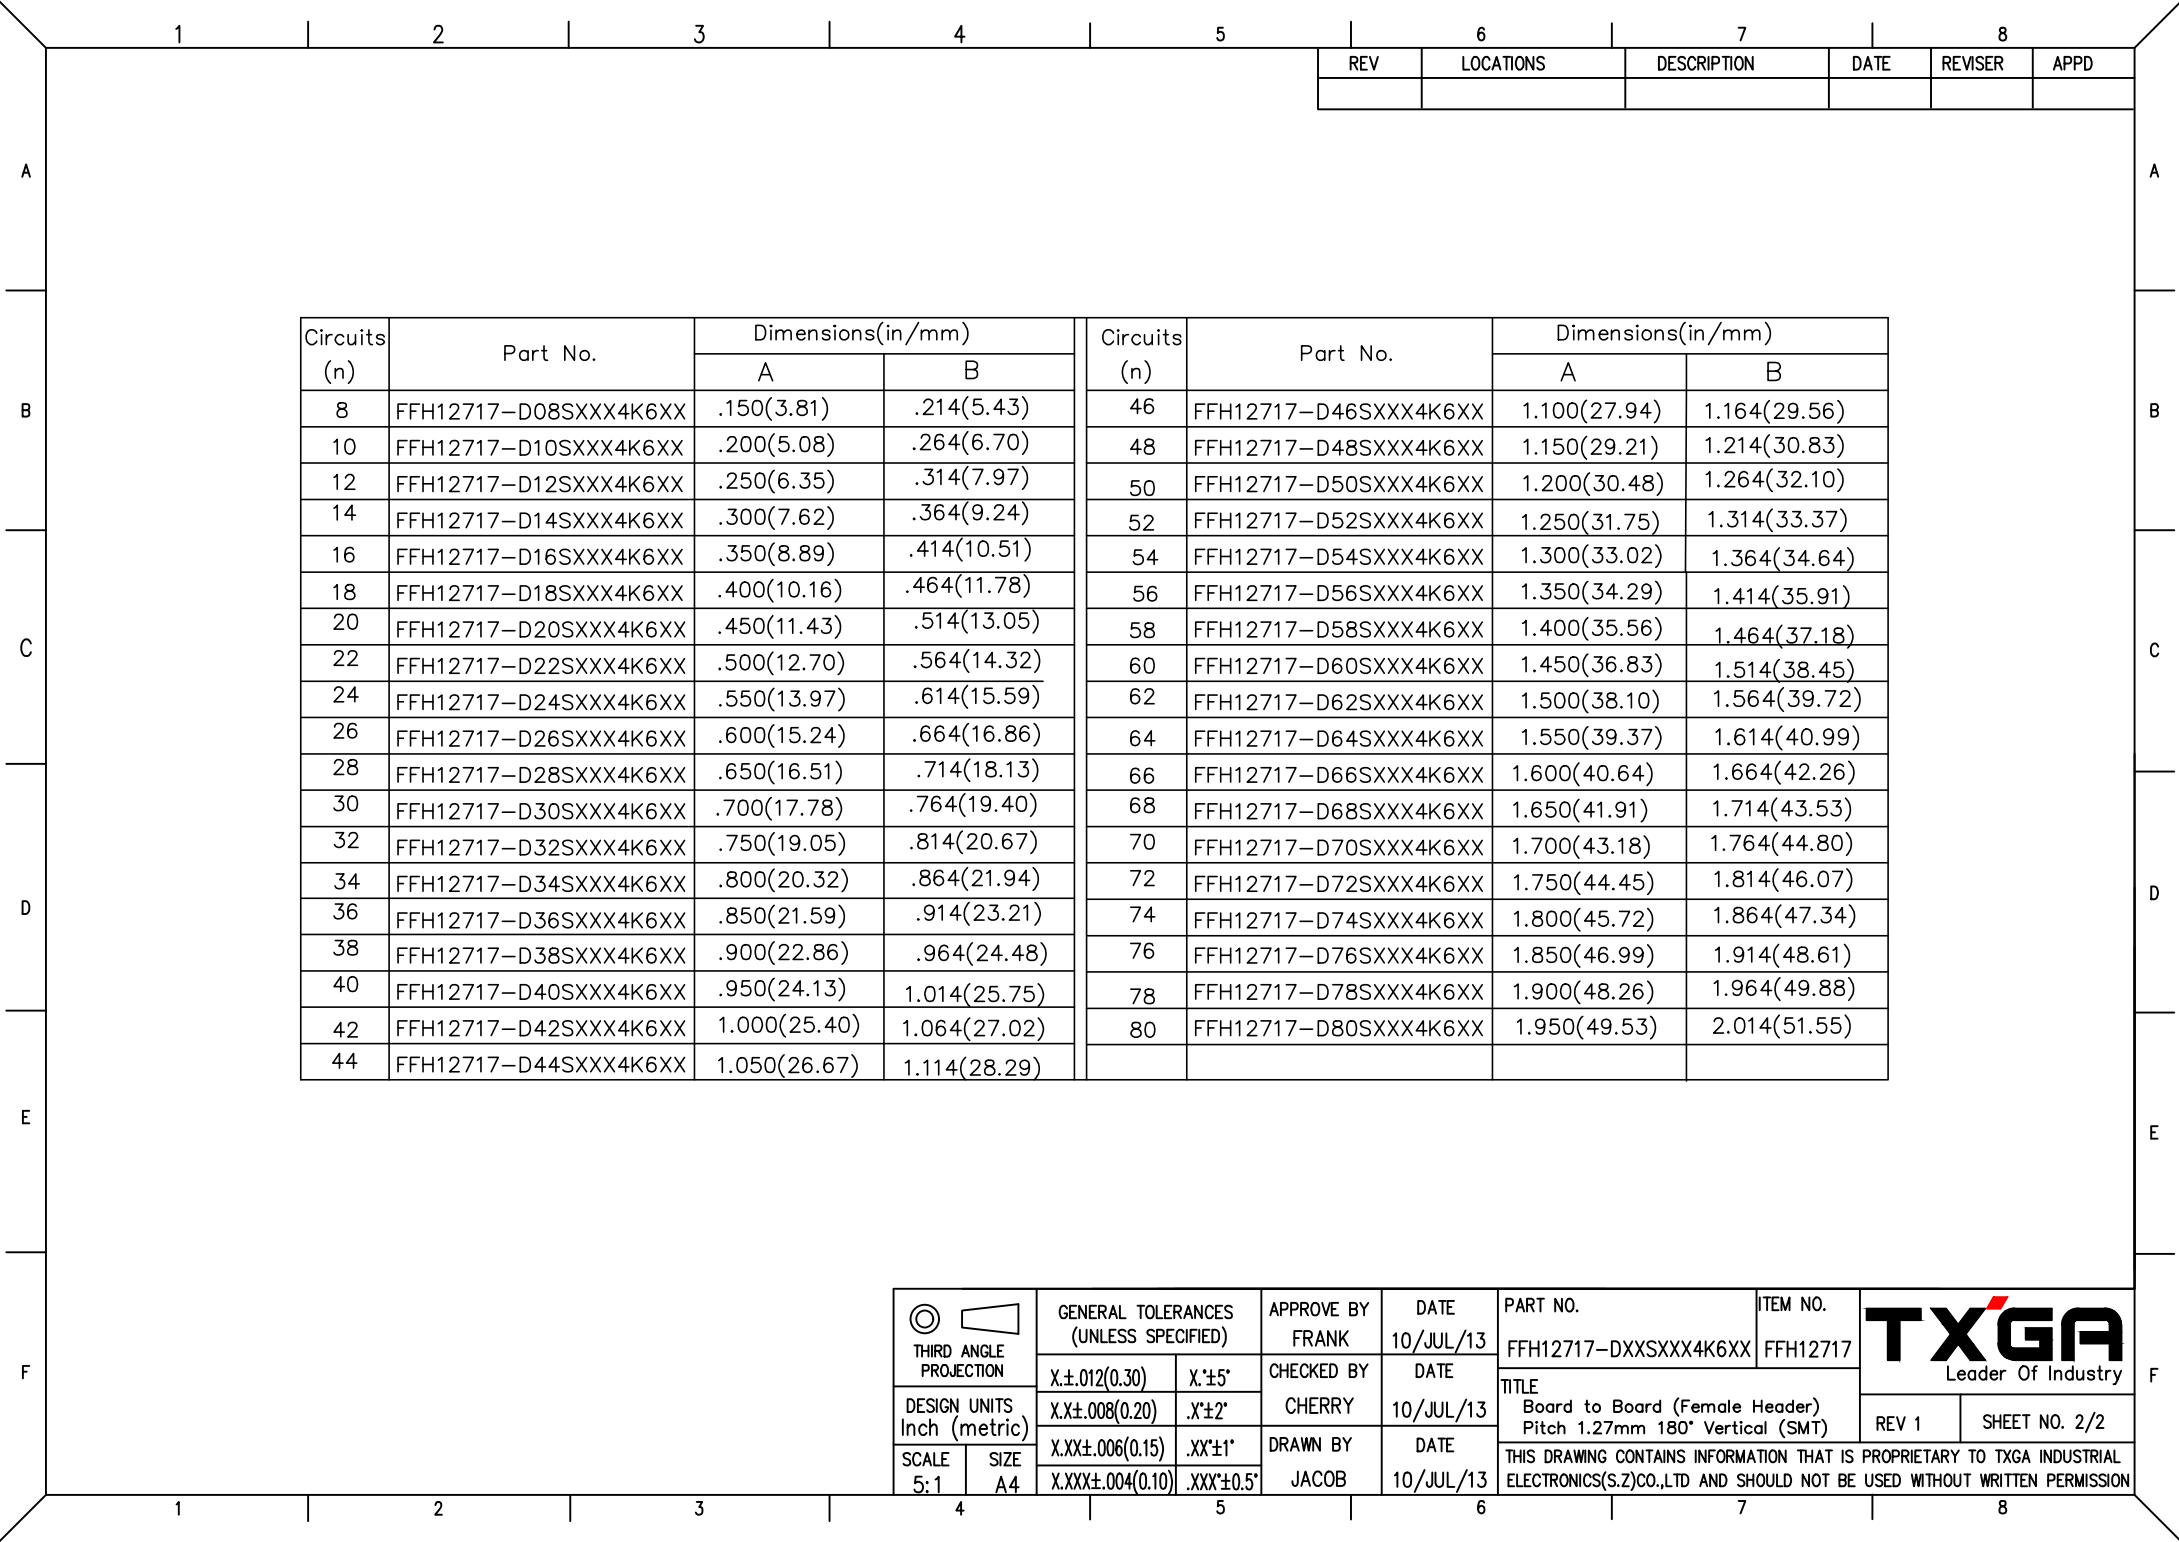

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
8	FFH12717-D08SXXX4K6XX	.150(3.81)	.214(5.43)	46	FFH12717-D46SXXX4K6XX	1.100(27.94)	1.164(29.56)
10	FFH12717-D10SXXX4K6XX	.200(5.08)	.264(6.70)	48	FFH12717-D48SXXX4K6XX	1.150(29.21)	1.214(30.83)
12	FFH12717-D12SXXX4K6XX	.250(6.35)	.314(7.97)	50	FFH12717-D50SXXX4K6XX	1.200(30.48)	1.264(32.10)
14	FFH12717-D14SXXX4K6XX	.300(7.62)	.364(9.24)	52	FFH12717-D52SXXX4K6XX	1.250(31.75)	1.314(33.37)
16	FFH12717-D16SXXX4K6XX	.350(8.89)	.414(10.51)	54	FFH12717-D54SXXX4K6XX	1.300(33.02)	1.364(34.64)
18	FFH12717-D18SXXX4K6XX	.400(10.16)	.464(11.78)	56	FFH12717-D56SXXX4K6XX	1.350(34.29)	1.414(35.91)
20	FFH12717-D20SXXX4K6XX	.450(11.43)	.514(13.05)	58	FFH12717-D58SXXX4K6XX	1.400(35.56)	1.464(37.18)
22	FFH12717-D22SXXX4K6XX	.500(12.70)	.564(14.32)	60	FFH12717-D60SXXX4K6XX	1.450(36.83)	1.514(38.45)
24	FFH12717-D24SXXX4K6XX	.550(13.97)	.614(15.59)	62	FFH12717-D62SXXX4K6XX	1.500(38.10)	1.564(39.72)
26	FFH12717-D26SXXX4K6XX	.600(15.24)	.664(16.86)	64	FFH12717-D64SXXX4K6XX	1.550(39.37)	1.614(40.99)
28	FFH12717-D28SXXX4K6XX	.650(16.51)	.714(18.13)	66	FFH12717-D66SXXX4K6XX	1.600(40.64)	1.664(42.26)
30	FFH12717-D30SXXX4K6XX	.700(17.78)	.764(19.40)	68	FFH12717-D68SXXX4K6XX	1.650(41.91)	1.714(43.53)
32	FFH12717-D32SXXX4K6XX	.750(19.05)	.814(20.67)	70	FFH12717-D70SXXX4K6XX	1.700(43.18)	1.764(44.80)
34	FFH12717-D34SXXX4K6XX	.800(20.32)	.864(21.94)	72	FFH12717-D72SXXX4K6XX	1.750(44.45)	1.814(46.07)
36	FFH12717-D36SXXX4K6XX	.850(21.59)	.914(23.21)	74	FFH12717-D74SXXX4K6XX	1.800(45.72)	1.864(47.34)
38	FFH12717-D38SXXX4K6XX	.900(22.86)	.964(24.48)	76	FFH12717-D76SXXX4K6XX	1.850(46.99)	1.914(48.61)
40	FFH12717-D40SXXX4K6XX	.950(24.13)	1.014(25.75)	78	FFH12717-D78SXXX4K6XX	1.900(48.26)	1.964(49.88)
42	FFH12717-D42SXXX4K6XX	1.000(25.40)	1.064(27.02)	80	FFH12717-D80SXXX4K6XX	1.950(49.53)	2.014(51.55)
44	FFH12717-D44SXXX4K6XX	1.050(26.67)	1.114(28.29)				

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 10/JUL/13	PART NO. FFH12717-DXXSXXX4K6XX	ITEM NO. FFH12717	 Leader Of Industry		
		X.±.012(0.30)	X.±5°	CHECKED BY CHERRY	DATE 10/JUL/13	TITLE Board to Board (Female Header) Pitch 1.27mm 180° Vertical (SMT)				
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X'±2°	DRAWN BY JACOB	DATE 10/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			REV 1	SHEET NO. 2/2
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1°		X.XXX±.004(0.10)				.XXX±0.5°	





REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical


Current Rating: 1A AC(rms)/DC
Voltage Rating: 250V AC(rms)/DC
Contact Resistance: 20 mΩ Max
Insulation Resistance: 1000 MΩ MIN
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -40°C~+85°C

Material and Plating


Housing: PA6T(UL 94V-0)
Contact Pin: Phosphor Bronze
Plating: Gold Plated/Selective gold on contact area,
tin on tail

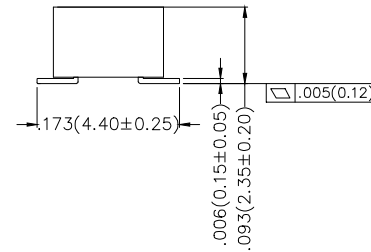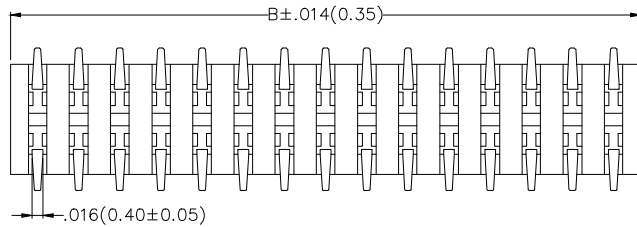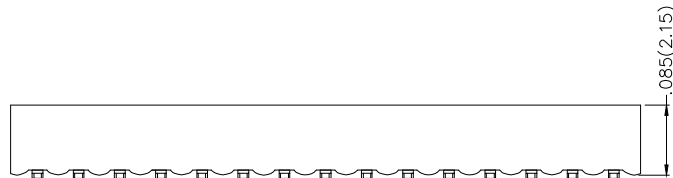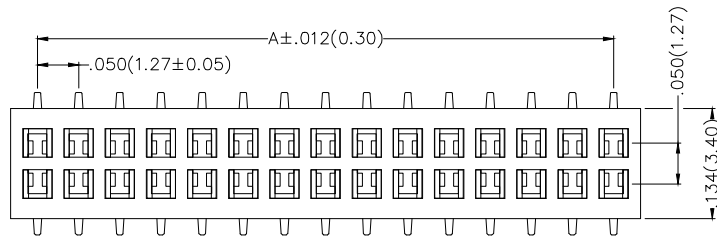

Packing: M—Reel(With Cap)




Packing: M1—Reel(With Mylar)



Ordering Information


FFH 127 17 — D XX S X XX 4 K6 XX A
1 2 3 4 5 6 7 8 9 10 11 12

1	Category FFH—Female Header	2	Series Number 127—Pitch1.27mm	3	Distinction No. 17	4	Row Option D—Double Row	5	Circuits XX	6	Entry Angle S—180° Vertical
7	Plating 1—Gold Plated 3—Selective gold on contact area, tin on tail	8	Thickness of Plating 00—Gold Flash 05—5μ" Custom plate available	9	Material—Resin 4—PA6T	10	Color—Resin K6—Black	11	Packaging M—Reel(With Cap) M1—Reel(With Mylar)	12	Type A—Without Position

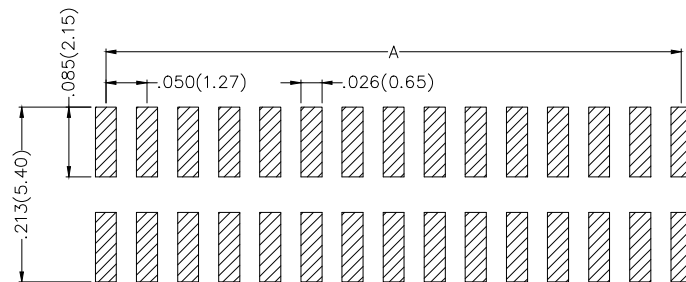

Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 10/JUL/13	PART NO. FFH12717-DXXSXXX4K6XXA	ITEM NO. FFH12717	 Leader Of Industry	
		X.±.012(0.30)	X.°±5°	CHECKED BY	DATE	TITLE			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X'±2°	CHERRY	10/JUL/13	Board to Board (Female Header) Pitch 1.27mm 180° Vertical (SMT)			
		X.XX±.006(0.15)	.XX'±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5°	JACOB	10/JUL/13				

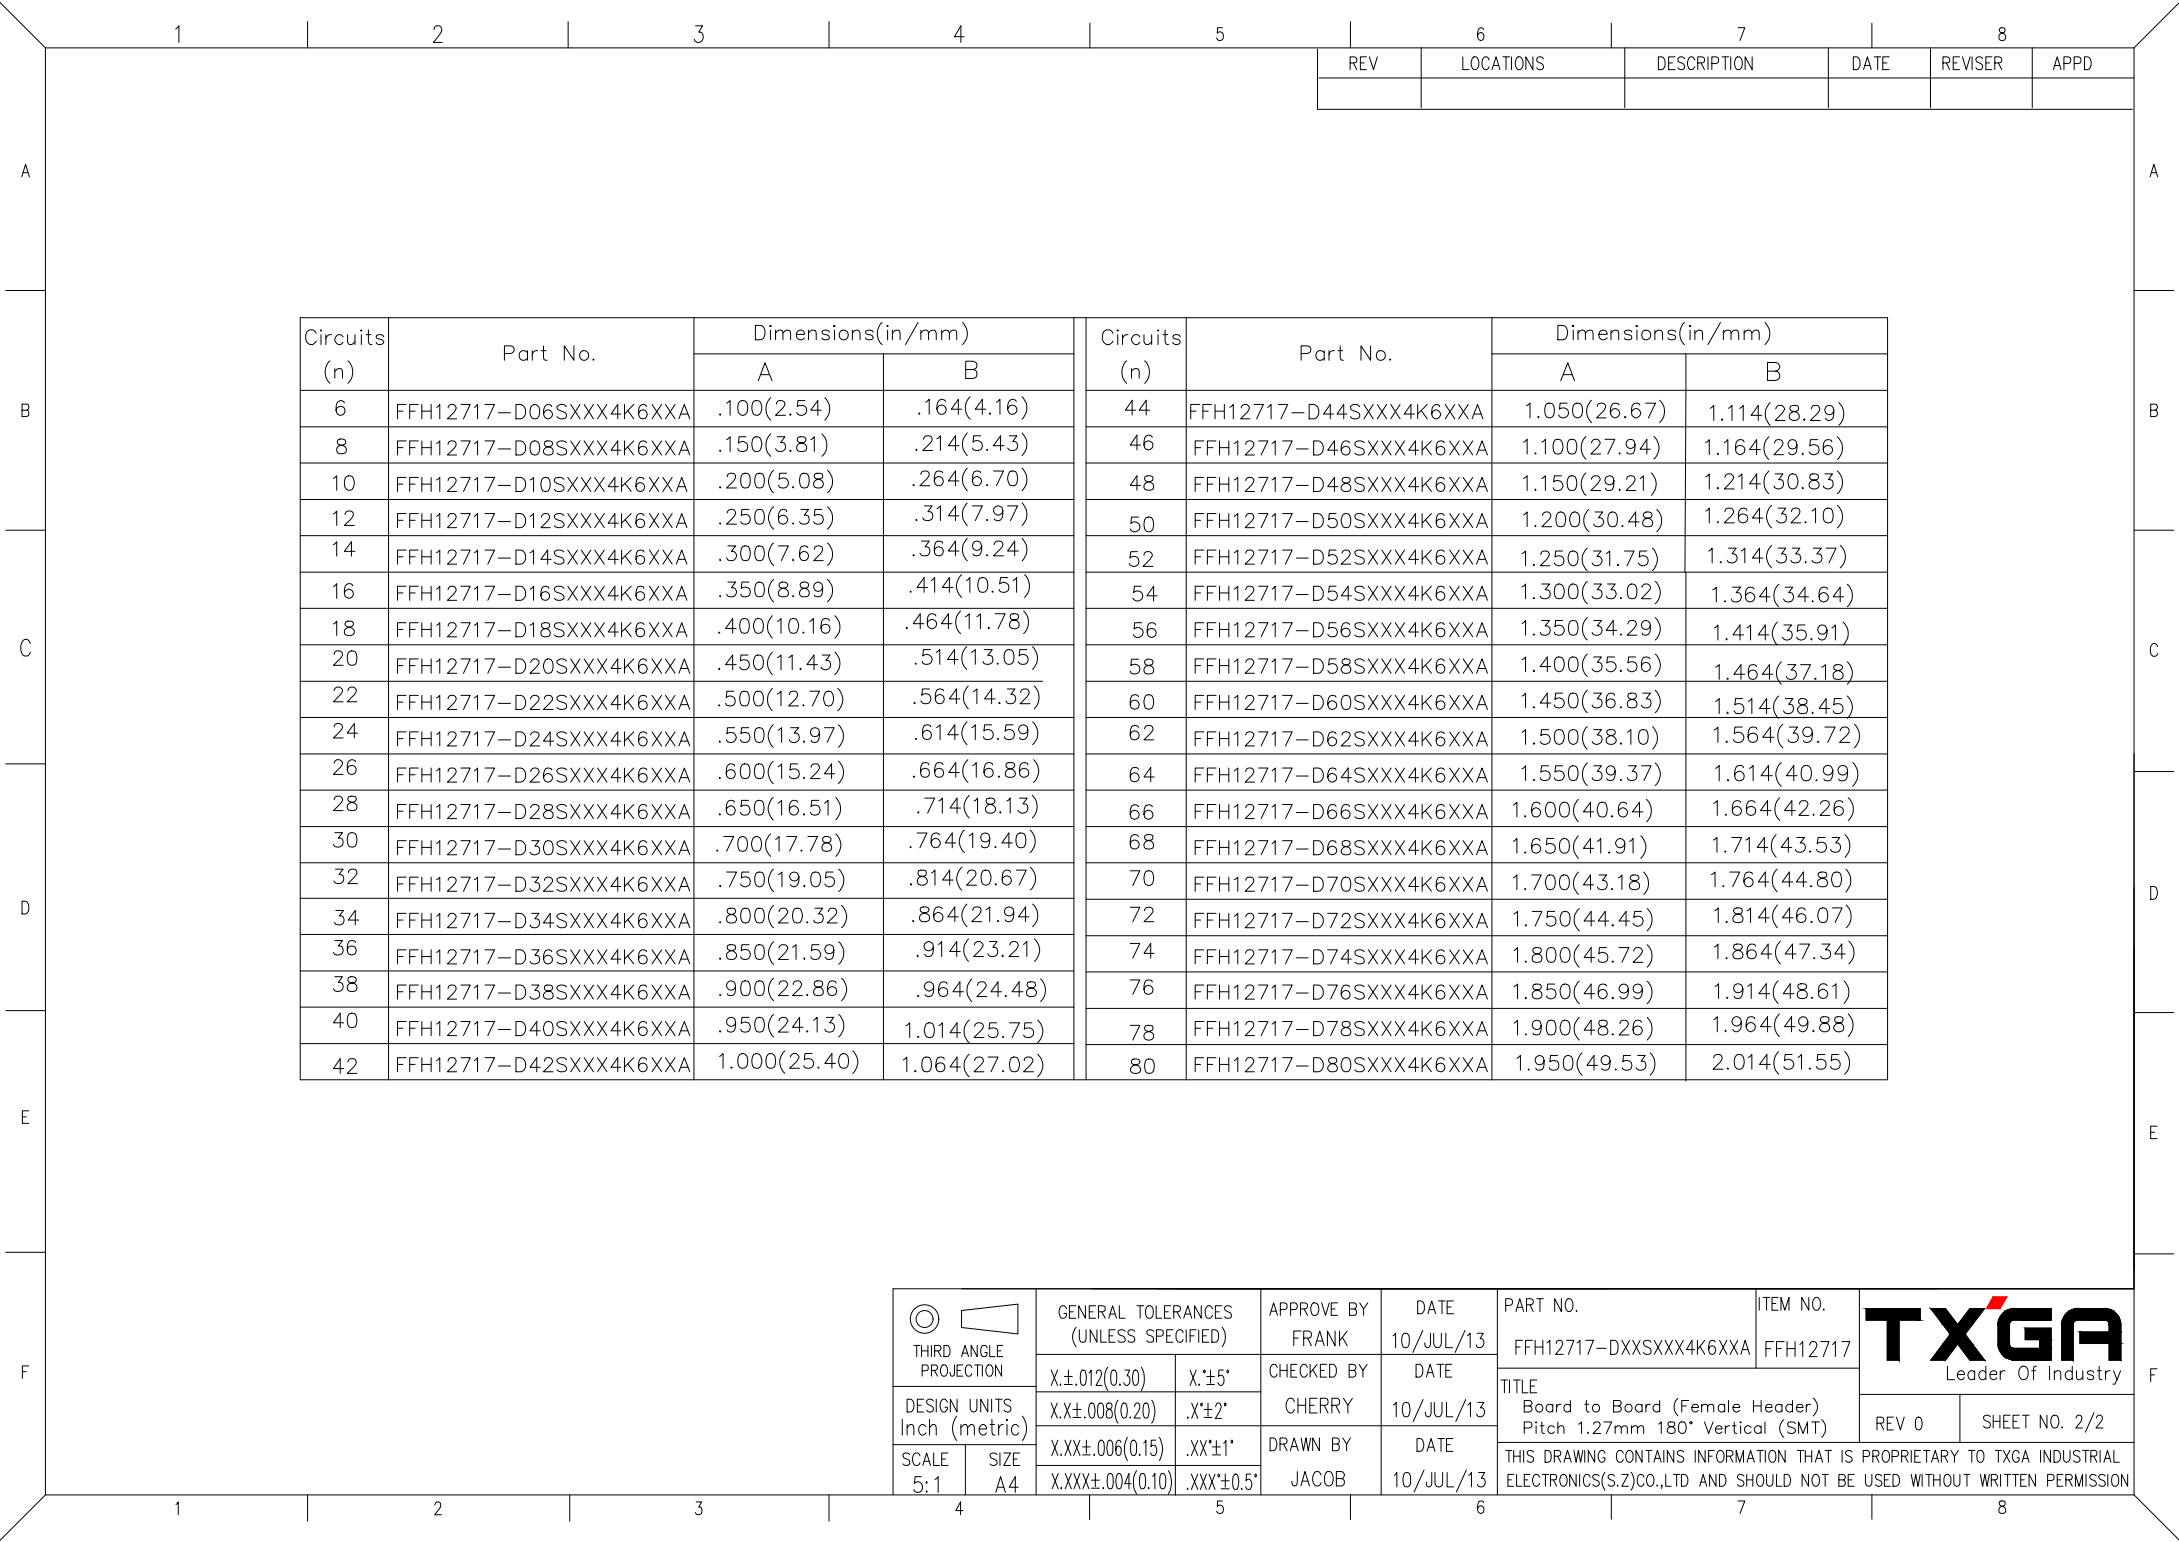

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
6	FFH12717-D06SXXX4K6XXA	.100(2.54)	.164(4.16)	44	FFH12717-D44SXXX4K6XXA	1.050(26.67)	1.114(28.29)
8	FFH12717-D08SXXX4K6XXA	.150(3.81)	.214(5.43)	46	FFH12717-D46SXXX4K6XXA	1.100(27.94)	1.164(29.56)
10	FFH12717-D10SXXX4K6XXA	.200(5.08)	.264(6.70)	48	FFH12717-D48SXXX4K6XXA	1.150(29.21)	1.214(30.83)
12	FFH12717-D12SXXX4K6XXA	.250(6.35)	.314(7.97)	50	FFH12717-D50SXXX4K6XXA	1.200(30.48)	1.264(32.10)
14	FFH12717-D14SXXX4K6XXA	.300(7.62)	.364(9.24)	52	FFH12717-D52SXXX4K6XXA	1.250(31.75)	1.314(33.37)
16	FFH12717-D16SXXX4K6XXA	.350(8.89)	.414(10.51)	54	FFH12717-D54SXXX4K6XXA	1.300(33.02)	1.364(34.64)
18	FFH12717-D18SXXX4K6XXA	.400(10.16)	.464(11.78)	56	FFH12717-D56SXXX4K6XXA	1.350(34.29)	1.414(35.91)
20	FFH12717-D20SXXX4K6XXA	.450(11.43)	.514(13.05)	58	FFH12717-D58SXXX4K6XXA	1.400(35.56)	1.464(37.18)
22	FFH12717-D22SXXX4K6XXA	.500(12.70)	.564(14.32)	60	FFH12717-D60SXXX4K6XXA	1.450(36.83)	1.514(38.45)
24	FFH12717-D24SXXX4K6XXA	.550(13.97)	.614(15.59)	62	FFH12717-D62SXXX4K6XXA	1.500(38.10)	1.564(39.72)
26	FFH12717-D26SXXX4K6XXA	.600(15.24)	.664(16.86)	64	FFH12717-D64SXXX4K6XXA	1.550(39.37)	1.614(40.99)
28	FFH12717-D28SXXX4K6XXA	.650(16.51)	.714(18.13)	66	FFH12717-D66SXXX4K6XXA	1.600(40.64)	1.664(42.26)
30	FFH12717-D30SXXX4K6XXA	.700(17.78)	.764(19.40)	68	FFH12717-D68SXXX4K6XXA	1.650(41.91)	1.714(43.53)
32	FFH12717-D32SXXX4K6XXA	.750(19.05)	.814(20.67)	70	FFH12717-D70SXXX4K6XXA	1.700(43.18)	1.764(44.80)
34	FFH12717-D34SXXX4K6XXA	.800(20.32)	.864(21.94)	72	FFH12717-D72SXXX4K6XXA	1.750(44.45)	1.814(46.07)
36	FFH12717-D36SXXX4K6XXA	.850(21.59)	.914(23.21)	74	FFH12717-D74SXXX4K6XXA	1.800(45.72)	1.864(47.34)
38	FFH12717-D38SXXX4K6XXA	.900(22.86)	.964(24.48)	76	FFH12717-D76SXXX4K6XXA	1.850(46.99)	1.914(48.61)
40	FFH12717-D40SXXX4K6XXA	.950(24.13)	1.014(25.75)	78	FFH12717-D78SXXX4K6XXA	1.900(48.26)	1.964(49.88)
42	FFH12717-D42SXXX4K6XXA	1.000(25.40)	1.064(27.02)	80	FFH12717-D80SXXX4K6XXA	1.950(49.53)	2.014(51.55)

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 10/JUL/13	PART NO. FFH12717-DXXSXXX4K6XXA	ITEM NO. FFH12717	 Leader Of Industry	
		X.±.012(0.30)	X.±5°	CHECKED BY CHERRY	DATE 10/JUL/13	TITLE Board to Board (Female Header) Pitch 1.27mm 180° Vertical (SMT)			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X'±2°	DRAWN BY JACOB	DATE 10/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX±.004(0.10)	.XXX'±0.5°						
						REV 0		SHEET NO. 2/2	