




1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



SPECIFICATIONS

Material
 Body: Zinc die-cast, powder-coated (Grey)
 Mechanical
 Temperature Range-Operating: -40°C ~ +125°C
 Degree of protection: IP65 (sealed state)
 Cable entry: Top cable entry

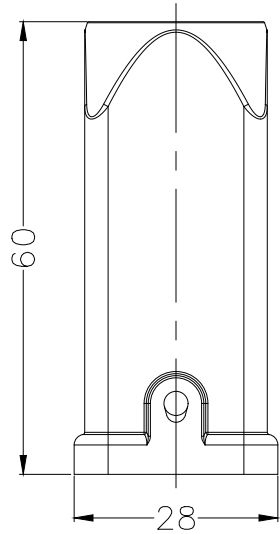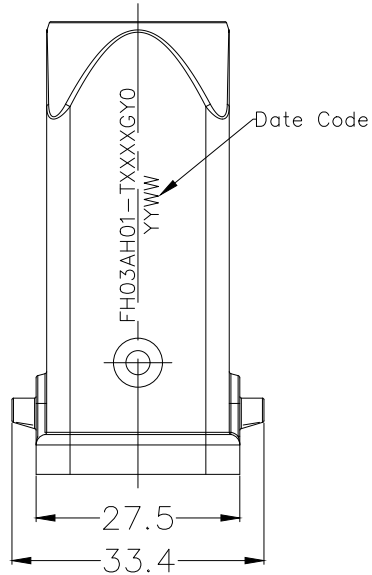

Ordering Information

FH03A H 01 - T XXXX GY 0
 1 2 3 4 5

1	Category FH03A-Shell	2	Style H-Hood	3	Cable entry T-Top cable entry	4	Thread specification M200-M20 P110-PG11 P135-PG13.5	5	Color GY-Gray
---	-------------------------	---	-----------------	---	----------------------------------	---	--	---	------------------

Part NO.	Thread size
FH03AH01-TM200GY0	M20
FH03AH01-TP110GY0	PG11
FH03AH01-TP135GY0	PG13.5

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FH03AH01-TXXXXGY0	ITEM NO. FH03AH01	<p>Building Technology Cornerstone</p>	
	X. ±0.30	X.* ±5'	CHECKED BY GISELLE	DATE 05/Jul/21	TITLE Heavy-duty connector H3A Hood			REV 0
	DESIGN UNITS mm	X.X ±0.20	X.X' ±2'	DRAWN BY PYD	DATE 05/Jul/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1'	X.XXX ±0.10	X.XXX' ±0.5'		

1 2 3 4 5 6 7 8