


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Materiall and Plating
Body: Aluminium die-cast,powder-coated(Grey)
Locking element: Electroplated zinc
Sealing element: NBR
Mechanical
Temperature Range-Operating: -40℃~+125℃
Degree of protection: IP65(sealed state)
Cable entry:Side cable entry
Thread size:M/PG

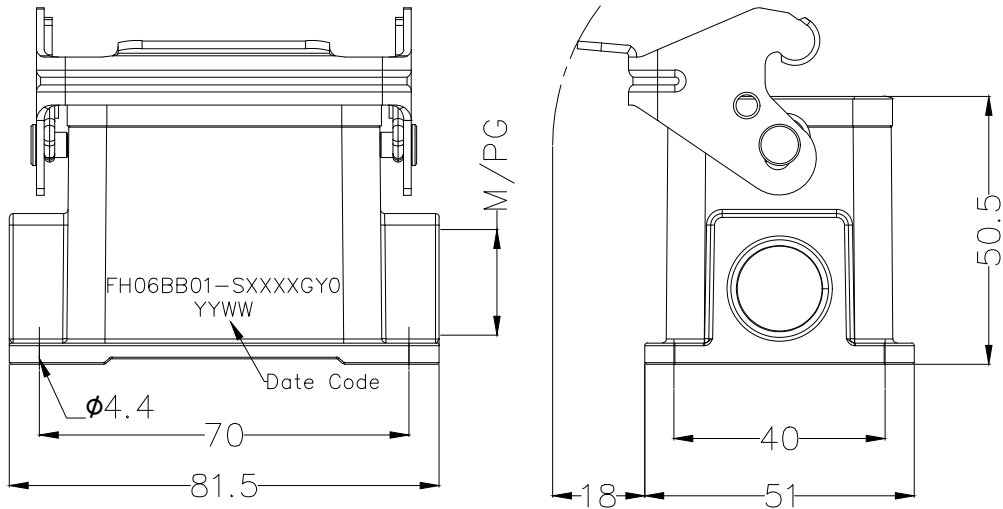

Ordering Information

FH06B B 01 - S XXXX GY 0
1 2 3 4 5

1	Category FH06B-Shell	Style B-Base shell	3	Cable entry S-Side cable entry	4	Thread specification M200-M20 M250-M25 P135-PG13.5 P160-PG16	5	Color GY-Gray
---	-------------------------	-----------------------	---	-----------------------------------	---	--	---	------------------

Part NO.	Thread size
FH06BB01-SM200GY0	M20
FH06BB01-SM250GY0	M25
FH06BB01-SP135GY0	PG13.5
FH06BB01-SP160GY0	PG16

		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Building Technology Cornerstone	
THIRD ANGLE PROJECTION				LEO	30/JUN/21	FH06BB01-SXXXXGY0	FH06BB01		
DESIGN UNITS mm		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector H6B Base shell		REV 0 SHEET NO. 1/1	
		X.X ±0.20	X.* ±2°	GISELLE	30/JUN/21				
		X.XX ±0.15	X.XX' ±1°						
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX' ±0.5°	DRAWN BY PYD	DATE 30/JUN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			