

12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

A

SPECIFICATIONS

Material and Plating

Body: Aluminium die-cast,powder-coated(Grey)

Mechanical

Temperature Range-Operating: -40℃~+125℃

Degree of protection: IP65(sealed state)

Cable entry:Side cable entry



Thread size:M/PG

B

B

C

C

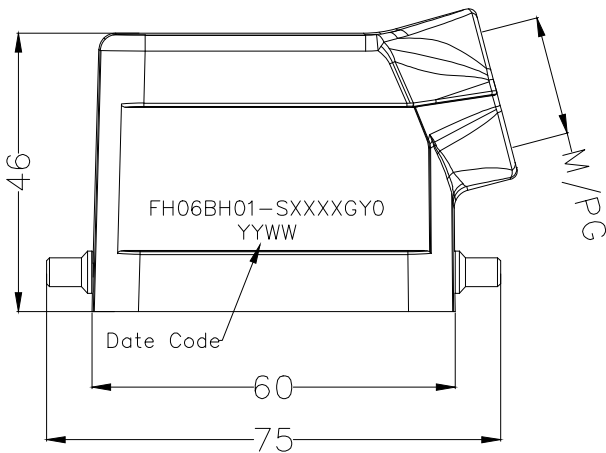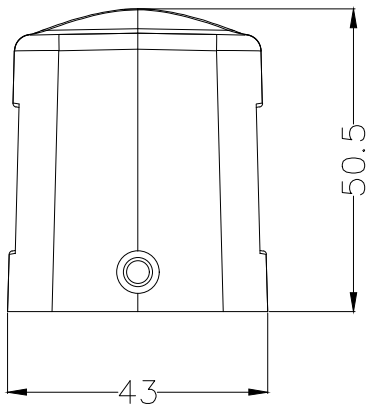

D

D

Ordering Information

FH06B H 01 - S XXXX GY 0
1 2 3 4 5

E

E

1	Category FH06B-Shell	Style H-Hood	3	Cable entry S-Side cable entry	4	Thread specification M200-M20 M250-M25 P135-PG13.5 P160-PG16	5	Color GY-Gray
---	-------------------------	-----------------	---	-----------------------------------	---	--	---	------------------

F

F

Part NO.	Thread size
FH06BH01-SM200GY0	M20
FH06BH01-SM250GY0	M25
FH06BH01-SP135GY0	PG13.5
FH06BH01-SP160GY0	PG16

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FH06BH01-SXXXXGY0	ITEM NO. FH06BH01	 Building Technology Cornerstone	
DESIGN UNITS mm		X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 30/JUN/21	TITLE Heavy-duty connector H6B Hood		REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°	DRAWN BY PYD	DATE 30/JUN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XXX* ±0.5°						

12345678