
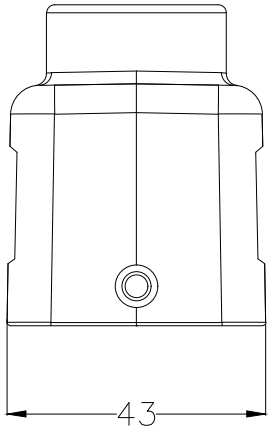


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Material and Plating
Body: Aluminium die-cast,powder-coated(Grey)
Mechanical
Temperature Range-Operating: -40℃~+125℃
Degree of protection: IP65(sealed state)
Cable entry:Top cable entry
Thread size:M/PG

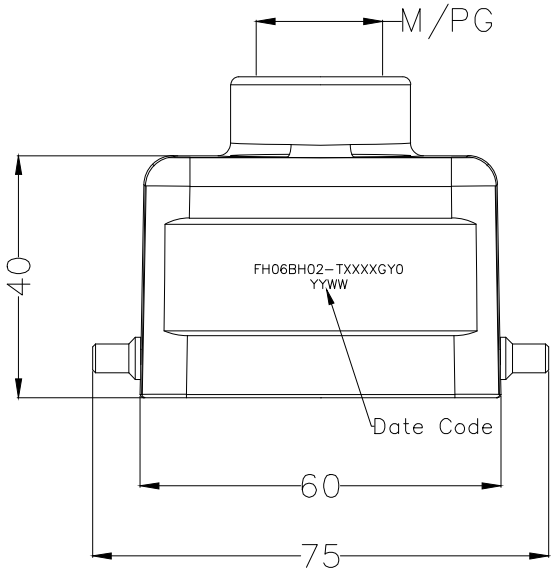

Ordering Information

FH06BH02-TXXXXGY0
12345

1	Category FH06B-Shell	Style H-Hood	3	Cable entry T-Top cable entry	4	Thread specification M200-M20 M250-M25 P135-PG13.5 P160-PG16	5	Color GY-Gray
---	-------------------------	-----------------	---	----------------------------------	---	--	---	------------------

Part NO.	Thread size
FH06BH02-TM200GY0	M20
FH06BH02-TM250GY0	M25
FH06BH02-TP135GY0	PG13.5
FH06BH02-TP160GY0	PG16

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FH06BH02-TXXXXGY0	ITEM NO. FH06BH02	 Building Technology Cornerstone		
		X. ±0.30	X.* ±5'	CHECKED BY	DATE	TITLE				
DESIGN UNITS mm		X.X ±0.20	X.X' ±2'	GISELLE	30/JUN/21	Heavy-duty connector H6B Hood			REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
		X.XXX ±0.10	X.XX' ±0.5'	PYD	30/JUN/21					