


12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Material
Body: Aluminium die-cast,powder-coated(Grey)
Locking element: Galvanized iron
Mechanical
Temperature Range-Operating: -40℃~+125℃
Degree of protection: IP65(sealed state)
Cable entry:Side cable entry

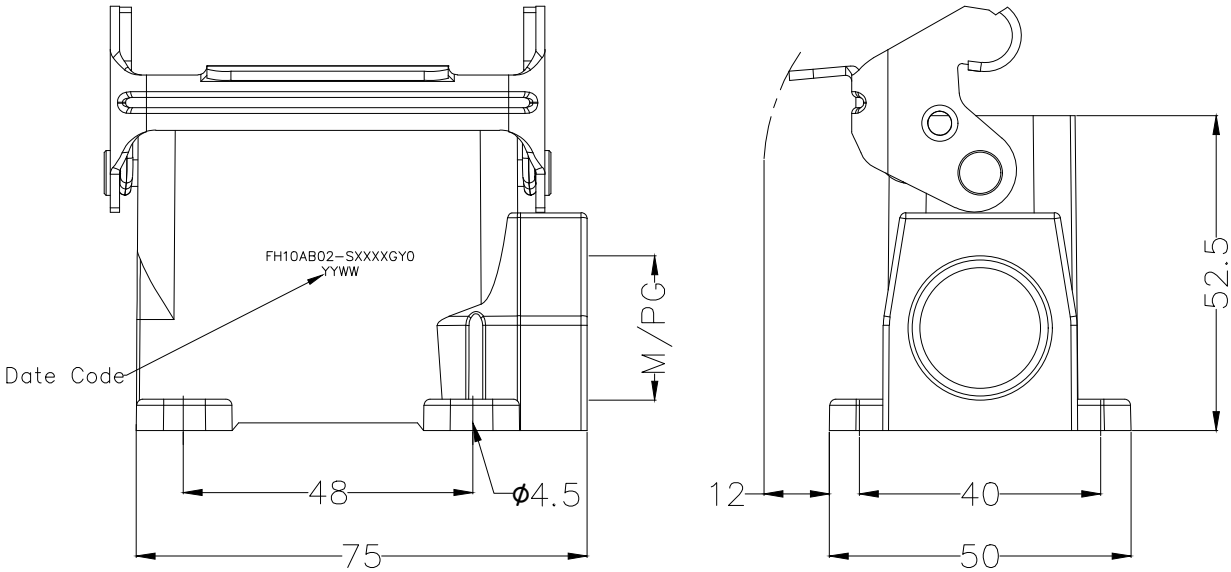

Ordering Information

FH10A B 02 - S XXXX GY 0
1 2 3 4 5

1	Category FH10A-Shell	2	Style B-Base shell	3	Cable entry S-Side cable entry	4	Thread specification M200-M20 M250-M25 P160-PG16 P210-PG21	5	Color GY-Gray
---	-------------------------	---	-----------------------	---	-----------------------------------	---	--	---	------------------

Part NO.	Thread size
FH10AB02-SM200GY0	M20
FH10AB02-SM250GY0	M25
FH10AB02-SP160GY0	PG16
FH10AB02-SP210GY0	PG21

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FH10AB02-SXXXXGY0	ITEM NO. FH10AB02	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5'	CHECKED BY	DATE				
DESIGN UNITS mm		X.X ±0.20	X.X' ±2'	GISELLE	05/Jul/21	TITLE Heavy-duty connector H10A Base shell			
		X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE				
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX' ±0.5'	PYD	05/Jul/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
						REV 0		SHEET NO. 1/1	

12345678