


12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Material
Body: Aluminium die-cast,powder-coated(Grey)
Sealing element: NBR
Mechanical
Temperature Range-Operating: -40℃~+125℃
Degree of protection: IP65(sealed state)
Cable entry:Side cable entry

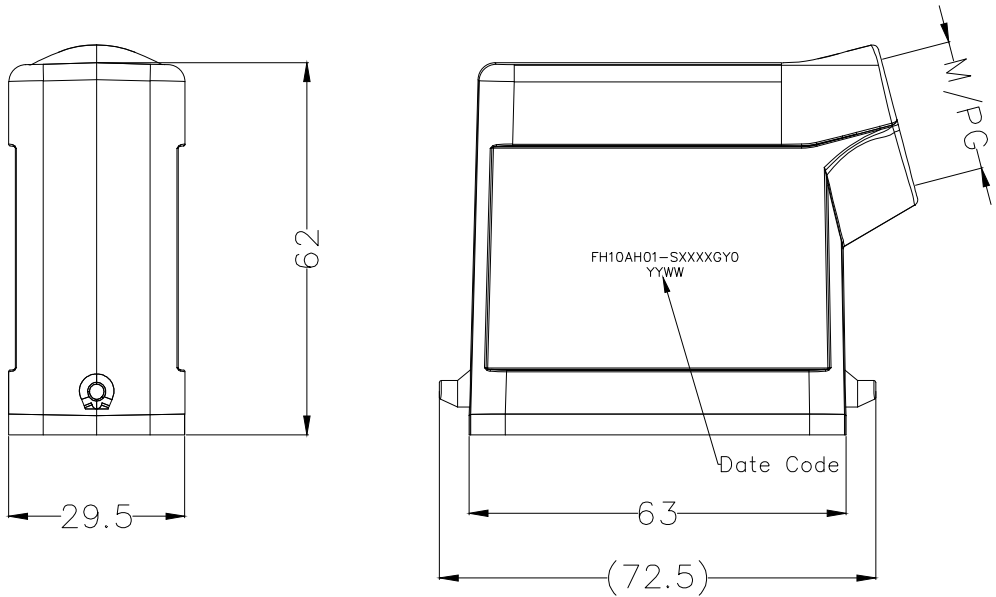

Ordering Information

FH10A H 01 - S XXXX GY 0
1 2 3 4 5

1	Category	2	Style	3	Cable entry	4	Thread specification	5	Color
	FH10A-Shell		H-Hood		S-Side cable entry		M200-M20 P160-PG16		GY-Gray

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO. FH10AH01-SXXXXGY0	ITEM NO. FH10AH01	 Building Technology Cornerstone	
				LEO	05/Jul/21				
DESIGN UNITS mm		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector H10A Hood		REV 0	SHEET NO. 1/1
		X.X ±0.20	X.X* ±2°	GISELLE	05/Jul/21				
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XXX* ±0.5°	PYD	05/Jul/21				

Part NO.	Thread size
FH10AH01-SM200GY0	M20
FH10AH01-SP160GY0	PG16

12345678