

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	

A

A

B

B

C

C

D

D

E

E

F

F

SPECIFICATIONS

Materiall and Plating

Body: Aluminium die-cast,powder-coated(Grey)

Locking element: Electroplated zinc




Sealing element: NBR

Mechanical

Temperature Range-Operating: -40℃~+125℃

Degree of protection: IP65(sealed state)

Cable entry:Bottom cable entry

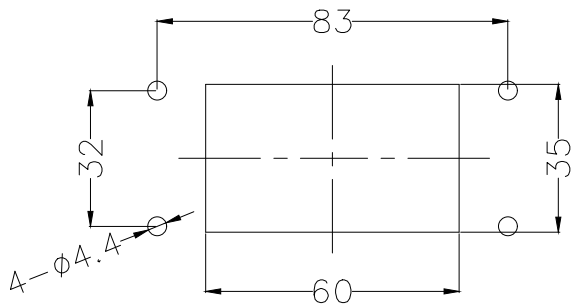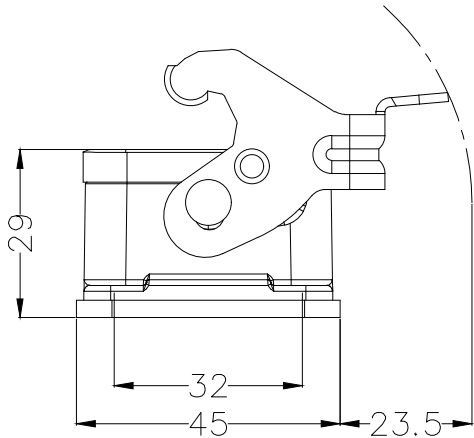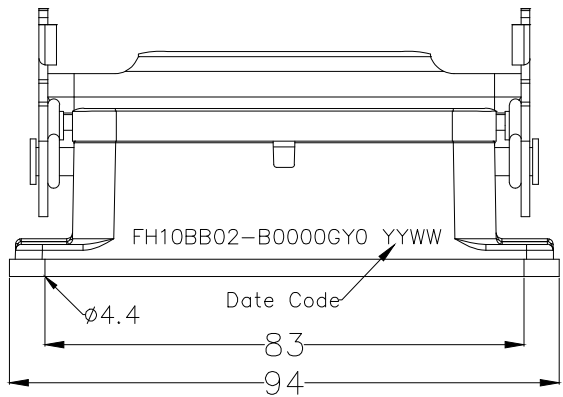

Recommended Panel Layout

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FH10BB02-B0000GY0		ITEM NO. FH10BB02		 Building Technology Cornerstone	
				CHECKED BY GISELLE	DATE 30/JUN/21	TITLE Heavy-duty connector H10B Base shell					
DESIGN UNITS mm		X. ±0.30	X.* ±5°	DRAWN BY PYD	DATE 30/JUN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
		X.X ±0.20	X.X* ±2°								
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°								
		X.XXX ±0.10	X.XXX* ±0.5°								
						REV 0		SHEET NO. 1/1			