


12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

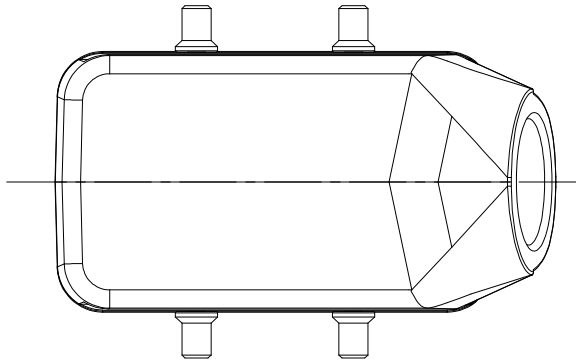

SPECIFICATIONS

Material and Plating
Body: Aluminium die-cast, powder-coated (Grey)
Mechanical
Temperature Range—Operating: -40℃~+125℃
Degree of protection: IP65 (sealed state)
Cable entry: Side cable entry
Thread size: M/PG



A

B

B

C

C

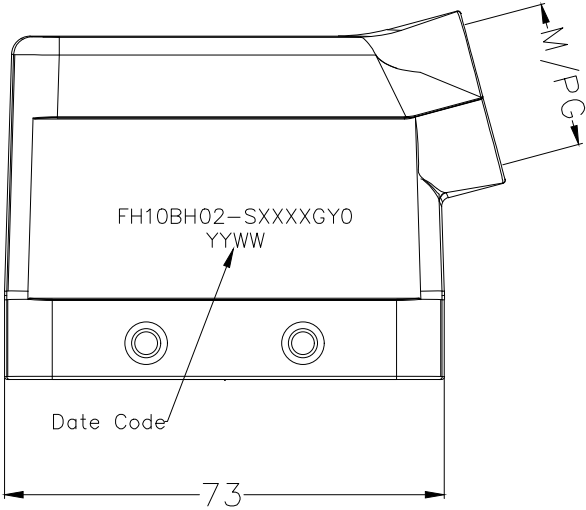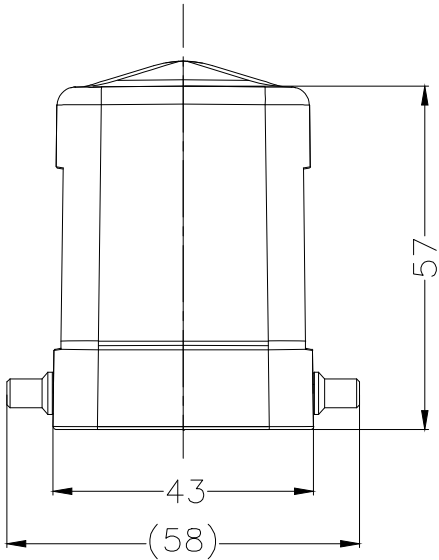

D

D

Ordering Information

FH10B H 02 — S XXXX GY 0
1 2 3 4 5

1	Category FH10B—Shell	Style H—Hood	3	Cable entry S—Side cable entry	4	Thread specification M200—M20 M250—M25 P160—PG16	5	Color GY—Gray
---	-------------------------	-----------------	---	-----------------------------------	---	---	---	------------------

E

E

F

F

Part NO.	Thread size
FH10BH02—SM200GY0	M20
FH10BH02—SM250GY0	M25
FH10BH02—SP160GY0	PG16

12345678

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FH10BH02-SXXXXGY0	ITEM NO. FH10BH02	 Building Technology Cornerstone	
				CHECKED BY GISELLE	DATE 30/JUN/21				
DESIGN UNITS mm		X. ±0.30	X.* ±5°	DRAWN BY PYD	DATE 30/JUN/21	TITLE Heavy-duty connector H10B Hood		REV 0	SHEET NO. 1/1
		X.X ±0.20	X.X* ±2°						
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XXX* ±0.5°						