

12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

A

SPECIFICATIONS

Material and Plating

Body: Aluminium die-cast,powder-coated(Grey)

Mechanical

Temperature Range-Operating: -40℃~+125℃

Degree of protection: IP65(sealed state)

Cable entry:Side cable entry



Thread size:M/PG

B

B

C

C

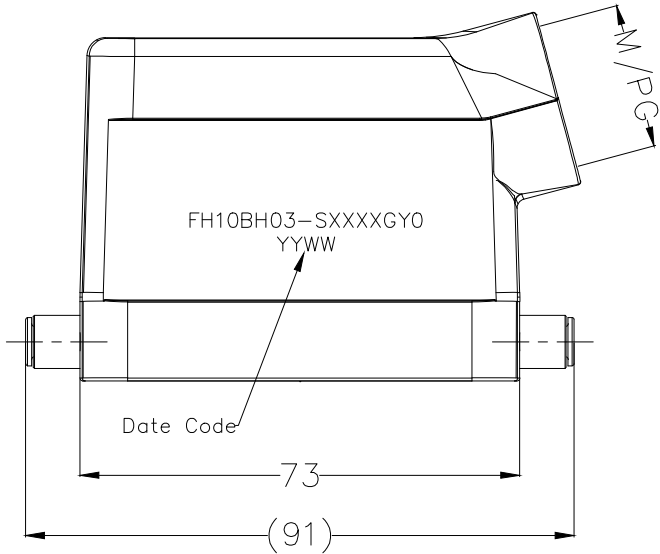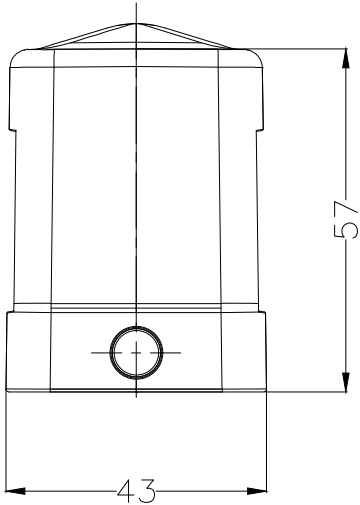

D

D

Ordering Information

FH10B H 03 - S XXXX GY 0
1 2 3 4 5

1	Category FH10B-Shell	Style H-Hood	3	Cable entry S-Side cable entry	4	Thread specification M200-M20 M250-M25 P160-PG16	5	Color GY-Gray
---	-------------------------	-----------------	---	-----------------------------------	---	---	---	------------------

E

E

F

F

Part NO.	Thread size
FH10BH03-SM200GY0	M20
FH10BH03-SM250GY0	M25
FH10BH03-SP160GY0	PG16

12345678

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FH10BH03-SXXXXGY0		ITEM NO. FH10BH03	 Building Technology Cornerstone	
				CHECKED BY GISELLE	DATE 30/JUN/21	TITLE Heavy-duty connector H10B Hood				
DESIGN UNITS mm		X. ±0.30	X.* ±5'	DRAWN BY PYD	DATE 30/JUN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/1	
		X.X ±0.20	X.X' ±2'							
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1'							
		X.XXX ±0.10	X.XXX' ±0.5'							