
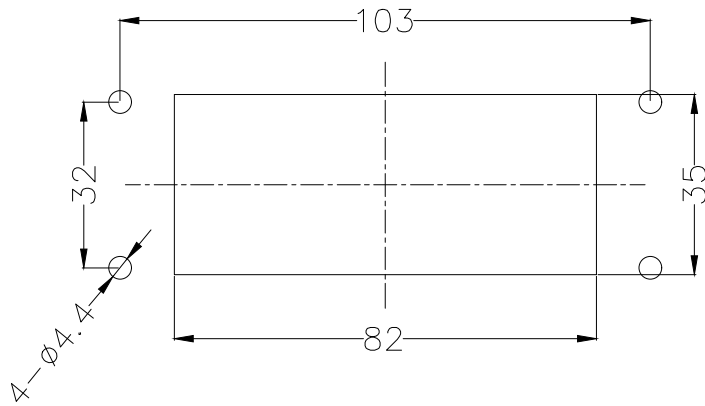

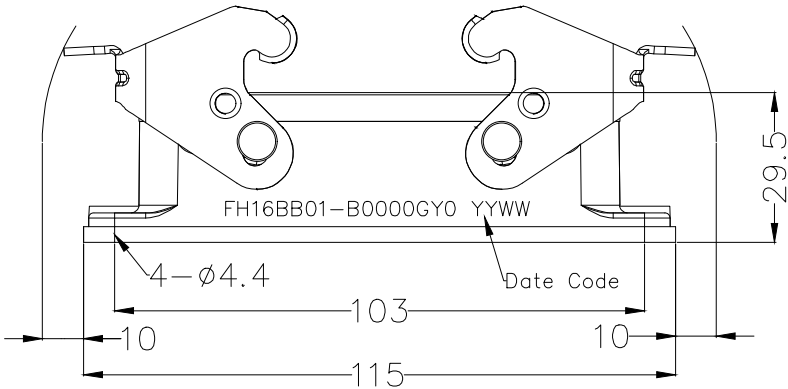


1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Materiall and Plating
Body: Aluminium die-cast,powder-coated(Grey)
Locking element: Electroplated zinc
Sealing element: NBR
Mechanical
Temperature Range-Operating: -40℃~+125℃
Degree of protection: IP65(sealed state)
Cable entry:Bottom cable entry

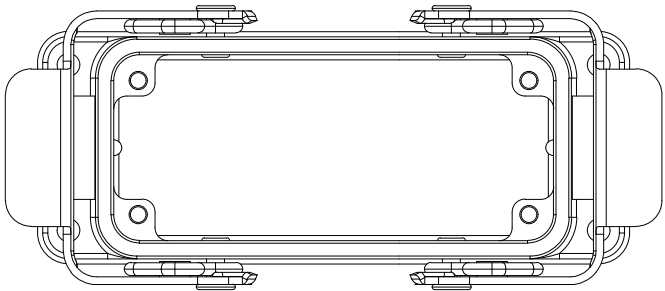

Recommended Panel Layout

A

B

C

D

E

F

A

B

C

D

E

F

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FH16BB01-B0000GY0		ITEM NO. FH16BB01		 Building Technology Cornerstone	
DESIGN UNITS mm				X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector H16B Base shell			
		X.X ±0.20	X.X' ±2"	GISELLE	30/JUN/21						
		SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XXX' ±0.5°	PYD	30/JUN/21						

1 2 3 4 5 6 7 8