


12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Material
Body: Aluminium die-cast,powder-coated(Grey)
Mechanical
Temperature Range-Operating: -40℃~+125℃
Degree of protection: IP65(sealed state)
Cable entry:Side cable entry

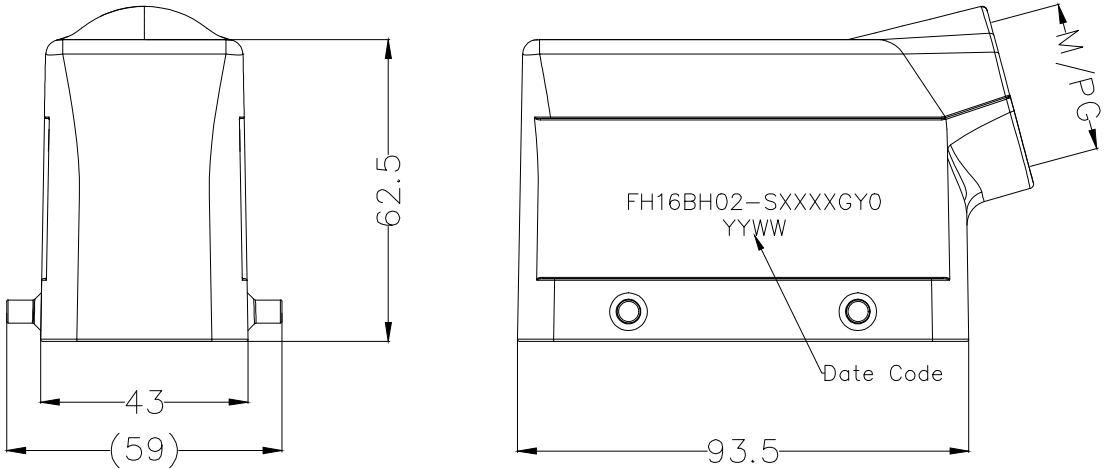

Ordering Information

FH16B H 02 S XXXX GY 0
1 2 3 4 5

1	Category	2	Style	3	Cable entry	4	Thread specification	5	Color
	FH16B-Shell		H-Hood		S-Side cable entry		M250-M25 M320-M32 P210-PG21		GY-Gray

Part NO.	Thread size
FH16BH02-SM250GY0	M25
FH16BH02-SM320GY0	M32
FH16BH02-SP210GY0	PG21

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FH16BH02-SXXXXGY0	ITEM NO. FH16BH02	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector H16B Hood			
DESIGN UNITS mm		X.X ±0.20	X.X' ±2°	GISELLE	05/Jul/21			REV 0	
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XX' ±0.5°	PYD	05/Jul/21				

12345678