
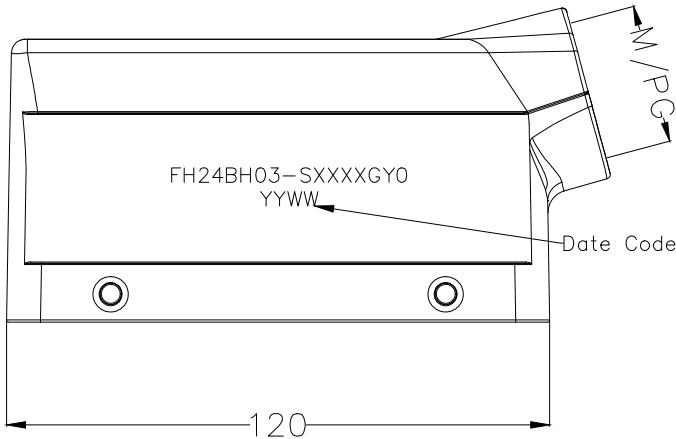


12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Material
Body: Aluminium die-cast,powder-coated(Grey)
Mechanical
Temperature Range-Operating: -40℃~+125℃
Degree of protection: IP65(sealed state)
Cable entry:Side cable entry

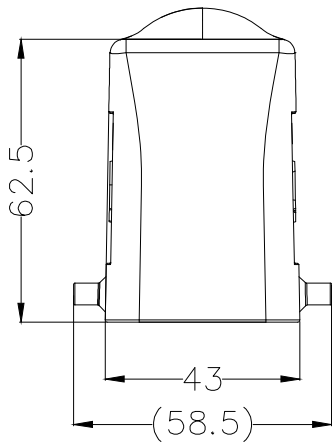

Ordering Information

FH24B H 03 S XXXX GY 0
1 2 3 4 5

1	Category FH24B-Shell	2	Style H-Hood	3	Cable entry S-Side cable entry	4	Thread specification M250-M25 M320-M32 P210-PG21	5	Color GY-Gray
---	-------------------------	---	-----------------	---	-----------------------------------	---	---	---	------------------

Part NO.	Thread size
FH24BH03-SM250GY0	M25
FH24BH03-SM320GY0	M32
FH24BH03-SP210GY0	PG21

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FH24BH03-SXXXXGY0	ITEM NO. FH24BH03	 Building Technology Cornerstone		
				CHECKED BY GISELLE	DATE 05/Jul/21					
DESIGN UNITS mm		X. ±0.30	X.* ±5°	DRAWN BY PYD	DATE 05/Jul/21	TITLE Heavy-duty connector H24B Hood			REV 0	SHEET NO. 1/1
		X.X ±0.20	X.X* ±2°							
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
		X.XXX ±0.10	X.XXX* ±0.5°							

12345678