

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD





SPECIFICATION

Technical Parameters

No. of contact: 42
Rated current:10A
Rated voltage:150V
Rated impulse voltage:2.5KV
Insulation resistance: $10^{10}\Omega$ MIN
Temperature range:−40℃~+125℃
Pollution degree: 3

Mechanical

Connection method:Riveting
Durability:500 cycles MIN
Material and Plating
Insulators:PC(UL 94V−0),Light grey

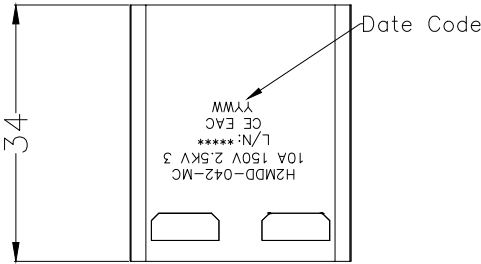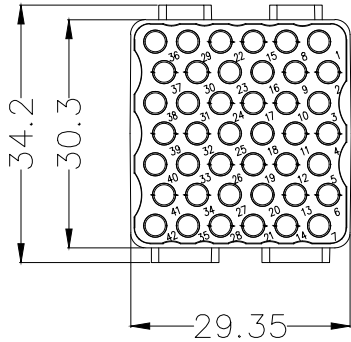

A

B

C

D

E

F

A

B

C

D

E

F

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FH2MDD01-M0420GY00	ITEM NO. FHMD0001	 Building Technology Cornerstone	
DESIGN UNITS mm				CHECKED BY GISELLE	DATE 05/Jul/21	TITLE Heavy-duty connector H2MDD Insert			
		DRAWN BY PYD	DATE 05/Jul/21	REV 0	SHEET NO. 1/1				
		SCALE 5:1	SIZE A4	X. ±0.30	X.* ±5*	X.XX ±0.15	X.XX* ±1*	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.X ±0.20	X.X* ±2*	X.XXX ±0.10	X.XXX* ±0.5*				

1 2 3 4 5 6 7 8