

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters




No. of contact: 42
Rated current:10A
Rated voltage:150V
Rated impulse voltage:2.5KV
Insulation resistance:10¹⁰Ω MIN
Temperature range:−40℃~+125℃
Pollution degree: 3

Mechanical

Connection method:Riveting
Durability:500 cycles MIN

Material and Plating

Insulators:PC(UL 94V-0),Light grey

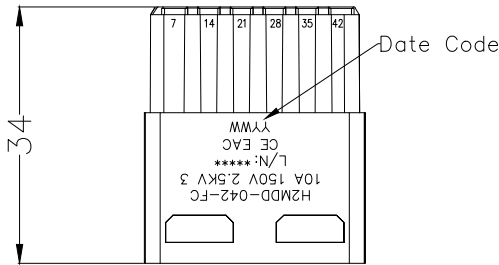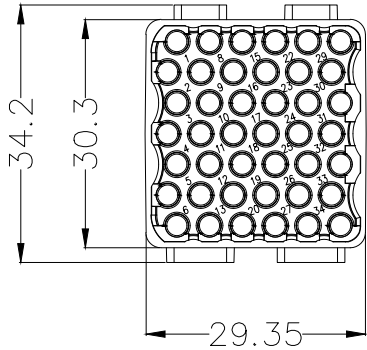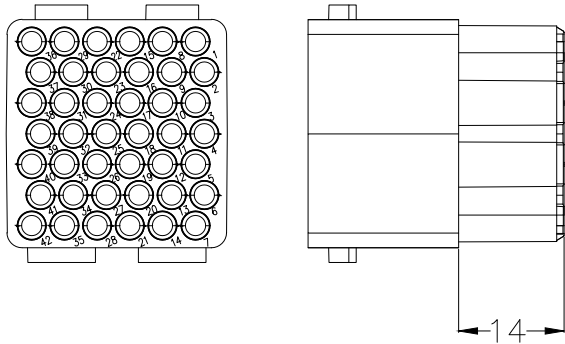

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FH2MDD02-F0420GY00	ITEM NO. FH2MDD02	 Building Technology Cornerstone		
		X. ±0.30	X.* ±5*	CHECKED BY GISELLE	DATE 05/Jul/21	TITLE Heavy-duty connector H2MDD Insert				
DESIGN UNITS mm		X.X ±0.20	X.X* ±2*	DRAWN BY PYD	DATE 05/Jul/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1*							
		X.XXX ±0.10	X.XX* ±0.5*							