

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

A

B

C

D

E

F

SPECIFICATION

Technical Parameters



No. of contact: 20
Rated current: 16A
Rated voltage: 500V
Rated impulse voltage: 6KV
Insulation resistance: $10^{10}\Omega$ MIN
Temperature range: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$
Pollution degree: 3

Mechanical

Connection method: Riveting
Durability: 500 cycles MIN

Material and Plating

Insulators: PC(UL 94V-0), Light grey

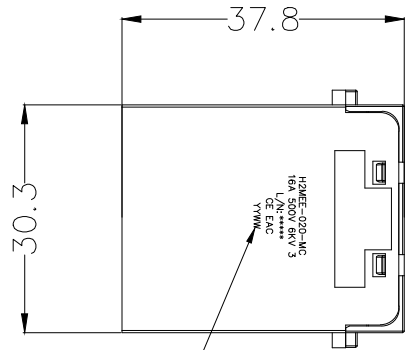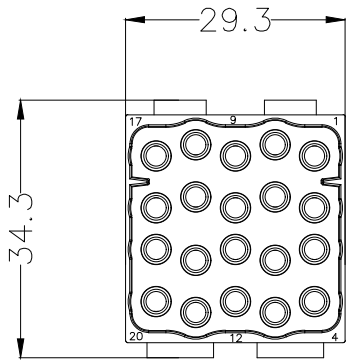

Date Code

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FH2MEE01-M0200GYR0		ITEM NO. FH2MEE01	 Building Technology Cornerstone	
				CHECKED BY GISELLE	DATE 05/Jul/21	TITLE Heavy-duty connector H2MEE Insert				
DESIGN UNITS mm		X. ± 0.30	X.* $\pm 5^{\circ}$	DRAWN BY PYD	DATE 05/Jul/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 0	SHEET NO. 1/1	
		X.X ± 0.20	X.X* $\pm 2^{\circ}$							
SCALE 5:1	SIZE A4	X.XX ± 0.15	X.XX* $\pm 1^{\circ}$							
		X.XXX ± 0.10	X.XXX* $\pm 0.5^{\circ}$							

1 2 3 4 5 6 7 8