


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters
No. of contact: 2
Rated current:100A
Rated voltage:1000V
Rated impulse voltage:8KV
Contact resistance:0.3mΩ MAX
Insulation resistance:10¹⁰Ω MIN
Temperature range:−40℃~+125℃
Pollution degree:3
Wire gauge:10~35mm²
Insulation diameter:14mm Max
Mechanical
Connection method: Riveting
Durability:500 cycles MIN
Material and Plating
Insulators:PC(UL 94V-0),Light grey

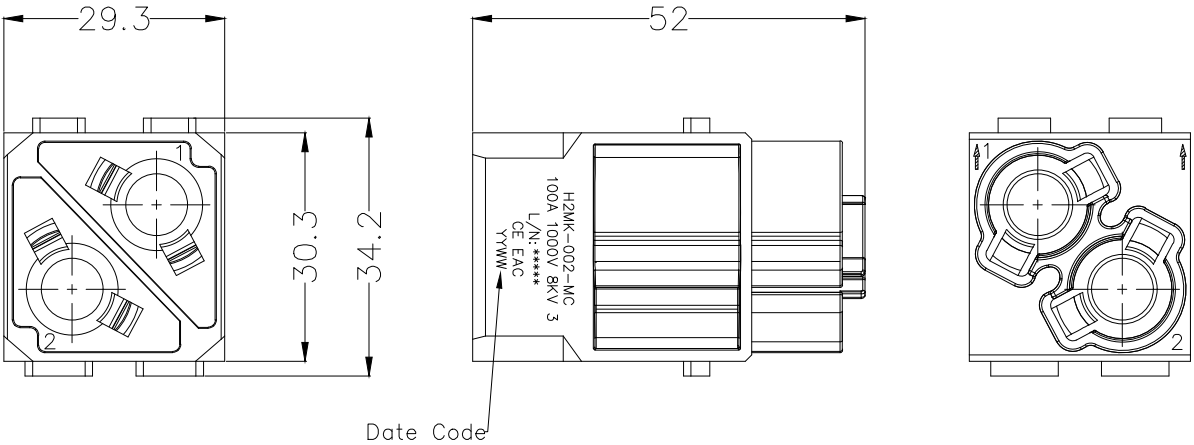

Date Code

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FH2MK003-M0020GYR0	ITEM NO. FHMK0003	 Building Technology Cornerstone		
DESIGN UNITS mm		X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 05/Jul/21	TITLE Heavy-duty connector FH2MK Insert			REV 0	SHEET NO. 1/1
		X.X ±0.20	X.X' ±2°							
		SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1°	DRAWN BY PYD	DATE 05/Jul/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		X.XXX ±0.10	X.XX' ±0.5°							