

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters


No. of contact: 2
Rated current:100A
Rated voltage:1000V
Rated impulse voltage:8KV
Contact resistance:0.3mΩ MAX
Insulation resistance:10¹⁰Ω MIN
Temperature range:−40°C~+125°C
Pollution degree:3
Wire gauge:10~35mm²
Insulation diameter:14mm Max

Mechanical

Connection method: Riveting
Durability:500 cycles MIN

Material and Plating

Insulators:PC(UL 94V-0),Light grey

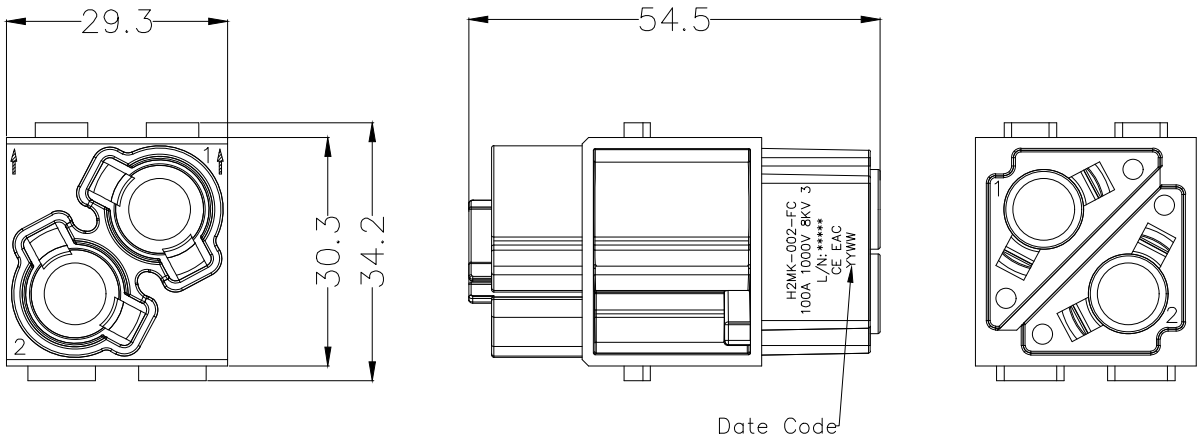

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FH2MK004-F0020GYR0	ITEM NO. FH2MK004	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector H2MK Insert			
DESIGN UNITS mm		X.X ±0.20	X.X' ±2°	GISELLE	05/Jul/21				
		X.XX ±0.15	X.XX' ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX' ±0.5°	PYD	05/Jul/21				