

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters





No. of contact: 3+PE
Rated current:10A
Phase-to-earth rated voltage:230V
Phase-to-phase rated voltage:400V
Rated impulse voltage:4KV
Contact resistance:1mΩ MAX
Wire gauge:0.75-1.5mm²(18-16 AWG)
Stripping length:4.5mm
Tightening Torque:0.25N.m
Insulation resistance:10¹⁰Ω MIN
Temperature range:-40℃~+125℃
Pollution degree:3

Mechanical

Connection method: Screw locking
Durability:500 cycles MIN

Material and Plating

Insulators:PC(UL 94V-0),Light grey
Terminal:copper alloy,silver plated
Sealing element: NBR

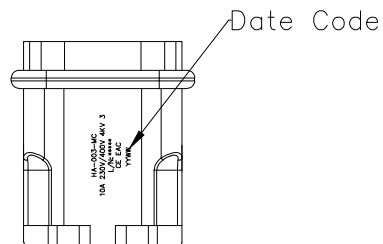

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHA00003-M0034GYE0	ITEM NO. FHA00003	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector HA Insert			
DESIGN UNITS mm		XX ±0.20	XX.* ±2°	GISELLE	05/Jul/21			REV 0	
SCALE 5:1	SIZE A4	XX.X ±0.15	XX.XX.* ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		XXX.XX ±0.10	XXX.XX.* ±0.5°	PYD	05/Jul/21				