


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION



Technical Parameters
 No. of contact: 10+PE
 Rated current:16A
 Rated voltage: 250V
 Rated impulse voltage: 4KV
 Contact resistance:1mΩ MAX
 Wire gauge: 0.14—4.0mm²(26—12 AWG)
 Insulation resistance: 10¹⁰Ω MIN
 Temperature range: -40℃~+125℃
 Pollution degree: 3

Mechanical
 Connection method: Riveting
 Durability: 500 cycles MIN

Material and Plating
 Insulators: PC(UL 94V-0),Light grey

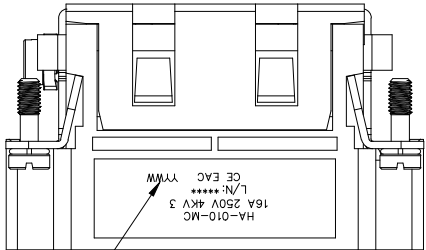

Date Code

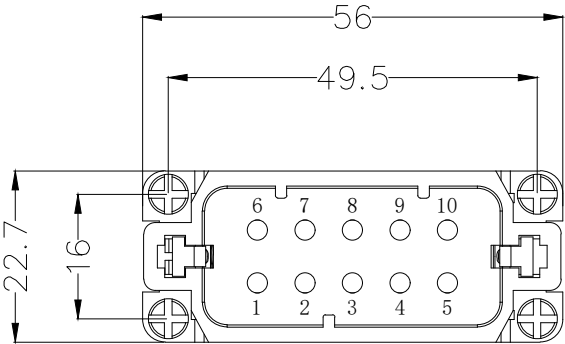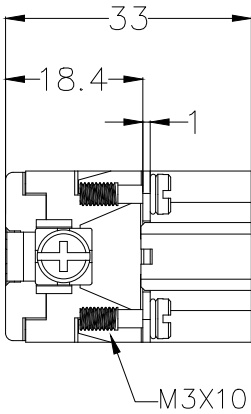

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHA00005-M0100GYR0	ITEM NO. FHA00005	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE			
DESIGN UNITS mm		X.X ±0.20	X.X* ±2°	GISELLE	05/Jul/21	Heavy-duty connector HA Insert		REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XX* ±0.5°	PYD	05/Jul/21				