
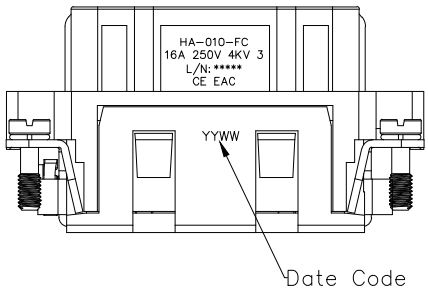
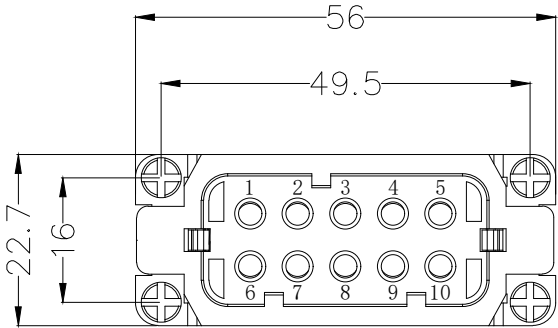


12345678

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters
No. of contact: 10+PE
Rated current:16A
Rated voltage:250V
Rated impulse voltage:4KV
Contact resistance:1mΩ MAX
Wire gauge:0.14—4.0mm²(26—12 AWG)
Insulation resistance:10¹⁰Ω MIN
Temperature range:−40℃~+125℃
Pollution degree:3
Mechanical
Connection method: Riveting
Durability:500 cycles MIN
Material and Plating
Insulators:PC(UL 94V−0),Light grey

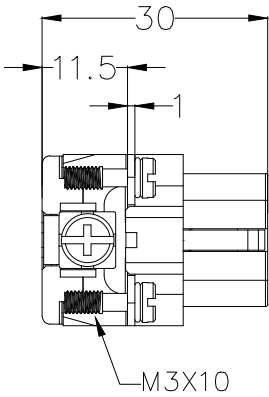

A

B

C

D

E

F

A

B

C

D

E

F

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHA00006-F0100GYR0	ITEM NO. FHA00006	 Building Technology Cornerstone	
DESIGN UNITS mm				CHECKED BY GISELLE	DATE 05/Jul/21				
		DRAWN BY PYD	DATE 05/Jul/21	REV 0	SHEET NO. 1/1				
						SCALE 5:1		SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
		X. ±0.30	X.* ±5°						
		X.X ±0.20	X.X* ±2°						
		X.XX ±0.15	X.XX* ±1°						
		X.XXX ±0.10	X.XXX* ±0.5°						

12345678