

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

A

B

C




D

E

F

SPECIFICATION

Technical Parameters
No. of contact:15+PE
Rated current:10A
Rated voltage:250V
Rated impulse voltage:4KV
Contact resistance:3mΩ MAX
Wire gauge:0.14—2.5mm²(26—14 AWG)
Rated voltage acc.to UL/CSA:600V
Insulation resistance:10¹⁰Ω MIN
Temperature range:—40°C~+125°C
Pollution degree:3
Mechanical
Connection method: Riveting
Durability:500 cycles MIN
Material and Plating
Insulators:PC(UL 94V—0),Light grey

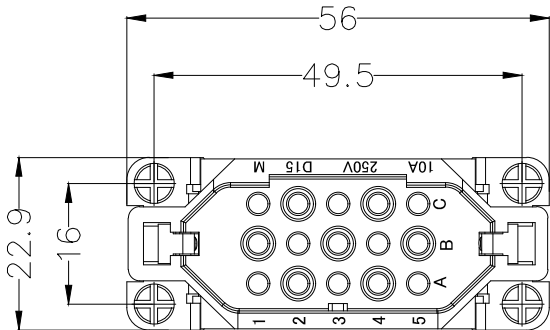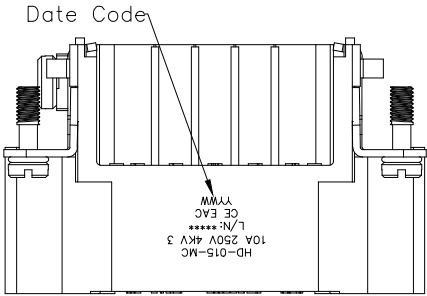

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FHD00007-M0150GYR0	ITEM NO. FHD00007	 Building Technology Cornerstone	
DESIGN UNITS mm				CHECKED BY GISELLE	DATE 30/JUN/21	TITLE Heavy-duty connector HD Insert			
		DRAWN BY PYD	DATE 30/JUN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
SCALE 5:1	SIZE A4	X. ±0.30	X.* ±5°			X.X ±0.20	X.X' ±2°	X.XX ±0.15	X.XX' ±1°
		X.XXX ±0.10	X.XXX° ±0.5°						