

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

A

B

C




D

E

F

SPECIFICATION

Technical Parameters
No. of contact:15+PE
Rated current:10A
Rated voltage:250V
Rated impulse voltage:4KV
Contact resistance:3mΩ MAX
Wire gauge:0.14—2.5mm²(26—14 AWG)
Rated voltage acc.to UL/CSA:600V
Insulation resistance:10¹⁰Ω MIN
Temperature range:—40℃~+125℃
Pollution degree:3
Mechanical
Connection method: Riveting
Durability:500 cycles MIN
Material and Plating
Insulators:PC(UL 94V—0),Light grey

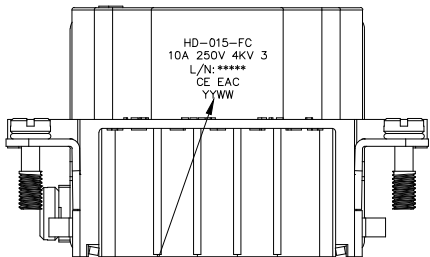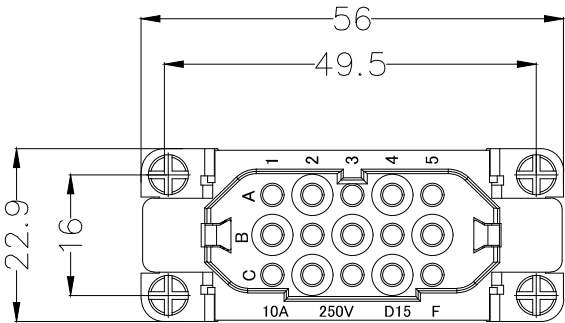

Date Code

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FHD00008—F0150GYR0	ITEM NO. FHD00008	 Building Technology Cornerstone		
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector HD Insert				
DESIGN UNITS mm		X.X ±0.20	X.X* ±2°	GISELLE	30/JUN/21				REV 0	SHEET NO. 1/1
		X.XX ±0.15	X.XX* ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX* ±0.5°	PYD	30/JUN/21					