

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD


SPECIFICATION

Technical Parameters


No. of contact: 24+PE
 Rated current: 10A
 Rated voltage: 250V
 Rated voltage acc.to UL/CSA: 600V
 Contact resistance: $3m\Omega$ MAX
 Wire gauge: $0.14-2.5mm^2$ (26-14 AWG)
 Rated impulse voltage: 4KV
 Insulation resistance: $10^{10}\Omega$ MIN
 Temperature range: $-40^{\circ}C \sim +125^{\circ}C$
 Pollution degree: 3

Mechanical


Connection method: Riveting
 Durability: 500 cycles MIN
 Material and Plating
 Insulators: PC(UL 94V-0), Light grey

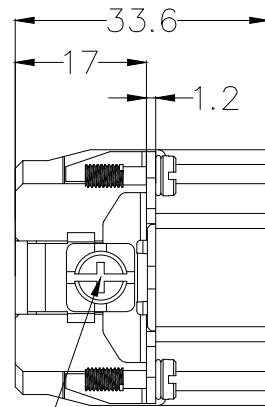


M4 SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2N.m

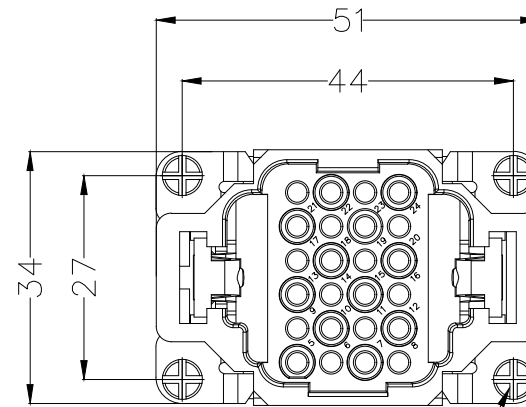

4XM3 SCREW, RECOMMENDED
TIGHTENING TORQUE 0.5N.m

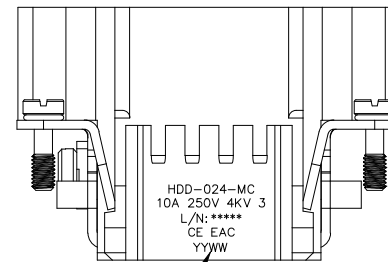

Date Code

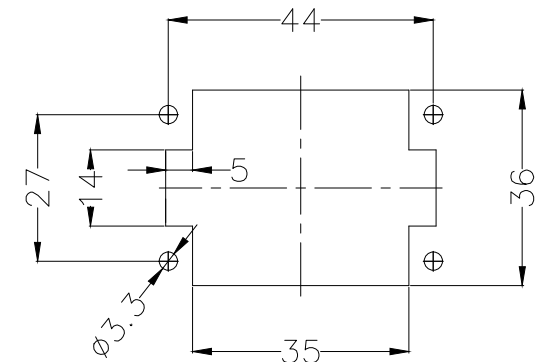

Recommended Panel Layout

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHDD0001-M0240GY00	ITEM NO. FHD00001	 Building Technology Cornerstone		
		X. ±0.30	X.* ±5'	CHECKED BY	DATE	TITLE Heavy-duty connector HDD Insert				
DESIGN UNITS mm		X.X ±0.20	X.X' ±2'	GISELLE	05/Jul/21			REV 0		SHEET NO. 1/1
		X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE					
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX' ±0.5'	PYD	05/Jul/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				