

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters

No. of contact: 42+PE

Rated current: 10A

Rated voltage: 250V

Rated voltage acc.to UL/CSA: 600V

Contact resistance: 3mΩ MAX

Wire gauge: 0.14–2.5mm²(26–14 AWG)

Rated impulse voltage: 4KV

Insulation resistance: 10¹⁰Ω MIN

Temperature range: –40°C~+125°C

Pollution degree: 3

Mechanical




Connection method: Riveting

Durability: 500 cycles MIN

Material and Plating

Insulators: PC(UL 94V–0), Light grey

Date Code

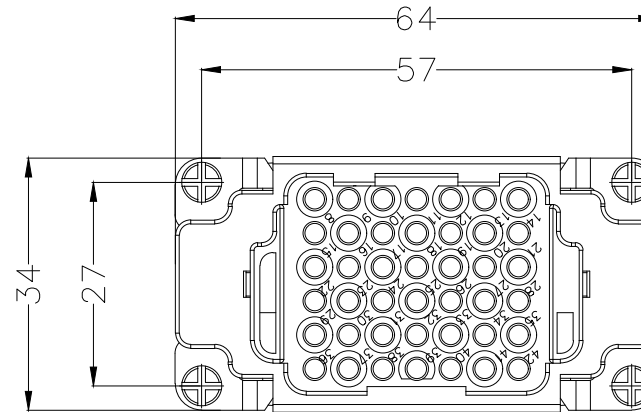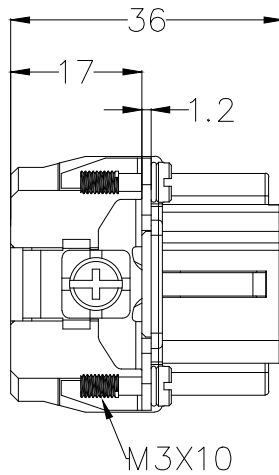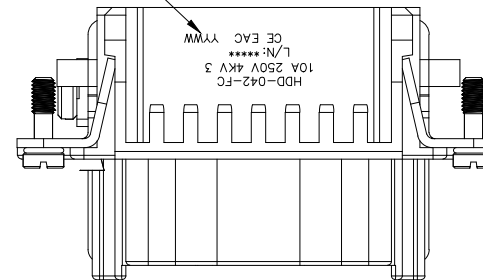

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHDD0004-F0420GYR0	ITEM NO. FHDD0004	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5'	CHECKED BY	DATE	TITLE			
DESIGN UNITS mm		XX ±0.20	XX' ±2'	GISELLE	05/Jul/21	Heavy-duty connector HDD Insert		REV 0	SHEET NO. 1/1
SCALE 5:1	SIZE A4	XXX ±0.15	XXX' ±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		XXX ±0.10	XXX' ±0.5'	PYD	05/Jul/21				

1 2 3 4 5 6 7 8