REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS
- No. of module: 6
- Wire gauge(PE contact):
  - Power side: 4–10mm²/(12–8 AWG)
  - Signal side: 1–2.5mm²/(18–14 AWG)
- Temperature Range–Operating: –40℃~+125℃
- Durability: 500 cycles MIN

Material and Plating
- Body: zinc die–cast
- PE Terminal: copper alloy,2μm Ni plated
- Mounting Screw: Iron nickel plated

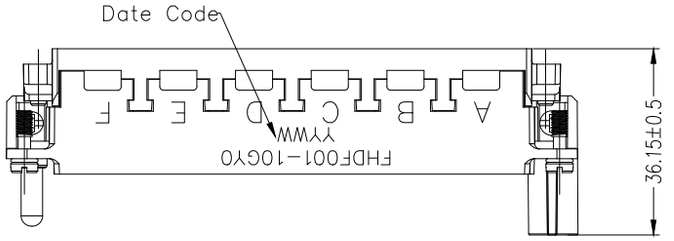



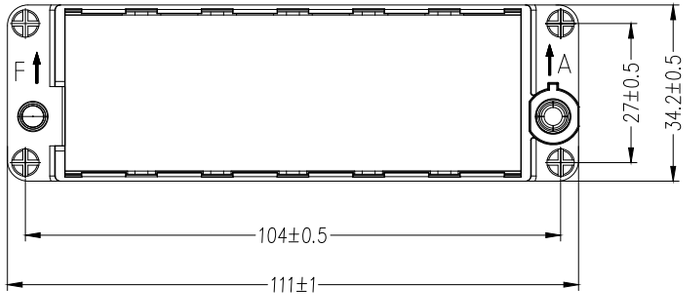

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 05/Jul/21	PART NO. FHDF001–10GY0	ITEM NO. FHDF001	TXGA Building Technology Cornerstone
DESIGN UNITS mm	X. ±0.30	X.° ±5°	CHECKED BY GISELLE	DATE 05/Jul/21	TITLE Heavy–duty connector HF24B Frame		
	X.X ±0.20	X.X° ±2°				REV 0	SHEET NO. 1/1
	X.XX ±0.15	X.XX° ±1°	DRAWN BY PYD	DATE 05/Jul/21			
SCALE 5:1 / SIZE A4	X.XXX ±0.10	X.XXX° ±0.5°			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		